



MISSOURI
HIGHWAYS and TRANSPORTATION
COMMISSION

JEFFERSON CITY, MISSOURI

BID

AND

SPECIFICATIONS

FOR
CONSTRUCTING OR IMPROVING

DISTRICT – 2

MAINTENANCE BUILDING SIDING

BOSWORTH & SWEET SPRINGS, MISSOURI

IFB 9 – 100921A

TABLE OF CONTENTS

DIVISION		PAGE
DIVISION 0 - BIDDING AND CONTRACT INFORMATION		
	FINAL CHECKLIST BEFORE SUBMITTING PROPOSAL	1
	NEWSPAPER ADVERTISEMENT Notice to Contractors	2
00020	INVITATION TO BID	3
00100	INSTRUCTIONS TO BIDDER	4
00301	BID FORM	14
00430	SUBCONTRACTOR LISTING	16
00600	BID BOND	17
01019	CONTRACT CONSIDERATIONS	18
01039	COORDINATION AND MEETINGS	20
01300	SUBMITTALS	23
01400	QUALITY CONTROL	27
01500	CONSTRUCTION FACILITIES AND TEMPORARY CONTROLS	29
01600	MATERIAL AND EQUIPMENT	32
01650	STARTING OF SYSTEMS	34
01700	CONTRACT CLOSEOUT	36
DIVISION 7 - THERMAL AND MOISTURE PROTECTION		
07210	BUILDING INSULATION	41
07212	BOARD INSULATION	43
07410	METAL WALL PANELS	45
07465	ALUMINUM SOFFIT PANELS	48
07600	FLASHING AND SHEET METAL	52
07900	JOINT SEALERS	56
	ANNUAL WAGE ORDER #17 CARROLL COUNTY	
	ANNUAL WAGE ORDER #17 SALINE COUNTY	
	BOSWORTH AND SWEET SPRINGS DRAWINGS	

"EXCESSIVE UNEMPLOYMENT IS IN EFFECT"

Only Missouri laborers and laborers from nonrestrictive states are allowed by law to be employed on Missouri's public works projects when the unemployment rate exceeds 5 percent for two consecutive months. **(See Sections 290.550 through 290.580 RSMo).**

Restrictive states are as follows: Alaska, Arizona, California, Colorado, Connecticut, Delaware, District of Columbia, Florida, Idaho, Illinois, Iowa, Maine, Massachusetts, Mississippi, Montana, Nevada, New Jersey, North Dakota, Oklahoma, South Dakota, and the U.S. Virgin Islands, West Virginia and Wyoming.

FINAL CHECKLIST BEFORE SUBMITTING PROPOSAL

- _____ 1. Complete the Bid Form by filling in the total dollar amount of the bid; listing any addenda which may have been issued; filling in the dollar amount of the bidder's check or Bid Bond, sign the proper signature line, and supply the required information in connection with the signature for the individual bidder, joint adventurer, or corporation.

- _____ 2. Submit Bid Bond executed by the bidder and surety. Bidders are required to use the Bid Bond furnished by the Commission or attach cashier's check to Bid Bond form. Personal checks are not accepted.

- _____ 4. Complete Subcontractor section by listing major subcontractor(s) and general supervisor(s), sign as required.

- _____ 5. Complete Certification Regarding Missouri Domestic Products Procurement Act section, if applicable.

- _____ 6. Complete Missouri Service-Disabled Veteran Business Preference, if applicable.

- _____ 7. If addenda(s) are issued attach to the back of the bid package. Copy addenda and add to the appropriate section of the orange bound Request for Proposal and retain for your records.

NEWSPAPER ADVERTISEMENT

Notice to Contractors

MoDOT will receive bids at its One Stop Office, General Services, Facilities, 1320 Creek Trail Drive, Jefferson City, MO until 3:00 PM Sept. 21, 2010 for installing siding on the Bosworth and Sweet Springs, MO maintenance buildings. Contact Lynn Ferguson at 573-751-4879 or Lynn.Ferguson@modot.mo.gov to obtain plans, forms, and information or download them at no charge from http://www.modot.mo.gov/business/contractor_resources/FacilitiesConstructionandMaintenance.htm.

00020

INVITATION TO BID

Notice is given hereby that the Missouri Department of Transportation will accept bids for construction of the project marked “**9-100914A Siding – Bosworth & Sweet Springs**”, according to Specifications and described in general as:

The installation of prefinished metal siding over 1-1/2” exterior rigid insulation with 2 x 4 blocking on all faces of the existing CMU buildings. Include installation of new aluminum soffit and fascia.

Sealed bids will be received by the Missouri Department of Transportation at its Central Office, General Service, Facilities Management, 1320 Creek Trail Drive, PO Box 270, Jefferson City, MO 65102-0270 until 3:00 P.M., September 21, 2010.

Bids will be opened and read aloud at that time and that place. Bids received after that time will not be accepted.

Contact Lynn Ferguson at 573-751-4879 or Lynn.Ferguson@modot.mo.gov to obtain plans, forms, and information or download them at no charge from http://www.modot.mo.gov/business/contractor_resources/FacilitiesConstructionandMaintenance.htm.

Prevailing wages as established by the Missouri Department of Labor and Industrial Relations, for Carroll and Saline, as shown herein will apply.

Bid securities in the amount of 5% of the bid will be required to accompany bids.

Bids must be made on forms provided by the Commission. The Commission reserves the right to reject any or all bids and to waive irregularity in the bids and the bidding. No bid may be amended or withdrawn after the bid is opened.

Interested contractors schedule site visits to inspect the proposed work location by contacting **Jon Kerns**. Jonathan.Kerns@modot.mo.gov **660-651-2109** or **660-385-5403**.

Route 139, Carroll County, Bosworth, MO 64623
Rt. 127, 0.1 Mi. N of I-70, Saline County, Sweet Springs, MO 65351

INSTRUCTIONS TO BIDDER

1. SCOPE OF WORK

The installation of prefinished metal siding over 1-1/2" exterior rigid insulation with 2 x 4 blocking on all faces of the existing CMU buildings. Include installation of new aluminum soffit and fascia.

2. BID INSTRUCTIONS

In order to receive consideration, bids must be made in strict accordance with the following.

- A. Make bids, upon the forms provided herein, properly signed and with all items filled out. Do not change the wording of the bid form and do not add words to the bid form. Unauthorized conditions, limitations or provisions attached to the bid will be cause for rejection of the bid.
- B. No telegraphic bid or telegraphic modification of a bid will be considered. No bids received after the time fixed for receiving them will be considered. Late bids will be returned to the bidder unopened.
- C. Address bids to the Missouri Department of Transportation, and deliver to the address given in the Invitation for Bid, on or before the day and hour set for opening the bids. Enclose each bid in a sealed envelope bearing the title of the Work, the name of the bidder, and the date and hour of the bid opening. Submit only the original signed copy of the bid. It is the sole responsibility of the bidder to see that the bid is received on time.

3. BIDDING BONDS

- A. Each proposal shall be accompanied by a Bid Bond, Certified Check, Cashier's Check or Bank Money Order payable to the Director of Revenue – Credit State Road Fund for an amount equal to Five Percent (5%) of the amount of the BID submitted. This is to act as a guarantee that the bidder, if awarded the contract, will furnish an acceptable performance and payment bond (Contract Bond) or a cashier's check, a bank money order or a certified check made payable to "Director of Revenue--Credit State Road Fund" in an amount equal to One Hundred (100%) of the contract price.
- B. If a BID BOND is used (in lieu of a certified check, cashier's check, or bank money order), it must be in the form provided and executed by the bidder as principal and by a surety company authorized to do business in the State of Missouri as surety. The agent executing the same on behalf of the surety company must attach a current Power of Attorney setting forth his authority to execute the bond involved.
- C. Certified Checks, Cashier's Checks or Bank Money Orders of unsuccessful bidders will be returned as soon as the award is made. The checks or bank money orders of the successful bidder(s) will be retained until the contract is executed and a satisfactory Performance and Payment (Contract Bond) is furnished. Bid Bonds will not be returned except on specific request of the bidder.

4. INVOICING AND PAYMENT

- A. MoDOT is exempt from paying Missouri Sales Tax, Missouri Use Tax and Federal Excise Tax. However, the successful bidder to whom the contract is awarded, (hereinafter, "contractor") may themselves be responsible for the payment of taxes on materials they purchase to fulfill the contract. A Project Tax Exemption Certificate will be furnished to the successful bidder upon request if applicable.
- B. Each invoice should be itemized in accordance with items listed on the contract in accordance with Section 01019, Contract Considerations, Applications for Payment provisions. Failure to comply with this requirement may delay processing of invoices for payment.
- C. Unless otherwise provided for in the solicitation documents, payment for all equipment, supplies, and/or services required herein shall be made in arrears. The Commission shall not make any advance deposits.
- D. The Commission assumes no obligation for equipment, supplies, and/or services shipped or provided in excess of the quantity ordered. Any authorized quantity is subject to the Commission's rejection and shall be returned at the Contractor's expense.
- E. The Commission reserves the right to purchase goods and services using the state-purchasing card.

5. EXAMINATION OF DOCUMENTS AND SITE OF WORK

- A. Before submitting a bid, each bidder shall examine the Drawings carefully, read the Specifications and all other proposed Contract Documents, and visit the site of the work. Each bidder shall fully inform themselves, prior to bidding, as to existing conditions and limitations under which the Work is to be performed and shall include in his bid a sum to cover the cost of items necessary to perform the Work, as set forth in the proposed Contract Documents. No allowance will be made to a bidder because of lack of such examination or knowledge. The submission of a bid will be considered conclusive evidence that the bidder has made such examination.
- B. The contract price shall include any necessary permits and licenses required by law incidental to the work. Local ordinances requiring building permits are not applicable to the state. Contractor will comply with local laws involving safety in the prosecution of the work.

6. INTERPRETATION

No oral interpretations will be made to any bidder as to the meaning of the plans and specifications or the acceptability of alternate products, materials, form or type of construction. Every request for interpretation shall be made in writing and submitted with all supporting documents not less than ten (10) days before opening of bids. The request shall be sent directly to the Senior Facilities Designer. Every interpretation made to a bidder will be in the form of an addendum and will be sent as promptly as is practicable to all persons to whom plans and specifications have been issued. All such addenda shall become part of the contract documents.

7. PROOF OF COMPETENCY OF BIDDER

A bidder may be required to furnish evidence, satisfactory to the Commission, that he and his proposed subcontractor(s) have sufficient means and experience in the types of work called for to assure completion of the Contract in a satisfactory manner.

8. WITHDRAWAL OF BIDS

After the bid/proposal opening, a vendor may be permitted to withdraw a bid/proposal prior to award at the sole discretion of the division if there is a verifiable error in the bid/proposal and enforcement of the bid would impose an unconscionable hardship on the vendor. This withdrawal will be considered only after receipt of a written request and supporting documentation from the vendor. Withdrawal shall be the vendor's sole remedy for an error other than an obvious clerical error. Withdrawal of a bid/proposal may result in forfeiture of the bid/proposal bond.

9. AWARD OR REJECTION OF BIDS

- A. The Contract, if awarded, will be awarded to the responsible bidder who has proposed the lowest Contract Sum, subject to the Commission's right to reject any or all bids and to waive informality and irregularity in the bids and in the bidding.
- B. Award of alternates, if any, will be made in numerical order to result in the maximum amount of work being accepted within available construction funds.

10. CONTRACT DOCUMENTS

- A. By submitting a bid, the bidder agrees to furnish any and all equipment, supplies and/or construction services specified in the solicitation documents, at the price(s) stated in their bid, pursuant to all requirements and specifications contained therein.
- B. A binding contract, contract documents, shall consist of: (1) the solicitation documents with any drawings and/or attachment/exhibits, amendments thereto, and/or Best and Final Offer (BAFO) request(s) with any changes/additions, (2) the Contractor's submitted pricing, and (3) the Commission's acceptance of the bid by purchase order or post-award contract.
- C. A notice of award does not constitute an authorization for shipment of equipment or supplies or a directive to proceed with services. Before providing equipment, supplies and/or services, the Contractor must receive a properly authorized purchase order and/or notice to proceed.

- D. The contract expresses the complete agreement of the parties and performance shall be governed solely by the specifications and requirements contained therein. Any change, whether by modification and/or supplementation, must be accomplished by a formal contract amendment signed and approved by and between the duly authorized representative of the Contractor and the duly authorized representative of the Commission, by a modified purchase order prior to the effective date of such modification. The Contractor expressly and explicitly understands and agrees that no other method and/or no other document, including correspondence, acts, and oral communications by or from any person, shall be used or construed as an amendment or modification.
- E. Failure to execute the contract and file acceptable performance payment (Contract Bond) or cashier's check, bank money order or certified check within 15 days after the contract has been mailed to the bidder shall be just cause for the cancellation of the award and the forfeiture of the proposal guaranty. Award may then be made to the next lowest responsible bidder, or the work may be re-advertised and performed under contract or otherwise, as the Commission may decide. No contract shall be considered effective until it has been executed by all parties thereto.

11. N ONDISCRIMINATION

- A. The successful bidder understands that this project involves state funds and the successful bidder awarded the contract will be required to comply with the Executive Order 05-30 of the Governor of the State of Missouri dated September 8, 2005. This order stipulates that there shall be no discriminatory employment practices by the Contractor or his subcontractors, if any, based on race, sex, religion, national origin, age, color, disability, or veteran status. The undersigned Contractor or his subcontractors, if any, shall give written notice of their commitments under this clause to any labor union with which they have bargaining or other agreements.
- B. The Contractor shall comply with the Regulations relative to nondiscrimination in federally-assisted programs of the Department of Transportation, Title 49, Code of Federal Regulations, Part 21, as they may be amended from time to time, (hereinafter referred to as the Regulations), which are herein incorporated by reference and made a part of this contract.
- C. All solicitations either by competitive bidding or negotiation made by the Contractor for work to be performed under a subcontract, including procurements of materials or leases of the Contractor's obligations under this contract and the Regulations, will be relative to nondiscrimination on the grounds of race, color, or national origin.
- D. Sanctions for Noncompliance: In the event of the Contractor's noncompliance with the nondiscrimination provisions of this contract, MoDOT shall impose such contract sanctions as it or the Federal Highway Administration may determine to be appropriate, including, but not limited to: (i) withholding of payments to the Contractor under the contract until the Contractor complies, and/or, (ii) cancellation, termination or suspension of the contract, in whole or in part.

12. SUBMITTALS

Review of Submittals. The General Services Facilities Manager's review of submittals is only for the limited purpose of checking for conformance with information given and seeing if they conform to design intent. The General Services Facilities Manager is not responsible for determining the accuracy of measurements and completeness of details, for verifying quantities, or for checking fabrication or installation procedures. The General Services Facilities Manager's review does not relieve the contractor of his or her responsibilities under the contract documents. The submittal process shall be carried out as outlined in Section 01300, Submittals.

13. WORK QUALITY

- A. Inspection of Work. General Services Facilities Manager shall be permitted to inspect all work, materials, payrolls, records of personnel, invoices of materials, and other data and records relating to the work. If requested by General Services Facilities Manager, the contractor shall at any time before final acceptance of the work uncovers any portion of the finished work as directed for inspection. After examination, the contractor shall restore said portions of the work to the standards required by the contract. Should the work thus exposed and examined prove acceptable, the actual cost of uncovering, removing and replacing shall be paid by the Commission. Should the work so exposed and examined prove unacceptable, the uncovering, removing and replacing shall be at the expense of the contractor.

- B. Defective Work. All work which has been rejected shall be remedied, or if necessary, removed and replaced in an acceptable manner by the contractor at its expense. If the contractor fails to remedy or replace such defective work immediately after receiving written notice from the General Service Facilities Manager, the Commission may employ labor to correct the defective work, and the cost incurred in making such corrections shall be deducted from the payment due or to become due the contractor under this contract.
- C. Contractor will provide a one-year warranty for parts and labor on all building material, and equipment or a standard manufacturer's warranty which ever is greater. All warranties, including extended service agreements shall begin on the date of Final Acceptance of this project.
- D. Contractor's Responsibility for Work. Until General Services Facilities Manager accepts the work, it shall be in the custody and under the charge and care of the contractor. Contractor shall rebuild, repair, restore or make good at its own expense any lost or stolen Commission-owned material and all injuries or damages to any portion of the work caused by action of the elements or from any other reason before its completion and final acceptance. Issuance of a payment estimate on any part of the work done will not be considered as final acceptance of any work completed up to that time.
- E. Preservation of Utilities and Monuments. The contractor shall be responsible for the preservation of all public and private utilities, wires, lines, pipes, poles, cables, and conduit at the site of the work and shall use every precaution necessary to prevent damage or injury thereto. The contractor shall not disturb or damage any land monument or property landmark until an authorized agent has witnessed or otherwise referenced, their location and shall not remove them until directed by General Services Facilities Manager.
- F. Cooperation with Other Contractors. The contractor shall arrange its work so as not to interfere with the operations of other contractors of the Commission which might be engaged in performing adjacent or nearby work. Whenever work being done by other contractors is contiguous or related to the work involved in this contract, the respective rights of the various contractors will be determined by the General Services Facilities Manager in order to secure the completion of the work under all contracts in general harmony.
- G. The contractor will be required to remove from the Commission's property all debris.
- H. Temporary Suspension of Work. General Services Facilities Manager shall have authority to suspend work, wholly or in part, for such period or periods of time as he may deem necessary when weather or other conditions are such that in the opinion of the General Services Facilities Manager the work may be done at a later time with advantage to the Commission or for failure on the part of the contractor to comply with any of the provisions of the contract. The contractor may suspend work for reasonable cause with written approval of the General Services Facilities Manager. Liquidated damages shall not accrue during the period in which work is suspended with the approval of the General Services Facilities Manager, however, if the suspension is because of the contractor's failure to comply to any of the provisions of the contract, the contractor shall not be entitled to an extension of completion time nor to a waiver of liquidated damages. In the event work is suspended, the contractor shall store all materials in a manner that will protect them from damage, and shall take every precaution to prevent damage or deterioration of, the portions of the work completed. If work has been discontinued for any reason, the contractor shall give General Services Facilities Manager written notice at least forty-eight (48) hours before resuming operations.

14. CHANGE ORDERS

- A. General. All departures from the plans and specifications will be considered unauthorized unless, before proceeding with the work, the contractor has had delivered to it a change order, signed by the General Service Facilities Manager, authorizing and directing such changes or departures. All unauthorized work shall be at the contractor's expense and the General Services Facilities Manager may order such unauthorized work removed and replaced at the contractor's expense.
- B. Overhead and Profit on Change Orders. The percentages for overhead and profit charged on Change Orders and Field Work Authorizations shall be negotiated and may vary according to the nature, extent and complexity of the work involved. However, the overhead and profit for the contractor or subcontractor actually performing the work shall not exceed 15%. When one or more tiers of subcontractors are used, in no event shall any contractor or subcontractor receive as overhead and profit more than 7% of the cost of the work performed by any of his subcontractors. In no case shall the total overhead and profit paid by the owner on any change order exceed twenty five percent (25%) of the cost of materials, labor and equipment necessary to put the change order work in place.

- C. Contractor's Procedure for Claims. If the contractor considers additional compensation may be due for work or material not clearly covered in the contract or ordered in writing by the General Services Facilities Manager as extra work, or if additional compensation may be requested beyond the scope of such provisions, the contractor shall notify the General Services Facilities Manager in writing of the intention to make a claim before beginning the work in question. If notification is not given and the General Services Facilities Manager is not afforded proper facilities by contractor to provide necessary inspection and for keeping strict account of actual cost, the contractor agrees to waive any claims for additional compensation. Notice by the contractor, and the fact that the General Services Facilities Manager has kept account of the cost shall not be construed as substantiating the validity of the claim. The contractor shall file a written notice of claim for additional compensation in triplicate within 60 days after completing the work in question.
- a. If the claim is against the Commission, the notice of claim shall be personally delivered, or sent by certified mail to the office of the Secretary of the Commission in Jefferson City, Missouri. All notices of claims shall contain an itemized statement showing completely and fully the items and amounts forming the basis of the claim.
 - b. Any claim or an item of any claim, not included in the notice and statement, or any claim included but not clearly defined and specifically set out and itemized or any claim not filed within the time and in the manner provided, shall be forever waived and shall neither constitute the basis of nor be included in any legal action, counterclaim, set-off, or arbitration.
 - c. All claims filed with Missouri Highway and Transportation Commission's Secretary will be forwarded to the Missouri Department of Transportation's Claims Committee.

15. INSURANCE

- A. The Contractor shall maintain or cause to be maintained at Contractor's own expense commercial general liability, automobile liability, and worker's compensation insurance against negligent acts, errors or omissions of the Contractor, or its subcontractors and anyone directly or indirectly employed by any of them. Any insurance policy required as specified in this Section shall be written by a company that is licensed and authorized to issue such insurance in the state of Missouri and shall provide insurance coverage for not less than the following limits of liability:
- a. General Liability: Not less than \$500,000 for any one person in a single accident or occurrence, and not less than \$3,000,000 for all claims arising out of a single occurrence;
 - b. Automobile Liability: Not less than \$500,000 for any one person in a single accident or occurrence, and not less than \$3,000,000 for all claims arising out of a single occurrence;
 - c. Missouri State Workmen's Compensation policy or equivalent in accordance with state law.
 - d. Upon request from the Commission, the Contractor shall provide the Commission with certificates of insurance evidencing the required coverage and that such insurance is in effect.

16. CONSTRUCTION TIME AND LIQUIDATED DAMAGES

- A. Time of Completion - If this bid is accepted, it is hereby agreed that work will begin not later than the date specified in the "Notice to Proceed" and will diligently be prosecuted in order to complete the work and billing within 20-working days from the date specified. Completion of work will be based on FINAL ACCEPTANCE of the building; "SUBSTANTIAL COMPLETION" will not be accepted as basis for completion.
- B. Liquidated Damages - In the event the successful Contractor fails to deliver the material within the time specified, the Department and the public will sustain damages because of such delay in delivery, the exact extent of which would be difficult to ascertain, and in order to liquidate such damage in advance it is agreed that the sum of one-hundred dollars (\$100.00) per day, per item, for each assessable calendar day on which the delivery has not been completed, is reasonable and the best estimate which the parties can arrive at as liquidated damages, and it is therefore agreed that said amount will be withheld from payments due the Contractor or otherwise collected from the Contractor as liquidated damages. Saturdays, Sundays, holidays and days whereas the Department has suspended work shall not be assessable days.
- C. A working day. Is defined as any day when, soil and weather conditions would permit the major operation of the project for

six hours or more unless other unavoidable conditions prevent the contractor's operation. If conditions require the contractor to stop work in less than six hours, the day will not be counted as a working day. Working days will begin as soon as notice to proceed is issued. In order for MoDOT not to change a workday due to unavoidable conditions, the contractor must have enough forces, equipment, and materials on site to begin the project. The contractor must notify MoDOT inspector before 12:00 noon of said working day if forces will not be present.

17. EXECUTIVE ORDER

- A. The Contractor shall comply with all the provisions of Executive Order 07-13, issued by the Honorable Matt Blunt, Governor of Missouri, on the sixth (6th) day of March, 2007. This Executive Order, which promulgates the State of Missouri's position to not tolerate persons who contract with the state engaging in or supporting illegal activities of employing individuals who are not eligible to work in the United States, is incorporated herein by reference and made a part of this Agreement.
 - B. "By signing this Agreement, the Contractor hereby certifies that any employee of the Contractor assigned to perform services under the contract is eligible and authorized to work in the United States in compliance with federal law."
 - C. In the event the Contractor fails to comply with the provisions of the Executive Order 07-13, or in the event the Commission has reasonable cause to believe that the contractor has knowingly employed individuals who are not eligible to work in the United States in violation of federal law, the Commission reserves the right to impose such contract sanctions as it may determine to be appropriate, including but not limited to contract cancellation, termination or suspension in whole or in part or both.
 - D. The Contractor shall include the provisions of this paragraph in every subcontract. The Contractor shall take such action with respect to any subcontract as the Commission may direct as a means of enforcing such provisions, including sanctions for noncompliance.
18. Missouri law, 292.675 RSMo, requires the Contractor and its subcontractor(s) to provide a ten-hour occupational safety and health administration (OSHA) construction safety program (or a similar program approved by the Missouri Department of Labor and Industrial Relations as a qualified substitute) for their on-site employees (laborers, workmen, drivers, equipment operators, and craftsmen) who have not previously completed such a program and are directly engaged in actual construction of the improvement (or working at a nearby or adjacent facility used for construction of the improvement). The Contractor and its subcontractor(s) shall require all such employees to complete this ten-hour program, pursuant to 292.675 RSMo, unless they hold documentation on their prior completion of said program. Penalties for non-compliance include Contractor forfeiture to the Commission in the amount of \$2,500, plus \$100 per contractor and subcontractor employee for each calendar day such employee is employed beyond the elapsed time period for required program completion under 292.675 RSMo.

19. EMPLOYMENT OF UNAUTHORIZED ALIENS

- A. Pursuant to RSMo 285.530 (1), no business entity or employer shall knowingly employ, hire for employment, or continue to employ an unauthorized alien to perform work within the state of Missouri. As a condition for the award of any contract or grant in excess of five thousand dollars by the state or by any political subdivision of the state to a business entity, or for any business entity receiving a state-administered or subsidized tax credit, tax abatement, or loan from the state, the business entity shall, by sworn affidavit and provision of documentation, affirm its enrollment and participation in a federal work authorization program with respect to the employees working in connection with the contracted services. Every such business entity shall sign an affidavit affirming that it does not knowingly employ any person who is unauthorized alien in connection with the contracted services. [RSMO 285.530 (2)] A copy of the affidavit referenced above is provided within this document.
- B. E-Verify is an example of a federal work authorization program. Acceptable enrollment and participation documentation consists of **completed** copy of the E-Verify Memorandum of Understanding (MOU). For vendors that are not already enrolled and participating in a federal work authorization program, E-Verify is available at http://www.dhs.gov/xprevprot/programs/gc_1185221678150.shtm.

20. PREFERENCES

- A. In the evaluation of bids, preferences shall be applied in accordance with Chapter 34 RSMo. Contractors should apply the same preferences in selecting subcontractors.

- B. By virtue of statutory authority, RSMo. 34.076 and 34.350 to 34.359, a preference will be given to materials, products, supplies, provisions and all other articles produced, manufactured, made or grown within the State of Missouri. Such preference shall be given when quality is equal or better and delivered price is the same or less.
- 1) If attached, the document entitled “PREFERENCE IN PURCHASING PRODUCTS” should be completed and returned with the solicitation documents.
 - 2) If attached, the document entitled “MISSOURI DOMESTIC PRODUCTS PROCUREMENT ACT” should be completed and returned with the solicitation documents. Applies if bid is Twenty-Five Thousand Dollars (\$25,000.00) or more.
- C. By virtue of statutory authority, RSMo 34.074, a preference will be given all contracts for the performance of any job or service to service-disabled veteran business either doing business as Missouri firms, corporations, or individuals; or which maintain Missouri offices or places of business, when the quality of performance promised is equal or better and the price quoted is the same or less or whenever competing bids, in their entirety, are comparable.
- 1) If attached, the document entitled “MISSOURI SERVICE-DISABLED VETERAN PREFERENCE” should be completed and returned with the solicitation documents.
- D. In the event of a tie of low bids, the MHTC reserves the right to establish the method to be used in determining the award.

PREFERENCES IN PURCHASING PRODUCTS

DATE: _____

The bidders attention is directed to Section 34.076 RSMo 2000 which gives preference to Missouri corporations, firms, and individuals when letting contracts or purchasing products.

Bids/Quotations received will be evaluated on the basis of this legislation.

All vendors submitting a bid/quotation must furnish ALL information requested below.

FOR CORPORATIONS:

State _____ in which incorporated: _____

FOR OTHERS:

State of domicile: _____

FOR ALL VENDORS:

List _____ address of Missouri offices or places of business:

THIS SECTION MUST BE COMPLETED AND SIGNED:

FIRM NAME: _____

ADDRESS: _____

CITY: _____ STATE: _____ ZIP: _____

BY (signature required): _____

Federal Tax I.D. #: _____ if no Federal Tax I.D. # - list Social Security #: _____

NOTE: For bid/quotation to be considered, the "Preference in Purchasing Products" form must be on file in the General Services (Procurement) Division and must be dated in the current calendar year.

MISSOURI DOMESTIC PRODUCTS PROCUREMENT ACT

The bidder’s attention is directed to the Missouri Domestic Products Procurement Act, Sections 34.350 to 34/359, RsMO, which requires all manufactured goods or commodities used or supplied in the performance of this contract or any subcontract to be manufactured or produced in the United States.

Section 34.355, RsMO, requires the vendor or contractor to certify his compliance with Section 34.353 and, if applicable, Section 34.359, RsMO, at the time of bidding and prior to payment. Failure to comply with Section 34.353, RsMO, during the performance of the contract and to provide certification of compliance prior to payment will result in nonpayment for those goods or commodities.

Section 34.353.2, RsMO, specifies that it does not apply where the total contract is less than Twenty-Five Thousand Dollars (\$25,000.00). If your total bid is Twenty-Five Thousand Dollars (\$25,000.00) or more, you must complete this form as directed below.

Failure to complete and return this document with this bid will cause the State to presume the manufactured goods or products listed in the bid are not manufactured or produced in the United States, and the bid will be evaluated on that basis. Please read the certification appearing below on this form.

If all the goods or products specified in the attached bid which the bidder proposes to supply to the State shall be manufactured or produced in the “United States” as defined in Section 34.350, RsMO, check the box at left.

If only one item of any particular goods or products specified in the attached bid is manufactured or produced in the “United States” as defined in Section 34.350, RsMO, check the box at left and list the items (or item number) here:

If any or all of the goods or products specified in the attached bid which the bidder proposes to supply to the State are not manufactured or produced in the “United States” as defined in Section 34.350, RsMO, then: (a) check the box at left; (b) list below, by item (or item number), the country other than the United States where each good or product is manufactured or produced; and (c) check the boxes to the left of the paragraphs below if applicable and list the corresponding items (or item numbers) in the spaces provided.

Item (or item number)	Location Where Item Manufactured or Produced

(attach an additional sheet if necessary)

The following specified goods or products cannot be manufactured or produced in the United States in sufficient quantities or in time to meet the contract specifications. Items (or item numbers): _____

The following specified goods or products must be treated as manufactured or produced in the United States, in accordance with an existing treaty, law, agreement, or regulation of the United States, including a treaty between the United States and any foreign country regarding export-import restrictions or international trade. Items (or item numbers): _____

CERTIFICATION

By submitting this document, completed as directed above, with a bid, the bidder certifies under penalty of making false declaration (Section 575.060, RsMO) that the information contained in this document is true, correct and complete, and may be relied upon by the State in determining the bidders qualifications under and in compliance with the Missouri Domestic Products Procurement Act.

The bidder’s failure to complete and return this document with the bid as directed above will cause the State to presume the manufactured goods or products listed in the bid are not manufactured or produced in the United States, and the bid will be evaluated on that basis pursuant to Section 34.353.3(2), RsMO.

MISSOURI SERVICE-DISABLED VETERAN BUSINESS PREFERENCE

By virtue of statutory authority, RSMo 34.074, a preference will be given all contracts for the performance of any job or service to service-disabled veteran business either doing business as Missouri firms, corporations, or individuals; or which maintain Missouri offices or places of business, when the quality of performance promised is equal or better and the price quoted is the same or less or whenever competing bids, in their entirety, are comparable.

Definitions:

Service-Disabled Veteran is defined as any individual who is disabled as certified by the appropriate federal agency responsible for the administration of veterans' affairs.

Service-Disabled Veteran Business is defined as a business concern:

- a. Not less than fifty-one (51) percent of which is owned by one or more service-disabled veterans or, in the case of any publicly owned business, not less than fifty-one (51) percent of the stock of which is owned by one or more service-disabled veterans; and
- b. The management and daily business operations of which are controlled by one or more service-disabled veterans.

If an bidder meets the definitions of a service-disabled veteran and a service-disabled veteran business as defined in 34.074 RSMo and is either doing business as a Missouri firm, corporation, or individual; or maintains a Missouri office or place of business, the bidder must provide the following with the proposal in order to receive the Missouri service-disabled veteran business preference over a non-Missouri service-disabled veteran business when the quality of performance promised is equal or better and the price quoted is the same or less or whenever competing proposals, in their entirety, are comparable:

- a. A copy of a letter from the Department of Veterans Affairs (VA), or a copy of the bidder's discharge paper (DD Form 214, Certificate of Release or Discharge from Active Duty) from the branch of service the bidder was in, stating that the bidder has a service-connected disability rating ranging from 0 to 100% disability; and
- b. A completed copy of this exhibit

(NOTE: For ease of evaluation, please attach copy of the above-referenced letter from the VA or a copy of the bidder's discharge paper to this Exhibit.)

By signing below, I certify that I meet the definitions of a service-disabled veteran and a service-disabled veteran business as defined in 34.074 RSMo and that I am either doing business as a Missouri firm, corporation, or individual; or maintain Missouri offices or places of business at the location(s) listed below.

Veteran Information

Business Information

Service-Disabled Veteran's Name, (Please Print)

Service-Disabled Veteran Business Name

Service-Disabled Veteran's Signature

Missouri Address of Service-Disabled Veteran Business

BID FORM

To: The Missouri Highway and Transportation Commission
PO Box 270
Jefferson City, Missouri 65102

1. The undersigned, having examined the proposed Contract Documents titled: **“9-100914A Siding – Bosworth & Sweet Springs”** and having visited the site and examined the conditions affecting the work, hereby proposes and agrees to furnish all labor, materials, equipment and everything which may be necessary or incidental thereto, as proposed by said Contract Documents, all to the satisfaction of the General Services Facilities Manager of the Missouri Department of Transportation and the Missouri Highway and Transportation Commission, for the stipulated sum of:

Bosworth _____ DOLLARS (\$ _____).

Sweet Springs _____ DOLLARS (\$ _____).

2. The undersigned, acknowledges having examined and being familiar with the contract documents including the drawings, the Instructions to Bidders, General Conditions, Supplementary Conditions and the body of technical specifications.
3. The undersigned acknowledges receipt of Addenda number _____ through _____ inclusive.
4. Enclosed with this bid is bid security in the amount of not less than 5% of the bidder's proposed Contract Sum, the amount being _____ DOLLARS (\$ _____).

IF AN INDIVIDUAL

_____	_____
Name of individual	Residence address

_____	_____
Social Security Number	Telephone Number

Firm Name, If Any

_____	_____
Address for communications	Signature

IF A PARTNERSHIP

_____		(State Name and Residence Address of All Partners)
Name of Partnership	_____	_____
	-	_____
Partner	R	_____
		Residence Address
	-	_____
Partner	R	_____
		Residence Address
_____		_____
		Federal Tax I.D. Number
_____		_____
Address for Communications		Signature of Either Partner

Telephone Number		

IF A CORPORATION

_____		Incorporated under the laws of the
Name of Corporation		State of _____
_____		Corporate License No. _____
Name and Title of Officer		(If a corporation organized in a state other than
_____		Missouri, attach Certificate of Authority to do
Signature of officer		business in the State of Missouri.)
_____		_____
		Federal Tax I.D. Number
_____		(ATTEST)
Address for Communications		_____
_____		_____
Telephone Number	(SE	AL) Secretary

(Each bidder must complete the Bid Form by signing in the proper signature line above and by supplying the required information called for in connection with the signature. The information called for is necessary in the proper preparation of the contract and performance bond.)

SUBCONTRACTOR LISTING

1. For portions of Work equaling or exceeding 1% of the total proposed Contract Sum, the undersigned proposes to use the following subcontractors. Except as otherwise approved by the Owner, the undersigned proposes to perform all other portions of the Work with his own forces.

2.	Portion of the Work:	Subcontractor name and address:
—	_____	_____

—	_____	_____

—	_____	_____

IF	USE ADDITIONAL SHEETS REQUIRED	BIDDER: _____
PROV I	SIDE SIGNATURE IDENTICAL TO THAT SHOWN ON THE BID FORM	by _____

CONTRACT CONSIDERATIONS

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Schedule of values.
- B. Application for payment.
- C. Change procedures.
- D. Alternatives.

1.2 RELATED SECTIONS

- A. Section 01600 - Material and Equipment: Product substitutions.

1.3 SCHEDULE OF VALUES

- A. Submit a printed schedule on Contractor's standard form. Electronic media printout will be considered.
- B. Submit Schedule of Values in duplicate within 20 days after date of Owner-Contractor Agreement.
- C. Revise schedule to list approved Change Orders, with each Application for Payment.

1.4 APPLICATIONS FOR PAYMENT

- A. Submit four copies of each application on Contractor's electronic media driven form.
- B. Content and Format: Utilize Schedule of Values for listing items in Application for Payment.
- C. Payment Period: 30 days.
- D. Submit waiver of liens from vendors.
- E. Include an updated construction progress schedule.
- F. Certified payroll records.

1.5 CHANGE PROCEDURES

- A. The Architect/Engineer may issue a Notice of Change that includes a detailed description of a proposed change with supplementary or revised Drawings and specifications, a change in Contract Time for executing the change with a stipulation of any overtime work required.
- B. The Contractor may propose changes by submitting a request for change to the Architect/Engineer, describing the proposed change and its full effect on the Work. Include a statement describing the reason for the change, the effect on the Contract Sum/Price and Contract Time, and a statement describing the effect on Work by the MoDOT District or other Contractors.
- C. Stipulated Sum/Price Change Order: Based on Notice of Change and Contractor's fixed price quotation or Contractor's request for a Change Order as approved by Architect/Engineer.
- D. Construction Change Directive: Architect/Engineer may issue a directive instructing the Contractor to proceed with a change in the Work, for subsequent inclusion in a Change Order. Document will describe changes in the Work, and designate method of determining any change in Contract Sum/Price or Contract Time. Promptly execute the change.
- E. Time and Material Change Order: Submit itemized account and supporting data after completion of change, within time limits indicated in the Conditions of the Contract. Architect/Engineer will determine the change allowable in Contract Sum/Price and Contract Time as provided in the Contract Documents.

- F. Maintain detailed records of work done on Time and Material basis. Provide full information required for evaluation of proposed changes, and to substantiate costs for changes in the Work.
- G. Execution of Change Orders: Architect/Engineer will issue Change Orders for signatures of parties as provided in the Conditions of the Contract.

1.6 DEFECT ASSESSMENT

- A. Replace the Work, or portions of the Work, not conforming to specify requirements.
- B. If, in the opinion of the Architect/Engineer, it is not practical to remove and replace the Work, the Architect/Engineer will direct an appropriate remedy or adjust payment.

1.7 ALTER NATIVES

- A. Accepted Alternatives will be identified in Owner-Contractor Agreement.

END OF SECTION

COORDINATION AND MEETINGS

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Coordination and project conditions.
- B. Field engineering.
- C. Preconstruction meeting.
- D. Site mobilization meeting.
- E. Progress meetings.
- F. Preinstallation meetings.
- G. Equipment electrical characteristics and components.
- H. Examination.
- I. Preparation.
- J. Cutting and Patching.
- K. Alteration project procedures.

1.2 COORDINATION AND PROJECT CONDITIONS

- A. Coordinate scheduling, submittals, and Work of the various sections of the Project Manual to ensure efficient and orderly sequence of installation of interdependent construction elements.
- B. Verify utility requirements and characteristics of operating equipment are compatible with building utilities. Coordinate work of various sections having interdependent responsibilities for installing, connecting to and placing in service, such equipment.
- C. Coordinate space requirements, supports, and installation of mechanical and electrical Work, which are indicated diagrammatically on Drawings. Follow routing shown for pipes, ducts, and conduit, as closely as practicable; place runs parallel with lines of building. Utilize spaces efficiently to maximize accessibility for other installations, for maintenance, and for repairs.
- D. In finished areas, except as otherwise indicated, conceal pipes, ducts and wiring within the construction. Coordinate locations of fixtures and outlets with finish elements.
- E. Coordinate completion and clean up of Work of separate sections in preparation for Substantial Completion.
- F. After Owner occupancy of premises, coordinate access to site for correction of defective Work and Work not in accordance with Contract Documents, to minimize disruption of Owner's activities.

1.3 FIELD ENGINEERING

- A. Employ a Land Surveyor registered in the State of Missouri and acceptable to Architect/Engineer.
- B. Owner will locate and protect survey control and reference points.
- C. Control datum for survey is that established by Owner provided survey.
- D. Verify setbacks and easements; confirm drawing dimensions and elevations.
- E. Provide field engineering services. Establish elevations, lines and levels, utilizing recognized engineering survey practices.

1.4 PRECONSTRUCTION MEETING

- A. Architect/Engineer will schedule a meeting after Notice of Award.
- B. Attendance Required: District engineer or representative, Architect/Engineer and Contractor.

- C. Record minutes and distribute copies within 5 days after meeting to participants, with two copies to District Engineer, Architect/Engineer, participants and those affected by decisions made.

1.5 SITE MOBILIZATION MEETING

- A. Architect/Engineer will schedule a meeting at the Project site prior to Contractor occupancy.
- B. Architect/Engineer will record minutes and distributes copies within 5 days after meeting to participants, with two copies to Architect/Engineer, participants and those affected by decisions made.

1.6 PROGRESS MEETINGS

- A. Schedule and administer meetings throughout progress of the Work at when arranged by architect/engineer.
- B. Architect/Engineer will make arrangements for meetings, prepare agenda with copies for participants, and preside at meetings.
- C. Attendance Required: Job superintendent, major Subcontractors and suppliers, District engineer representative, Architect/Engineer, as appropriate to agenda topics for each meeting.

D. Agenda:

1. Review of Work progress.
2. Field observations, problems, and decisions.
3. Identification of problems, which impede planned progress.
4. Maintenance of progress schedule.
5. Corrective measures to regain projected schedules.
6. Coordination of projected progress.
7. Effect of proposed changes on progress schedule and coordination.

- E. Record minutes and distributes copies within 5 days after meeting to participants and those affected by decisions made.

1.7 PREINSTALLATION MEETING

- A. When required in individual specification sections, convene a pre-installation meeting at the site prior to commencing work of the section.
- B. Notify Architect/Engineer seven days in advance of meeting date.
- C. Prepare agenda and preside at meeting:
 1. Review conditions of installation, preparation and installation procedures.
 2. Review coordination with related work.
- D. Record minutes and distributes copies within 5 days after meeting to participants and those affected by decisions made.

PART 2 PRODUCTS

Not used

PART 3 EXECUTION

3.1 CUTTING AND PATCHING

- A. Employ skilled and experienced installer to perform cutting and patching.
- B. Submit written request in advance of cutting or altering elements, which affect:

1. Structural integrity of element.
 2. Integrity of weather-exposed or moisture-resistant elements.
 3. Work of Owner or separate contractor.
- C. Execute cutting, fitting, and patching to complete Work, and to:
1. Uncover Work to install or correct ill-timed Work.
 2. Remove and replace defective and non-conforming Work.
 3. Provide openings in elements of Work for penetrations of mechanical and electrical Work.
- D. Cut masonry and concrete materials using masonry saw or core drill.
- E. Fit Work tight to pipes, sleeves, ducts, conduit and other penetrations through surfaces.
- F. Maintain integrity of wall, ceiling, or floor construction; completely seal voids.
- G. Refinish surfaces to match adjacent finishes. For continuous surfaces, refinish to nearest intersection; for an assembly, refinish entire unit.
- H. Identify hazardous substances or conditions exposed during the Work to the Architect/Engineer for decision or remedy.

3.2 ALTER ATION PROJECT PROCEDURES

- A. Materials: As specified in Product sections; match existing Products and work for patching and extending work.
- B. Close openings in exterior surfaces to protect existing work from weather and extremes of temperature and humidity.
- C. When finished surfaces are cut so that a smooth transition with new Work is not possible, terminate existing surface along a straight line at a natural line of division and submit recommendation to Architect/Engineer for review.
- D. Patch or replace portions of existing surfaces that are damaged, lifted, discolored or showing other imperfections.
- E. Finish surfaces as specified in individual Product sections.

END OF SECTION

01300

SUBMITTALS

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Submittal procedures.
- B. Construction progress schedules.
- C. Proposed Products list.
- D. Product Data.
- E. Shop Drawings.
- F. Samples.
- G. Design data.
- H. Test reports.
- I. Certificates.
- J. Manufacturer's instructions.
- K. Manufacturer's field reports.
- L. Erection drawings.
- M. Construction photographs.

1.2 RELATED SECTIONS

- A. Section 01300 - Submittals
- B. Section 01400 - Quality Control: Manufacturers' field services and reports.
- C. Section 01700 - Contract Closeout: Contract warranties, bonds, manufacturers' certificates and closeout submittals.

1.3 REFERENCES

- A. AGC Associated General Contractors of America publication "The Use of CPM in Construction - A Manual for General Contractors and the Construction Industry".

1.4 SUBMITTAL PROCEDURES

- A. Transmit each submittal with Architect/Engineer accepted form.
- B. Identify Project, Contractor, Subcontractor or supplier; pertinent drawing and detail number and specification section number, as appropriate.
- C. Apply Contractor's stamp, signed or initialed certifying that review, approval, verification of Products required, field dimensions, adjacent construction Work and coordination of information is in accordance with the requirements of the Work and Contract Documents.
- D. Schedule submittals to expedite the Project, and deliver to Architect/Engineer at business address. Coordinate submission of related items.
- E. For each submittal for review, allow 15 days excluding delivery time to and from the contractor.
- F. Identify variations from Contract Documents and Product or system limitations, which may be detrimental to successful performance of the completed Work.
- G. Submittals not requested will not be recognized or processed.

1.5 CONSTRUCTION PROGRESS SCHEDULES

- A. Submit initial schedule in duplicate within 15 days after date established in Notice to Proceed.
- B. Revise and resubmit as required.
- C. Submit revised schedules with each Application for Payment, identifying changes since previous version.
- D. Submit a horizontal bar chart with separate line for each major portion of Work or operation, identifying first workday of each week.

1.6 PROPOSED PRODUCTS LIST

- A. Within 15 days after date of Notice to Proceed, submit list of major products proposed for use, with name of manufacturer, trade name and model number of each product.
- B. For products specified only by reference standards, give manufacturer, trade name, model or catalog designation and reference standards.

1.7 PRODUCT DATA

- A. Product Data For Review:
 - 1. Submitted to Architect/Engineer for review for the limited purpose of checking for conformance with information given and the design concept expressed in the contract documents.
 - 2. After review, provide copies and distribute in accordance with SUBMITTAL PROCEDURES article above and for record documents purposes described in Section 01700 - CONTRACT CLOSEOUT.
- B. Product Data for Information:
 - 1. Submitted for the Architect/Engineer's knowledge as contract administrator or for the Owner.
- C. Product Data for Project Closeout:
 - 1. Submitted for the Owner's benefit during and after project completion.
- D. Submit the number of copies, which the Contractor requires, plus two copies that will be retained by the Architect/Engineer.
- E. Mark each copy to identify applicable products, models, options and other data. Supplement manufacturers' standard data to provide information specific to this Project.
- F. After review distribute in accordance with the Submittal Procedures article above and provide copies for record documents described in Section 01700 - CONTRACT CLOSEOUT.

1.8 SHOP DRAWINGS

- A. Shop Drawings for Review:
 - 1. Submitted to Architect/Engineer for review for the limited purpose of checking for conformance with information given and the design concept expressed in the contract documents.
 - 2. After review, produce copies and distribute in accordance with SUBMITTAL PROCEDURES article above and for record documents purposes described in Section 01700 - CONTRACT CLOSEOUT.
- B. Shop Drawings for Information:
 - 1. Submitted for the Architect/Engineer's knowledge as contract administrator or for the Owner.

- C. Shop Drawings for Project Closeout:
 1. Submitted for the Owner's benefit during and after project completion.
- D. Indicate special utility and electrical characteristics, utility connection requirements and location of utility outlets for service for functional equipment and appliances.
- E. Submit in the form of one reproducible transparency and one opaque reproduction.

1.9 SAMPLES

- A. Samples for Review:
 1. Submitted to Architect/Engineer for review for the limited purpose of checking for conformance with information given and the design concept expressed in the contract documents.
 2. After review, produce duplicates and distribute in accordance with SUBMITTAL PROCEDURES article above and for record documents purposes described in Section 01700 - CONTRACT CLOSEOUT.
- B. Samples for Information:
 1. Submitted for the Architect/Engineer's knowledge as contract administrator or for the Owner.
- C. Samples for Selection:
 1. Submitted to Architect/Engineer for aesthetic, color, or finish selection.
 2. Submit samples of finishes for Architect/Engineer selection.
 3. After review, produce duplicates and distribute in accordance with SUBMITTAL PROCEDURES article above and for record documents purposes described in Section 01700 - CONTRACT CLOSEOUT.

1.10 DESIGN DATA

- A. Submit for the Architect/Engineer's knowledge as contract administrator or for the Owner.
- B. Submit for information for the limited purpose of assessing conformance with information given and the design concept expressed in the contract documents.

1.11 TEST REPORTS

- A. Submit for the Architect/Engineer's knowledge as contract administrator or for the Owner.
- B. Submit test reports for information for the limited purpose of assessing conformance with information given and the design concept expressed in the contract documents.

1.12 CERTIFICATES

- A. When specified in individual specification sections, submit certification by the manufacturer, installation/application subcontractor, or the Contractor to Architect/Engineer, in quantities specified for Product Data.
- B. Indicate material or Product conforms to or exceeds specified requirements. Submit supporting reference data, affidavits and certifications as appropriate.
- C. Certificates may be recent or previous test results on material or Product but must be acceptable to Architect/Engineer.

1.13 MANUFACTURER'S INSTRUCTIONS

- A. When specified in individual specification sections, submit printed instructions for delivery, storage, assembly, installation, and start-up, adjusting and finishing, to Architect/Engineer for delivery to owner in quantities specified for Product Data.

- B. Indicate special procedures, perimeter conditions requiring special attention and special environmental criteria required for application or installation.
- C. Refer to Section 01400 - Quality Control, Manufacturers' Field Services article.

1.14 M ANUFACTURER'S FIELD REPORTS

- A. Submit reports for the Architect/Engineer's benefit as contract administrator or for the Owner.
- B. Submit for information for the limited purpose of assessing conformance with information given and the design concept expressed in the contract documents.

1.15 ERECTION DRAWINGS

- A. Submit drawings for the Architect/Engineer's benefit as contract administrator or for the Owner.
- B. Submit for information for the limited purpose of assessing conformance with information given and the design concept expressed in the contract documents.
- C. Data indicating inappropriate or unacceptable Work may be subject to action by the Architect/Engineer or Owner.

END OF SECTION

01400

QUALITY CONTROL

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Quality assurance - control of installation.
- B. Tolerances
- C. References and standards.
- D. Mock-up.
- E. Inspecting and testing laboratory services.
- F. Manufacturers' field services.

1.2 RELATED SECTIONS

- A. Section 01300 - Submittals: Submission of manufacturers' instructions and certificates.
- B. Section 01600 - Material and Equipment: Requirements for material and product quality.
- C. Section 01650 - Starting of Systems.

1.3 QUALITY ASSURANCE - CONTROL OF INSTALLATION

- A. Monitor quality control over suppliers, manufacturers, Products, services, site conditions and workmanship, to produce Work of specified quality.
- B. Comply with manufacturers' instructions, including each step in sequence.
- C. Should manufacturers' instructions conflict with Contract Documents, request clarification from Architect/Engineer before proceeding.
- D. Comply with specified standards as minimum quality for the Work except where more stringent tolerances, codes or specified requirements indicate higher standards or more precise workmanship.
- E. Perform Work by persons qualified to produce required and specified quality.
- F. Verify that field measurements are as indicated on shop drawings or as instructed by the manufacturer.
- G. Secure Products in place with positive anchorage devices designed and sized to withstand stresses, vibration, physical distortion, or disfigurement.

1.4 TOLERANCES

- A. Monitor fabrication and installation tolerance control of Products to produce acceptable Work. Do not permit tolerances to accumulate.
- B. Comply with manufacturers' tolerances. Should manufacturers' tolerances conflict with Contract Documents, request clarification from Architect/Engineer before proceeding.
- C. Adjust Products to appropriate dimensions; position before securing Products in place.

1.5 REFERENCES AND STANDARDS

- A. For Products or workmanship specified by association, trade or other consensus standards, comply with requirements of the standard, except when more rigid requirements are specified or are required by applicable codes.

- B. Conform to reference standard by date of issue current on date for receiving bids or date specified in the individual specification sections, except where a specific date is established by code.
- C. Neither the contractual relationships, duties or responsibilities of the parties in Contract nor those of the Architect/Engineer shall be altered from the Contract Documents by mention or inference otherwise in any reference document.

1.6 TESTING SERVICES

- A. Contractor to provide all testing services as called out in these specifications.
- B. Testing and source quality control may occur on or off the project site. Perform off-site testing as required by the Architect/Engineer or the Owner.
- C. Testing does not relieve Contractor to perform Work to contract requirements.
- D. Re-testing required because of non-conformance to specified requirements shall be performed by the same MoDOT personnel on instructions by the Architect/Engineer.

1.7 INSPECTION SERVICES

- A. Owner will employ MoDOT Personnel to perform inspection.
- B. Inspecting may occur on or off the project site. Perform off-site inspecting as required by the Architect/Engineer or the Owner.
- C. Inspecting does not relieve Contractor to perform Work to contract requirements.

1.8 MANUFACTURERS' FIELD SERVICES

- A. When specified in individual specification sections, require material or Product suppliers or manufacturers to provide qualified staff personnel to observe site conditions, conditions of surfaces and installation, quality of workmanship, start-up of equipment, test, adjust and the balancing of equipment as applicable and to initiate instructions when necessary.
- B. Report observations and site decisions or instructions given to applicators or installers that are supplemental or contrary to manufacturers' written instructions.
- C. Refer to Section 01300 - SUBMITTALS, MANUFACTURERS' FIELD REPORTS article.

PART 2 EXECUTION

2.1 EXAMINATION

- A. Verify that existing site conditions and substrate surfaces are acceptable for subsequent Work. Beginning new Work means acceptance of existing conditions.
- B. Verify that existing substrate is capable of structural support or attachment of new Work being applied or attached.

2.2 PREPARATION

- A. Clean substrate surfaces prior to applying next material or substance.
- B. Seal cracks or openings of substrate prior to applying next material or substance.
- C. Apply manufacturer required or recommended substrate primer, sealer or conditioner prior to applying any new material or substance in contact or bond.

END OF SECTION

CONSTRUCTION FACILITIES AND TEMPORARY CONTROLS

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Temporary Utilities: Electricity, telephone service, facsimile service and sanitary facilities.
- B. Temporary Controls: enclosures and fencing, protection of the Work and water control.
- C. Construction Facilities: progress cleaning and temporary buildings.

~~1.2 TEMPORARY ELECTRICITY~~

- ~~A. Cost: By Contractor; pay for temporary power service furnished by MoDOT.~~

~~1.3 TELEPHONE SERVICE~~

- ~~A. Provide, maintain, and pay for telephone service to field office and Architect/Engineer's field office at time of project mobilization.~~

~~1.4 FACSIMILE SERVICE~~

- ~~A. Provide, maintain and pay for facsimile service and a dedicated telephone line to field office and Architect/Engineer's field office at time of project mobilization.~~

~~1.5 TEMPORARY WATER SERVICE~~

- ~~A. Connect to existing water source as directed for construction operations at time of project mobilization.~~
- ~~B. Contractor will reimburse Owner for water used in construction as agreed upon at time of project mobilization.~~

~~1.6 TEMPORARY SANITARY FACILITIES~~

- ~~A. Provide and maintain required facilities and enclosures. Provide at time of project mobilization.~~

~~1.7 FENCING~~

- ~~A. Construction: Use plastic mesh safety fencing or better.~~
- ~~B. Provide 48" high fence around construction site; equip with vehicular and pedestrian gates with locks.~~

~~1.8 WATER CONTROL~~

- ~~A. Grade site to drain. Maintain excavations free of water. Provide, operate and maintain pumping equipment.~~
- ~~B. Protect site from puddling or running water. Provide water barriers as required to protect site from soil erosion.~~

~~1.9 EXTERIOR ENCLOSURES~~

- ~~A. Provide temporary weather tight closure of exterior openings to accommodate acceptable working conditions and protection for Products, to allow for temporary heating and maintenance of required ambient temperatures identified in individual specification sections, and to prevent entry of unauthorized persons. Provide access doors with self closing hardware and locks.~~

1.10 PROTECTION OF INSTALLED WORK

- A. Protect installed Work and provide special protection where specified in individual specification sections.
- B. Provide temporary and removable protection for installed Products. Control activity in immediate work area to prevent damage.
- C. Provide protective coverings at walls, projections, jambs, sills and soffits of openings.
- D. Protect finished floors, stairs, and other surfaces from traffic, dirt, wear, damage or movement of heavy objects, by protecting with durable sheet materials.
- E. Prohibit traffic or storage upon waterproofed or roofed surfaces. If traffic or activity is necessary, obtain recommendations for protection from waterproofing or roofing material manufacturer.
- F. Prohibit traffic from landscaped areas.

1.11 SECURITY

- A. Provide security and facilities to protect Work and existing facilities and Owner's operations from unauthorized entry, vandalism or theft.
- B. Coordinate with Owner's security program.

~~1.12 ACCESS ROADS~~

- ~~A. Provide and maintain access to fire hydrants, free of obstructions.~~
- ~~B. Provide means of removing mud from vehicle wheels before entering streets.~~
- ~~C. Designated existing on-site roads may be used for construction traffic.~~

1.13 PROGRESS CLEANING AND WASTE REMOVAL

- A. Maintain areas free of waste materials, debris and rubbish. Maintain site in a clean and orderly condition.
- B. Remove debris and rubbish from pipe chases, plenums, attics, crawl spaces and other closed or remote spaces, prior to enclosing the space.
- C. Broom and vacuum clean interior areas prior to start of surface finishing and continue cleaning to eliminate dust.
- D. Collect and remove waste materials, debris and rubbish from site periodically and dispose off-site.
- E. Open free-fall chutes are not permitted. Terminate closed chutes into appropriate containers with lids.

~~1.14 FIELD OFFICES AND SHEDS~~

- ~~A. Office: Weather tight, with lighting, electrical outlets, heating and ventilating equipment and equipped with drawing rack and drawing display table.~~
- ~~B. Provide space for Project meetings, with table and chairs to accommodate 6 persons.~~

~~1.15 REMOVAL OF UTILITIES, FACILITIES, AND CONTROLS~~

- ~~A. Remove temporary utilities, equipment, facilities and materials prior to Final Application for Payment inspection.~~
- ~~B. Clean and repair damage caused by installation or use of temporary work.~~
- ~~C. Restore existing facilities used during construction to original condition. Restore permanent facilities used during construction to specified condition.~~

PART 2 PRODUCTS

Not Used.

PART 3 EXECUTION

Not Used.

END OF SECTION

01600

MATERIAL AND EQUIPMENT

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Products.
- B. Transportation and handling.
- C. Storage and protection.
- D. Product options.
- E. Substitutions.

1.2 RELATED SECTIONS

- A. Instructions to Bidders: Product options and substitution procedures.
- B. Section 01400 - Quality Control: Product quality monitoring.

1.3 PRODUCTIONS

- A. Do not use materials and equipment removed from existing premises, except as specifically permitted by the Contract Documents.
- B. Provide interchangeable components of the same manufacture for components being replaced.

1.4 TRANSPORTATION AND HANDLING

- A. Transport and handle Products in accordance with manufacturer's instructions.
- B. Promptly inspect shipments to ensure that Products comply with requirements, quantities are correct and products are undamaged.
- C. Provide equipment and personnel to handle Products by methods to prevent soiling, disfigurement or damage.

1.5 STORAGE AND PROTECTION

- A. Store and protect Products in accordance with manufacturers' instructions.
- B. Store with seals and labels intact and legible.
- C. Store sensitive Products in weather tight, climate controlled, enclosures in an environment favorable to Product.
- D. For exterior storage of fabricated Products, place on sloped supports above ground.
- E. Provide bonded off-site storage and protection when site does not permit on-site storage or protection.
- F. Cover Products subject to deterioration with impervious sheet covering. Provide ventilation to prevent condensation and degradation of Products.
- G. Store loose granular materials on solid flat surfaces in a well-drained area. Prevent mixing with foreign matter.
- H. Provide equipment and personnel to store Products by methods to prevent soiling, disfigurement or damage.

- I. Arrange storage of Products to permit access for inspection. Periodically inspect to verify Products are undamaged and are maintained in acceptable condition.

1.6 PROD UCT OPTIONS

- A. Products Specified by Reference Standards or by Description Only: Any Product meeting those standards or description is acceptable.
- B. Products Specified by Naming One or More Manufacturers: Products of manufacturers named and meeting specifications, no options or substitutions allowed.
- C. Products Specified by Naming One or More Manufacturers with a Provision for Substitutions: Submit a request for substitution for any manufacturer not named in accordance with the following article.

1.7 S UBSTITUTIONS

- A. Architect/Engineer will consider requests for Substitutions only within 15 days after date established in Notice to Proceed.
 - B. Substitutions may be considered when a Product becomes unavailable through no fault of the Contractor.
 - C. Document each request with complete data substantiating compliance of proposed Substitution with Contract Documents.
 - D. A request constitutes a representation that the Contractor:
 - 1. Has investigated proposed Product and determined that it meets or exceeds the quality level of the specified Product.
 - 2. Will provide the same warranty for the Substitution as for the specified Product.
 - 3. Will coordinate installation and make changes to other Work that may be required for the Work to be complete with no additional cost to Owner.
 - 4. Waives claims for additional costs or time extension that may subsequently become apparent.
 - 5. Will reimburse Owner for review or redesign services associated with re-approval by authorities.
 - E. Substitutions will not be considered when they are indicated or implied on shop drawing or product data submittals, without separate written request or when acceptance will require revision to the Contract Documents.
 - F. Substitution Submittal Procedure:
 - 1. Submit three copies of request for Substitution for consideration. Limit each request to one proposed Substitution.
 - 2. Submit shop drawings, product data and certified test results attesting to the proposed Product equivalence. Burden of proof is on proposer.
- 3 . The Architect/Engineer will notify Contractor in writing of decision to accept or reject request.

PART 2 PRODUCTS

Not Used.
PART 3 EXECUTION

Not Used.

END OF SECTION

01650

STARTING OF SYSTEMS

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Starting systems.
- B. Demonstration and instructions.
- C. Testing, adjusting and balancing.

1.2 RELATED SECTIONS

- A. Section 01400 - Quality Control: Manufacturers field reports.
- B. Section 01700 - Contract Closeout: System operation and maintenance data and extra materials.

1.3 STARTING SYSTEMS

- A. Coordinate schedule for start-up of various equipment and systems.
- B. Notify Architect/Engineer seven days prior to start-up of each item.
- C. Verify that each piece of equipment or system has been checked for proper lubrication, drive rotation, belt tension, and control sequence and for conditions that may cause damage.
- D. Verify tests, meter readings, and specified electrical characteristics agree with those required by the equipment or system manufacturer.
- E. Verify that wiring and support components for equipment are complete and tested.
- F. Execute start-up under supervision of applicable manufacturer's representative or Contractors' personnel in accordance with manufacturers' instructions.
- G. When specified in individual specification Sections, require manufacturer to provide authorized representative to be present at site to inspect, check and approve equipment or system installation prior to start-up and to supervise placing equipment or system in operation.
- H. Submit a written report in accordance with Section 01300 that equipment or system has been properly installed and is functioning correctly.

1.4 DEMONSTRATION AND INSTRUCTIONS

- A. Demonstrate operation and maintenance of Products to Owner's personnel two weeks prior to date of Final Completion.
- B. For equipment or systems requiring seasonal operation, perform demonstration for other season within six months.
- C. Utilize operation and maintenance manuals as basis for instruction. Review contents of manual with Owners' personnel in detail to explain all aspects of operation and maintenance.
- D. Demonstrate start-up, operation, control, adjustment, trouble-shooting, servicing, maintenance and shutdown of each item of equipment at agreed time, at equipment location.

- E. Prepare and insert additional data in operations and maintenance manuals when the need for additional data becomes apparent during instruction.
- F. The amount of time required for instruction on each item of equipment and system that's specified in individual sections.

PART 2 PRODUCTS

Not Used.

PART 3 EXECUTION

Not Used.

END OF SECTION

CONTRACT CLOSEOUT

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Closeout procedures.
- B. Final cleaning.
- C. Adjusting.
- D. Project record documents.
- E. Operation and maintenance data.
- F. Spare parts and maintenance Products.
- G. Warranties.

1.2 RELATE TO OTHER SECTIONS

- A. Section 01500 - Construction Facilities and Temporary Controls: Progress cleaning.
- B. Section 01650 - Starting of Systems: System start-up, testing, adjusting and balancing.

1.3 CLOSEOUT PROCEDURES

- A. Submit written certification that Contract Documents have been reviewed, Work has been inspected, and that Work is complete in accordance with Contract Documents and ready for Architect/Engineer's review.
- B. Provide submittals to Owner that is required by governing or other authorities.
- C. Submit final Application for Payment identifying total adjusted Contract Sum, previous payments and sum remaining due.
- D. Owner will occupy portions of the building as specified in Section 01010.

1.4 FINAL CLEANING

- A. Execute final cleaning prior to final project assessment. Clean interior and exterior glass, surfaces exposed to view; remove temporary labels, stains and foreign substances, polish transparent and glossy surfaces, vacuum carpeted and soft surfaces.
- B. Clean equipment and fixtures to a sanitary condition with cleaning materials appropriate to the surface and material being cleaned.
- C. Clean or replace filters of operating equipment used during construction and/or adjustment.
- D. Clean debris from roofs, gutters, downspouts and drainage systems.
- E. Clean site; sweep paved areas, rake clean landscaped surfaces.
- F. Remove waste and surplus materials, rubbish and construction facilities from the site.

1.5 ADJUSTING

- A. Adjust operating Products and equipment to ensure smooth and unhindered operation.

1.6 PROJECT RECORD DOCUMENTS

- A. Store record documents separate from documents used for construction.

- B. Record information concurrent with construction progress.
- C. Specifications: Legibly mark and record at each Product section description of actual Products installed, including the following:
 - 1. Manufacturer's name and product model and number.
 - 2. Product substitutions or alternates utilized.
 - 3. Changes made by Addenda and modifications.
- D. Record Drawings and Shop Drawings: Legibly mark each item to record actual construction including:
 - 1. Measured depths of foundations in relation to finish main floor datum.
 - 2. Measured horizontal and vertical locations of underground utilities and appurtenances, referenced to permanent surface improvements.
 - 3. Measured locations of internal utilities and appurtenances concealed in construction, referenced to visible and accessible features of the Work.
 - 4. Field changes of dimension and detail.
 - 5. Details not on original Contract drawings.
- E. Submit documents to Architect/Engineer with claim for final Application for Payment.

1.7 OPERATION AND MAINTENANCE DATA

- A. Submit data bound in 8-1/2 x 11 inch (A4) text pages, three D side ring binders with durable plastic covers.
- B. Prepare binder cover with printed title "OPERATION AND MAINTENANCE INSTRUCTIONS", title of project and subject matter of binder when multiple binders are required.
- C. Internally subdivide the binder contents with permanent page dividers, logically organized; with tab titling clearly printed under reinforced laminated plastic tabs.
- D. Submit 1 draft copy of completed volumes 15 days prior to final inspection. This copy will be reviewed and returned with Architect/Engineer comments. Revise content of all document sets as required prior to final submission.
- E. Submit two sets of revised final volumes, within 10 days after final inspection.

1.8 SPARE PARTS AND MAINTENANCE PRODUCTS

- A. Provide spare parts, maintenance, and extra Products in quantities specified individual specification sections.
- B. Deliver to Project site; obtain receipt prior to final payment.
- C. Examine system components at a frequency consistent with reliable operation. Clean, adjust and lubricate as required.
- D. Include systematic examination, adjustment, and lubrication of components. Repair or replace parts whenever required. Use parts produced by the manufacturer of the original component.
- E. Maintenance service shall not be assigned or transferred to any agent or Subcontractor without prior written consent of the Owner.

1.9 WARRANTIES

- A. Execute and assemble transferable warranty documents from Subcontractors, suppliers and manufacturers.
- B. Submit prior to final Application for Payment.
- C. For items of Work delayed beyond date of Final Completion, provide updated submittal within 10 days after acceptance, listing date of acceptance as start of the warranty period.

PART 2 PRODUCTS

Not Used.

PART 3 EXECUTION

Not Used.

END OF SECTION

FRAMING AND SHEATHING**PART 1 GENERAL**

1.1 SECTION INCLUDES

- A. Wall framing for insulation board. See Drawings..
- B. Treated wood 2x sill with anchors at wall and where indicated on the Drawings.
- C. Sheathing.

1.2 REFERENCES

- A. AHA (American Hardboard Association) A135.4 - Basic Hardboard.
- B. ALSC (American Lumber Standards Committee) - Softwood Lumber Standards.
- C. ANSI A208.1 - Mat-Formed Wood Particleboard.
- D. APA (American Plywood Association).
- E. NFPA (National Forest Products Association).
- F. SPIB (Southern Pine Inspection Bureau).
- G. WCLIB (West Coast Lumber Inspection Bureau).
- H. WWPA (Western Wood Products Association).

1.3 DELIVERY, STORAGE AND PROTECTION

- A. Section 01600 - Material and Equipment: Transport, handle, store and protect products.
- B. Protect trusses from warping or other distortion by stacking in vertical position, braced to resist movement.

PART 2 PRODUCTS

2.1 SHEATHING MATERIALS

- A. ½" C/D Exterior Plywood Wall Sheathing, 48 x 96 inch sized sheets, square edges.
- B. #2 - 2 x 6 wood studs at wall at old garage door opening(s). MoDOT will finish wall on the interior.

2.2 ACCESSORIES

- A. Fasteners and Anchors:
 - 1. Fasteners: Hot dipped galvanized steel for high humidity and treated wood locations, unfinished steel elsewhere.
- B. Sill Flashing (Under Sill Gasket): Galvanized steel.
- C. Termite Shield: Galvanized sheet steel.

PART 3 EXECUTION

3.1 FRAMING

- A. Set structural members level and plumb, in correct position.
- B. Make provisions for erection loads and for sufficient temporary bracing to maintain structure safe, plumb and in true alignment until completion of erection and installation of permanent bracing.

C. Place horizontal members, crown side up.

3.2 TOLERANCES

A. Framing Members: 1/4 inch from true position, maximum.

END OF SECTION

BUILDING INSULATION

PART 1 GENERAL

1.1 SUMMARY

- A. Provide building insulation where shown on the Drawings, as specified herein and as needed for a complete and proper installation.
- B. Related work:
 - 1. Documents affecting work of this Section include but are not necessarily limited to, General Conditions, Supplementary Conditions and Sections in Division 1 of these Specifications.

1.2 QUALITY ASSURANCE

- A. Use adequate numbers of skilled workmen who are thoroughly trained and experienced in the necessary crafts and who are completely familiar with the specified requirements and the methods needed for proper performance of the work of this Section.
- B. Upon completion of this portion of the Work, complete and post a certificate of insulation compliance in accordance with pertinent requirements of governmental agencies having jurisdiction.

1.3 DELIVERY, STORAGE AND HANDLING

- A. Comply with pertinent provisions of Section 01620.

PART 2 PRODUCTS

2.1 MATERIALS

- A. Provide the following building insulation where shown on the Drawings or otherwise needed to achieve the degree of insulation required under pertinent regulations of governmental agencies having jurisdiction.
 - 1. Exterior Wall Insulation - R-19 fiberglass batt insulation installed between the 2 x 6 wood studs. Equal to Owens-Corning Fiberglass Corporation, Toledo, Ohio 43659. Provide full height 6 mil. vapor barrier fabric at old garage door opening(s).

2.2 OTHER MATERIALS

- A. Provide 6 mil. vapor barrier where specified on drawings.
- B. Provide other materials, not specifically described but required for a complete and proper installation, as selected by the Contractor subject to the approval of the Architect.

PART 3 EXECUTION

3.1 SURFACE CONDITIONS

- A. Examine the areas and conditions under which work of this Section will be performed. Correct conditions detrimental to timely and proper completion of the Work. Do not proceed until unsatisfactory conditions are corrected.
- B. Remove, or protect against, projections in construction framing that may damage or prevent proper insulation.

3.2 INS TALLATION

- A. Install the work of this Section in strict accordance with the original design, requirements of governmental agencies having jurisdiction, and the manufacturer's recommended installation procedures as approved by the Architect, anchoring all components firmly into position.

END OF SECTION

BOARD INSULATION

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Board insulation attached with adhesive to exterior of existing CMU walls on both buildings.

1.2 REFERENCES

- A. ASTM C208 - Insulating Board (Cellulosic Fiber), Structural and Decorative.
- B. ASTM C240 - Testing Cellular Glass Insulating Block.
- C. ASTM C578 - Preformed, Cellular Polystyrene Thermal Insulation.
- D. ASTM C612 - Mineral Fiber Block and Board Thermal Insulation Board.
- E. ASTM C578 - Preformed Cellular Polystyrene Thermal Insulation.
- F. ASTM D2842 - Water Absorption of Rigid Cellular Plastics.
- G. ASTM E96 - Test Methods for Water Vapor Transmission of Materials.

1.3 SYSTEM DESCRIPTION

- A. Materials of This Section: Provide continuity of thermal barrier at building enclosure elements.
- B. Materials of This Section: Provide thermal protection to vapor retarder in conjunction with vapor retarder materials.
- C. Materials of This Section: Provide thermal protection to air seal materials at building enclosure elements in conjunction with air barrier materials.

1.4 ENVIRONMENTAL REQUIREMENTS

- A. Do not install insulation adhesives when temperature or weather conditions are detrimental to successful installation.

1.5 COORDINATION

- A. Coordinate work under provisions of Section 01039.
- B. Coordinate the work with installation of vapor retarder and air seal materials.

1.6 ACCESSORIES

- A. Building wrap: Equal to Tyvek.
- B. Insulation Fasteners: Apply adhesive to adhere to surface to receive board insulation, length to suit insulation thickness and substrate, capable of securely and rigidly fastening insulation in place.

PART 2 PRODUCT

2.1 MATERIALS

- A. Provide the following perimeter insulation where shown on the Drawings or otherwise needed to achieve the degree of insulation required under pertinent regulations of governmental agencies having jurisdiction.
 - 1. 1-1/2" rigid insulation board (blue) that has a minimum R - Value of 7.5.
 - a. Acceptable Products:
 - (1) "Styrofoam" brand, Square Edge as manufactured by Dow Chemical Company, 2020 Willard H. Dow Center, Midland, Michigan 48674, (800) 232-2436.
 - (2) Similar products may be substituted with prior approval from the Architect.

PART 3 EXECUTION

3.1 EXAMINATION

- A. Verify site conditions under provisions of Section 01039.
- B. Verify that substrate, adjacent materials and insulation boards are dry and ready to receive insulation and adhesive.
- C. Verify substrate surface is flat, free of honeycomb, fins, irregularities or materials or substances that may impede adhesive bond.

3.2 INSTALLATION

- A. See Construction Documents.

3.3 PROTECTION OF FINISHED WORK

- A. Protect finished Work under provisions of Section 01500.
- B. Do not permit work to be damaged prior to covering insulation.

END OF SECTION

07410

METAL WALL PANELS

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Prefinished steel sheet, associated flashings.
- B. Counter flashings.
- C. Integral fascias.
- D. Metal wall panels.

1.2 RELATED SECTIONS

- A. Section 06112 - Framing.
- B. Section 07600 – Flashing and Sheet Metal

1.3 REFERENCES

- A. American Society for Testing and Materials (ASTM):
 - 1. ASTM A 653/A 653M – Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy Coated (Galvannealed) by Hot-Dip Process.
 - 2. ASTM A 755/A 755M – Specification for Steel Sheet, Metallic Coated by the Hot-Dip Process and Prepainted by the Coil-Coated Process for Exterior Building Products.

1.4 SYSTEM REQUIREMENTS

- A. Metal Wall Panel Performance Requirements:
 - 1. Wall Panel System Fire Resistance: Class 1.

1.5 SUBMITTALS FOR REVIEW

- A. Section 01300 - Submittals: Procedures for submittals.
- B. Shop Drawings: Indicate material profile, jointing pattern, jointing details, fastening methods, flashings, terminations and installation details.
- C. Product Data: Provide data on metal types, finishes and characteristics.
- D. Submit two samples 12x12 inches in size illustrating metal siding mounted on plywood backing illustrating typical seam, external corner, finish and color.

1.5 QUALITY ASSURANCE

- A. Perform work in accordance with SMACNA Architectural Sheet Metal Manual requirements, except as otherwise noted.
- B. Fabricator and Installer Qualifications: Company specializing in sheet metal roof installations with minimum four years experience.

1.6 PRE-INSTALLATION MEETING

- A. Section 01039 - Coordination and Meetings: Pre-installation meeting.
- B. Convene one week before starting work of this section.

1.7 DELIVERY, STORAGE AND PROTECTION

- A. Section 01600 - Material and Equipment: Transport, handle, store, and protect.
- B. Stack material to prevent twisting, bending or abrasion and to provide ventilation. Slope metal sheets to ensure drainage.
- C. Prevent contact with materials that may cause discoloration or staining.

1.8 WARRANTY

- A. Manufacturer's Warranty: Provide manufacturer's standard (20 year) warranty document executed by authorized company official covering performance and finish, including color, fading, and chalking.

PART 2 PRODUCTS

2.1 MANUFACTURERS

- A. Acceptable Manufacturer: Loomis Metals Inc.; 3485 Swetzer Road, P.O. Box 420, Loomis, CA 95650. ASD. Toll Free (800) 331-7626 or approved equal.

2.2 METAL PANELS

- A. General:
 - 1. Metal Panel Material: Structural quality, hot-dipped galvanized steel sheet in compliance with ASTM A 653, G90 (ASTM A 653M, Z275) coating designation
 - 2. Metal Panel Fabrication: Metal panels shall be factory-fabricated; panels fabricated on site using portable roll former are prohibited.
 - 3. Flashing: Sidewall and end wall flashing; rake trim, and eave trim; and nosing's and formed metal closure pieces shall be fabricated and finished to match panel specified.
- B. Wall Metal Panels: Lap seam panel, with curved, corrugated ribs and exposed fasteners.
 - 1. Coated Metal Thickness: 29 gauge for wall panels.
 - 2. Panel Height: 3/4-inch minimum.
 - 3. Panel Width: 24 inches.
- C. Metal Panel Finish:
 - 1. Prepainted metal, coated in compliance with ASTM A 755 (ASTM A 755M)
 - a. Finish: Fluoropolymer, "Kynar 500".
 - b. Color: As selected by Architect from Manufacturer's standard colors.

2.3 ACCESSORIES

- A. Fasteners: Self-tapping to match panel color with soft neoprene washers.
- B. Underlayment: Tyvek building wrap. See Drawings.
- C. Primer: Zinc molybdate type.
- D. Protective Backing Paint: Zinc molybdate alkyd.
- E. Sealant/Joint Mastic: As required per manufacturer's recommendations for lap joints at wall panels.
- F. Plastic Cement: ASTM D4586, Type I.

PART 3 EXECUTION

3.1 INSTALLATION

- A. Install in accordance with manufacturer's instructions.
- B. Coordinate metal wall panel installation with other work, including but not limited to, wall substrates, flashing and trim, and adjoining work.
- C. Separate dissimilar metals using bituminous coating to prevent galvanic action.

- D. Provide joint sealant as required by manufacturer's recommendations. Form joints to conceal sealant.

3.2 CLEANING

- A. Remove temporary coverings and protection of adjacent work.
- B. Clean metal panels in accordance with metal manufacturer's written instructions.
- C. Remove debris from project site and dispose.

3.3 PROTECTION

- A. Protect installed products until completion of project.
- B. Touch-up, repair, or replace damaged products before Substantial Completion.

END OF SECTION

ALUMINUM SOFFIT PANELS

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Preformed aluminum soffit panels, trim, and accessories for enclosing exterior roof overhangs.

1.2 RELATED SECTIONS

- A. Section 05500 – Metal Fabrications. (N.I.C.)
- B. Section 06112 – Framing and Sheathing.
- C. Section 07240 – Exterior Insulation Finish System. (N.I.C.)
- D. Section 07900 – Joint Sealers.

1.3 REFERENCES

- A. AAMA 1402-86 – Aluminum Siding, Soffit, and Fascia.
- B. ASTM B 209 – Aluminum and Aluminum-Alloy Sheet and Plate.
- C. ASTM D 226 – Asphalt-Saturated Organic Felt Used in Roofing and Waterproofing. (N.I.C)
- D. ASTM E 84 – Surface Burning Characteristics of Building Materials.

1.4 PERFORMANCE REQUIREMENTS

- A. Soffits shall be fabricated and installed to withstand positive and negative wind pressure loads in accordance with applicable codes.
- B. Soffit system to accommodate without damage to components or failure of weather barrier movement caused by seasonal temperature cycling and deflection of structural support framing.
- C. Moisture entering or condensation occurring within soffit system shall drain to exterior.

1.5 SUBMITTALS

- A. Provide in accordance with Section 01300:
 - 1. Product data including material descriptions, dimensions, and profiles.
 - 2. Shop drawings showing layout, location of vents, dimensions, penetrations, trim, and installation methods.
 - 3. 4 inch long minimum samples of soffit panel and trim in color selected.
 - 4. Certificates documenting soffit system complies with requirements specified.
 - 5. Manufacturer’s installation instructions.
 - 6. Copy of warranty for review by Architect.

1.6 QUALITY ASSURANCE

- A. Manufacturer: Company with a minimum 5 years’ successful experience manufacturing aluminum soffit.
- B. Single Source Responsibility: To ensure functional and appearance compatibility, soffit panels and all trim pieces shall be products of single manufacturer.
- C. Aluminum soffit system shall be fabricated and installed to comply with:
 - 1. AAMA 1402-86.
 - 2. International Code Council-ES Legacy – Report No. 97-64.
 - 3. International Conference of Building Officials (ICBO): Report No. 2027.

1.7 PRODUCT HANDLING

- A. Deliver components in manufacturer's protective cartons clearly labeled as to specific products contained.
- B. During delivery and storage keep cartons flat and supported along entire length.
- C. Store material off ground, out of weather, in dry place. Provide ventilation. Protect from falling objects and construction activities.
- D. Handling: Avoid gouging, scratching, and denting.

1.8 WARRANTY

- A. Provide under provisions of section 01780 – Closeout Submittals: Fifty (50) year lifetime limited, non-prorated, transferable warranty.

PART 2 PRODUCTS

2.1 MATERIALS

- A. Fabricate soffit panels and trim from sheet aluminum complying with ASTM B 209, AA3000 Alloy:
- B. Minimum Aluminum Properties:
 - 1. Ultimate Strength: 25 KSI.
 - 2. Yield Strength: 22 KSI.
 - 3. Modulus of Elasticity: 10,000 KSI.
 - 4. Coefficient of Linear Thermal Expansion: 1.31×10^{-5} inch/inch/degree F.
 - 5. Melting Range: 1175 to 1210 degrees F.

2.2 SOFFIT PANELS

- A. Type: Fully vented, hi-tensile, double V-groove soffit panel with installation flanges along both edges.
 - 1. Dimensions: 12 inches exposed width by 144 inches long.
 - 2. Thickness: 0.016 inches.
 - 3. Profile: V-grooves forming three (3) 4-inch wide panels with all panels vented.
 - 4. Net Free Open Area: 11.6 square inches per linear foot.
 - 5. Surface: Smooth.
 - 6. Finish Color: As determined by District Representative.

2.3 TRIM

- A. Provide trim pieces as detailed on manufacturer's installation manual and as required for complete, weathertight, functional installation.
- B. Aluminum Trim: Fabricate from same material as soffit to shape, dimensions, and profile required to accommodate soffit panel and project conditions. Provide with channels to receive panels, flanges for concealed weathertight attachment, and slotted attachment holes. Color shall match or coordinate with soffit color. In order to eliminate or minimize visible joints, form in longest possible lengths with 10 feet being the minimum.
 - 1. J-channel: $\frac{1}{2}$ inch wide channel to receive soffit panels with $\frac{1}{2}$ inch attachment flange.
 - 2. Reverse Frieze Molding: F-shaped piece with $\frac{1}{2}$ inch wide channel to receive aluminum soffit panels.
 - 3. Soffit T-Bar: Double channel to receive two soffit panels with exposed face.

2.4 ACCESSORIES

- A. Fasteners: Weather and corrosion resistant nails of type, size, and spacing as recommended by soffit manufacturer.
 - 1. Plain Shank Nails: Use for wood studs, furring, and other framing with minimum lengths of 1-1/2 inches. Allow 3/4 inch minimum penetration into wood framing.
 - 2. Screw Shank Nails: Use for plywood sheathing.
 - 3. Exposed Nails: Trim nails that match soffit and trim.
- B. Sealants: Silicone type as recommended by soffit manufacturer.

PART 3 EXECUTION

3.1 GENERAL

- A. Prepare substrate and install soffit in accordance with manufacturer's instructions, approved shop drawings, and manufacturer's soffit installation manual.
- B. Coordinate work with provisions and installation of exterior insulation finish system to ensure compatibility and weathertight, neat transition from vertical surface to horizontal soffit panels.

3.2 PREPARATION

- A. Inspection: Verify that soffit support framing is rigid, level, and spacing does not exceed 24 inches. Do not proceed until deficiencies are addressed.

3.3 INSTALLATION

- A. Field Cutting: Accurately measure and cut soffit panels and trim. Use power circular saw with 10-point aluminum cutting blade, duckbill sheet metal snips, or hacksaw as recommended by manufacturer for specific cutting operation.
- B. Trim: Prior to installing soffit panels, locate and anchor perimeter to receive channels.
- C. Soffit Panels:
 - 1. Layout panels as detailed on approved shop drawings. Provide vented panels to provide sufficient ventilation of space above soffit.
 - 2. Insert panel into receiver channel, flex panel, and insert other end into opposing receiver channel. Ensure panels are perpendicular to perimeter and aligned. Fasten panel to supports by nailing through attachment flanges.
 - 3. Overlap, engage, and lock subsequent panels over preceding ones.
 - 4. At corners, miter cut soffit panels and install with soffit T-bar. Align joints and grooves of intersecting panels.
- D. Expansion Joints: Where soffit panel engages receiver channel and where aluminum components butt or adjoin other materials, leave expansion gap:
 - 1. Hot weather with aluminum components partially expanded: 1/16 inch.
 - 2. Cold weather with aluminum components partially contracted: 1/8 inch.
- E. Fastening: Install panels and trim with nails. Where exposed, use trim nails with color to match aluminum components.
 - 1. Drive fasteners straight and level. Do not slant fasteners.
 - 2. Do not drive head of fastener tightly against attachment flange. Allow 1/32 inch clearance between fastener head and aluminum surface.
 - 3. Do not place fastener through face of soffit panel.
 - 4. Spacing: Fasten soffit panels at 24 inches maximum.
- E. Sealants: Apply sealants where indicated on manufacturer's approved shop drawings and as required to provide weathertight installation. Depth of sealant bead shall be 1/4 inch minimum.

3.4 CLEANING AND PROTECTION

- A. Clean aluminum soffits and trim. Use detergent as required. Do not use solvents, abrasive, wire brushes, or steel scrapers.
- B. Remove Excess materials and debris from site.
- C. Protect soffit from subsequent construction operations. If damage occurs, remove and replace damaged components to provide installation in original, undamaged condition.

END OF SECTION

07600

FLASHING AND SHEET METAL

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Fascia Systems
- B. Metal Roof Flashing and Trim

1.2 RELATE TO OTHER SECTIONS

- A. Section 07900 - Sealants

1.3 REFERENCES

- A. ASTM A 526 – Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) by the Hot-Dip Process, Commercial Quality.
- B. ASTM A 527 – Specification for Steel Sheet, Zinc-Coated (Galvanized) by the Hot-Dip Process, Lock-Forming Quality.
- C. ASTM B 209 – Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate.
- D. National Roofing Contractors Association (NRCA) – “Roofing and Waterproofing Manual” third edition.
- E. Sheet Metal and Air Conditioning Contractor’s National Association (SMACNA) – Architectural Sheet Metal Manual.

1.4 SUBMITTALS

- A. Submit under provisions of Section 01300.
- B. Manufacturer’s data sheets on each product to be used, including:
 - 1. Preparation instructions and recommendations.
 - 2. Storage and handling requirements and recommendations.
 - 3. Installation method.
- C. Shop Drawings:
 - 1. Indicate material profile, dimensions, jointing pattern, jointing details, fastening methods, flashing, termination, and installation details.
 - 2. Show the layout of wall sections, attachment, joint details, trim flashing, accessories and air infiltration seals.
 - 3. Show thickness of treated wood nailers and substrate.
- D. Design Data:
 - 1. Submit manufacturer’s certification that product supplied meets Factory Mutual Research Corporation’s (FMRC) requirements for Roof Perimeter Flashing for use in Zone 1 and Zone 2 Windstorm Resistance Areas as defined in FME & R Loss Prevention Data Sheet 1-7 and 1-49 design recommendations, and meets the wind resistance requirements specified.
 - 2. Certify that perimeter metal edge systems furnished meet the specified design pressures as tested using ANSI/SPRI ES-1-98 test method RE-2 or RE-3 test methodology.
 - 3. Certify that membrane attachment by perimeter edge systems exceeds 100 lb/ft of force as tested by ANSI/SPRI ES-1-98 test method RE-1.
- E. Verification Samples: For each finish product specified, two samples, minimum size 6 inches square, representing actual product, color, and pattern.

1.5 QUALITY ASSURANCE

- A. Installer qualifications: Companies specializing in sheet metal work with 5 years documented experience.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Store products in manufacturer's unopened packaging until ready for installation.
- B. Store and dispose of solvent-based materials, and materials used with solvent-based materials, in accordance with requirements of local authorities having jurisdiction.
- C. Materials shall be delivered with identification labels, warnings and storage recommendations.
- D. Materials shall be stored in a clean, dry location prior to installation to prevent any damage to the contents. Store materials off the ground and protect from damage and deterioration as required by the material manufacturer.
- E. Handle materials to prevent damage to their surfaces, edges and ends of metal items. Damaged material shall be rejected and immediately removed from the site.

1.7 PROJECT CONDITIONS

- A. Maintain environmental conditions (temperature, humidity, and ventilation) within limits recommended by manufacturer for optimum results. Do not install products under environmental conditions outside manufacturer's absolute limits.

1.8 WARRANTY

- A. Warranty Certification: Installing contractor shall certify that sheet metal work has been installed per National Sheet Metal System's printed details and specifications.
- B. Manufacturer warrants sheet metal fabrications are warranted to be free of defects in material and workmanship for a period of five (5) years from date of shipment.
- C. Provide manufacturer's Twenty (20) year finish warranty for standard coil-coated Kynar 500 colors against peeling, chalking, fading, checking and crazing, commencing upon date of final completion.
- D. No other warranties either expressed or implied are acceptable unless so stated in writing.

PART 2 PRODUCTS

2.1 MANUFACTURERS

- A. Acceptable Manufacturer: National Sheet Metal Systems, Inc.; 2964 Alcove Dr., Scottsdale, GA 30079. Toll Free Tel: (877) 438-6385, Tel: (404) 298-9710, Web: www.nationalsheetmetal.com.
- B. Other manufacturer's as approved by the Architect.

2.2 FASCIA AND ROOF EDGE SYSTEMS

- A. Provide fascia/flashing system which meets the criteria recommended by Factory Mutual Research Corporation's (FRMC) requirements for Roof Perimeter Flashing for use in Zone 1 and Zone 2 Windstorm Resistance Areas as defined in FME & R Loss Prevention Data Sheet 1-7 and 1-49.
- B. 2-Piece Fascia:
 - 1. As shown on details.
- C. Accessories:
 - 1. Closure Cleat.
 - 2. Custom Fabrications as shown on details.
- D. Fascia Covers and Accessories to be Fabricated from:
 - 1. .050 inch aluminum ASTM B 209 3105-H14 alloy.
- E. Waterdam Components:
 - 1. 0.040 inch aluminum ASTM B 209 3105-H14 alloy.
- F. Standard Length of Product: Produce components in longest possible lengths for system specified.

- G. Aluminum Finish:
 - 1. Kynar 500/Hylar 5000 from manufacturer's standard coil-coated colors.
 - a. Color – As determined by District representative.

2.3 METAL ROOF FLASHING & TRIM

- A. Profile: As indicated on Roof Manufacturer's standard details.
 - 1. Pitch Break.
 - 2. Valley Flashing.
 - 3. Peak Flashing.
 - 4. Ridge/Hip Flashing.
 - 5. Eave Flashing.
 - 6. Outside Corner Flashing.
 - 7. Inside Corner Flashing.
 - 8. Material and Finish: 22 ga. Steel galvanized/paint grip.
- B. Steel Finish:
 - 1. Prefinished steel with Kynar 500/Hylar 5000 from manufacturer's standard colors.

2.4 MATERIALS

- A. Prefinished Zinc-Coated Steel: Hot-dip galvanized steel, commercial quality A1 S1 G90 extra smooth, primed on both sides and finished on 1 side with 70 percent Kynar 500 based fluorocarbon coating of minimum 0.70 mils total dry film thickness.
 - 1. Strippable coating: Shop-applied liquid to front side of pre-finished metal to protect finish during fabrication, shipment, and field handling.
- B. Prefinished Aluminum Sheet: ASTM B 209, alloy 3003, coil-coated, 70 percent Kynar based fluorocarbon coating of minimum 0.70 mils total dry film thickness.

2.5 FABRICATION

- A. General Metal Fabrication: Shop-fabricate work to the greatest extent possible. Comply with details indicated on Drawings, and with applicable requirements of SMACNA. Fabricate for waterproof and weather-resistant performance; with expansion provisions for running work. Form work to fit substrates. Comply with material manufacturer instructions and recommendations for forming material. Form exposed sheet metal work without excessive oil-canning, buckling, and tool marks, true to line and levels indicated, with exposed edges folded back to form hems.
- B. Seams: Fabricate non-moving seams in sheet metal with flat-lock seams. Form seams and solder tin edges to be seamed.
- C. Expansion and Contraction:
 - 1. Provide for thermal expansion and contraction, and building movement in completed work, without over-stressing the material, breaking connections, or producing wrinkles and distortion in finished surfaces. Make watertight and weather-resistant.
 - 2. Where subject to thermal expansion and contraction, attach members with clips to permit movement without damage, or provide slotted or oversize holes with washers only, as acceptable to Architect.
 - 3. Make lock seam work flat and true to line, and sweat full of solder, except where installed to permit expansion and contraction.
- a. Lap flat lock seams and soldered lap seams according to pitch, but in no case less than 3 inches. Make seams in direction of flow.
- D. Sealant Joints: Where movable, non-expansion type joints are indicated, or required for proper performance of work, form metal to provide for proper installation of sealant per SMACNA standards.
- E. Metal Separation: Separate metal from non-compatible metal or corrosive substrates by coating concealed surfaces at locations of contact with bituminous coatings or other permanent separation as recommended by manufacturer.

- F. Accessories:
 - 1. Factory assemblies shall be furnished to maintain watertight integrity.
 - 2. Provide matching accessories or other special fabrications from the manufacturer; color to match specified profile unless noted otherwise.
- G. Fascia/flushing sections furnished with strippable protective vinyl masking shall have film removed immediately before installation to prevent damage to the coating if left exposed to the ultra-violet rays of sunlight.

PART 3 EXECUTION

3.1 EXAMINATION

- A. Do not begin installation until substrates have been properly prepared.
- B. If substrate preparation is the responsibility of another installer, notify Architect of unsatisfactory preparation before proceeding.

3.2 PREPARATION

- A. Clean surfaces thoroughly prior to installation.
- B. Prepare surfaces using the methods recommended by the manufacturer for achieving the best result for the substrate under the project conditions.

3.3 INSTALLATION

- A. Install in accordance with manufacturer's instructions.
- B. Except as otherwise indicated, comply with SMACNA recommendations.
- C. Anchor units of work securely in place by methods indicated, providing for thermal expansion of metal units. Conceal fasteners wherever possible, and set units true to line and level. Install work with laps, joints, and seams that will be permanently watertight and weather-restive.
- D. Strictly follow the material manufacturer's printed installation requirements.
- E. Completed work shall be true to line without buckling, creasing, warp or wind in finished surfaces. "Oil-canning" surfaces are not acceptable.
- F. Isolate dissimilar metals, masonry or concrete from metals using bituminous paint, tape or slip-sheet. Use gasketed fasteners where required to prevent corrosive actions.
- G. Allow sufficient clearances for expansion and contraction of linear metal components. Secure metal using continuous cleats, clips and fasteners as required by the system. No exposed face fastening shall be accepted.

3.4 PROTECTION

- A. Protect installed products until completion of project.
- B. Maintain prefinished surfaces in undamaged condition until date of final completion. Repair or replace damaged components, any touch-up to be indistinguishable from undamaged surface/finish.
- C. Upon completion of work, a final inspection by the owner's representative shall be made. Any necessary corrective actions will be noted and the installing contractor shall make corrections within five (5) working days. Upon acceptance of the project, any applicable warranties shall be presented to the owner's representative.

END OF SECTION

07900

JOINT SEALERS

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Sealants and joint backing.
- B. Precompressed foam sealers.
- C. Hollow gaskets.

1.2 RELATED SECTIONS

- A. Section 07311: Sealants required in conjunction with waterproofing. (N.I.C.)
- B. Section 08800 - Glazing: Glazing sealants and accessories. (N.I.C.)
- C. Section 09260 - Gypsum Board Systems: Acoustic sealant. (N.I.C.)

1.3 REFERENCES

- A. ASTM C834 - Standard Specification for Latex Sealing Compounds.
- B. ASTM C920 - Standard Specification for Elastomeric Joint Sealants.
- C. ASTM C1193 - Standard Guide for Use of Joint Sealants.
- D. ASTM D1056 - Standard Specification for Flexible Cellular Materials - Sponge or Expanded Rubber.
- E. ASTM D1565 - Standard Specification for Flexible Cellular Materials -Vinyl Chloride Polymers and Copolymers (Open-Cell Foam).
- F. ASTM D1667 - Standard Specification for Flexible Cellular Materials -Vinyl Chloride Polymers and Copolymers (Closed-Cell Foam).

1.4 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing the Products specified in this section with minimum three years experience.
- B. Applicator Qualifications: Company specializing in performing the work of this section and approved by manufacturer.

1.5 ENVIRONMENTAL REQUIREMENTS

- A. Maintain temperature and humidity recommended by the sealant manufacturer during and after installation.

1.6 COORDINATION

- A. Section 01039 - Coordination and Meetings: Coordination requirements.
- B. Coordinate the work with all sections referencing this section.

1.7 WARRANTIES

- A. Section 01700 - Warranties.
- B. Correct defective work within a five-year period after Date of Substantial Completion.
- C. Warranty: Include coverage for installed sealants and accessories which fail to achieve airtight seal and exhibit loss of adhesion or cohesion or do not cure.

1.8 SEAL ANTS

- A. Type I - General Purpose Exterior Sealant: Polyurethane or Polysulfide; ASTM C920, Grade NS, Class 25, Uses M, G and A; single or multi- component.
 - 1. Standard colors matching finished surfaces.
- B. Type III - Exterior Metal Lap Joint Sealant: Butyl or polyisobutylene, non-drying, non-skinning, non-curing.
 - 1. Applications: Use for:
 - a. Concealed sealant bead in sheet metal work.
 - b. Concealed sealant bead in siding overlaps.

PART 2 PRODUCTS

2.2 ACCESS ORIES

- A. Primer: Non-staining type, recommended by sealant manufacturer to suit application.
- B. Joint Cleaner: Non-corrosive and non-staining type, recommended by sealant manufacturer; compatible with joint forming materials.
- C. Joint Backing: Round foam rod compatible with sealant; ASTM D1056, sponge or expanded rubber; oversized 30 to 50 percent larger than joint width.
- D. Bond Breaker: Pressure sensitive tape recommended by sealant manufacturer to suit application.

PART 3 EXECUTION

3.1 EXAM INATION

- A. Verify that substrate surfaces and joint openings are ready to receive work.
- B. Verify that joint backing and release tapes are compatible with sealant.

3.2 PREPAR ATION

- A. Remove loose materials and foreign matter that might impair adhesion of sealant.
- B. Clean and prime joints in accordance with manufacturer's instructions.
- C. Perform preparation in accordance with manufacturer's instructions and ASTM C1193.
- D. Protect elements surrounding the work of this section from damage or disfiguration.

3.3 INS TALLATION

- A. Perform installation in accordance with sealant manufacturer's requirements for preparation of surfaces and material installation instructions.
- B. Perform installation in accordance with ASTM C1193.
- C. Measure joint dimensions and size joint backers to achieve width-to-depth ratio, neck dimension, and surface bond area as recommended by manufacturer, except where specific dimensions are indicated.
- D. Install bond breaker where joint backing is not used.
- E. Install sealant free of air pockets, foreign embedded matter, ridges and sags.
- F. Apply sealant within recommended application temperature ranges. Consult manufacturer when sealant cannot be applied within these temperature ranges.

- G. Tool joints concave.
- H. Precompressed Foam Sealant: Do not stretch; avoid joints except at corners, ends, and intersections; install with face 1/8 to 1/4 inch below adjoining surface.
- I. Compression Gaskets: Avoid joints except at ends, corners, and intersections; seal all joints with adhesive; install with face 1/8 to 1/4 inch below adjoining surface.

3.4 CLEANING

- A. Clean adjacent soiled surfaces.

3.5 PROTECTION OF FINISHED WORK


- A. Protect sealants until cured.

END OF SECTION

Missouri

Division of Labor Standards

WAGE AND HOUR SECTION

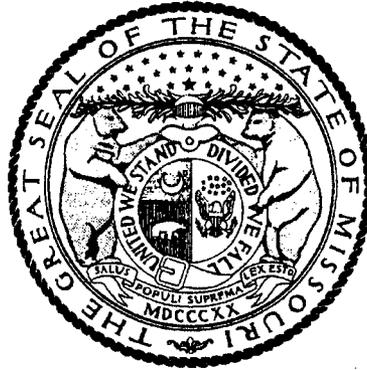

JEREMIAH W. (JAY) NIXON, Governor

Annual Wage Order No. 17

Section 017

CARROLL COUNTY

In accordance with Section 290.262 RSMo 2000, within thirty (30) days after a certified copy of this Annual Wage Order has been filed with the Secretary of State as indicated below, any person who may be affected by this Annual Wage Order may object by filing an objection in triplicate with the Labor and Industrial Relations Commission, P.O. Box 599, Jefferson City, MO 65102-0599. Such objections must set forth in writing the specific grounds of objection. Each objection shall certify that a copy has been furnished to the Division of Labor Standards, P.O. Box 449, Jefferson City, MO 65102-0449 pursuant to 8 CSR 20-5.010(1). A certified copy of the Annual Wage Order has been filed with the Secretary of State of Missouri.

Original Signed by _____

Carla Buschjost, Director
Division of Labor Standards

This Is A True And Accurate Copy Which Was Filed With The Secretary of State: March 10, 2010

Last Date Objections May Be Filed: April 9, 2010

Prepared by Missouri Department of Labor and Industrial Relations

Building Construction Rates for
CARROLL County

Section 017

OCCUPATIONAL TITLE	**Effective Date of Increase	*	Basic Hourly Rates	Over-Time Schedule	Holiday Schedule	Total Fringe Benefits
Asbestos Worker			\$33.04	52	53	\$21.63
Boilermaker			\$32.31	57	7	\$21.79
Bricklayers-Stone Mason			\$32.55	58	39	\$15.20
Carpenter			\$29.35	63	68	\$14.35
Cement Mason			\$24.47	65	4	\$17.06
Electrician (Inside Wireman)			\$33.83	13	72	\$15.25 + 10%
Communication Technician			USE ELECTRICIAN (INSIDE WIREMAN) RATE			
Elevator Constructor		a	\$39.610	26	54	\$21.428
Operating Engineer						
Group I			\$32.66	85	4	\$13.00
Group II			\$31.85	85	4	\$13.00
Group III			\$26.30	85	4	\$13.00
Group III-A			\$30.51	85	4	\$13.00
Group IV						
Group V			\$27.90	85	4	\$13.00
Pipe Fitter			\$37.73	2	33	\$18.24
Glazier			\$19.38	88	32	\$14.87
Laborer (Building):						
General			\$22.45	30	4	\$12.20
First Semi-Skilled			\$22.85	30	4	\$12.20
Second Semi-Skilled			\$23.25	30	4	\$12.20
Lather			USE CARPENTER RATE			
Linoleum Layer & Cutter			\$31.22	46	67	\$12.95
Marble Mason			\$30.89	25	4	\$12.90
Millwright			\$33.70	63	68	\$14.35
Iron Worker			\$26.75	50	4	\$20.35
Painter			\$22.58	37	4	\$13.07
Plasterer			\$23.89	94	5	\$11.27
Plumber			\$34.95	45	33	\$17.22
Pile Driver			\$33.70	63	68	\$14.35
Roofer			\$31.25	95	2	\$12.49
Sheet Metal Worker			\$35.63	17	22	\$15.80
Sprinkler Fitter			\$30.84	33	19	\$15.80
Terrazzo Worker			\$30.89	25	4	\$12.90
Tile Setter			\$30.89	25	4	\$12.90
Truck Driver-Teamster						
Group I			\$25.92	31	35	\$9.40
Group II			\$26.08	31	35	\$9.40
Group III			\$26.07	31	35	\$9.40
Group IV			\$26.19	31	35	\$9.40
Traffic Control Service Driver						
Welders-Acetylene & Electric		*				

Fringe Benefit Percentage is of the Basic Hourly Rate

Attention Workers: If you are not being paid the appropriate wage rate and fringe benefits contact the Division of Labor Standards at (573) 751-3403.

**CARROLL COUNTY
OVERTIME SCHEDULE - BUILDING CONSTRUCTION**

FED: Minimum requirement per Fair Labor Standards Act means time and one-half (1 ½) shall be paid for all work in excess of forty (40) hours per work week.

NO. 2: Means the maximum of eight (8) hours shall constitute a day's work beginning at 8:00 a.m. to 12:00 noon, 12:30 p.m. to 4:30 p.m. The maximum work week shall be forty (40) hours beginning Monday at 8:00 a.m. and ending Friday at 4:30 p.m. Because of traffic, parking or other circumstances, the hours of work on any project may be any continuous 8½ hours period (8 hours of work plus 30 minutes for lunch) between 7:00 a.m. and 4:30 p.m. When circumstances warrant and when it is mutually beneficial and agreed to, the Employer may institute a work week consisting of four (4) consecutive ten (10) hour days, between the hours of 7:00 a.m. and 6:00 p.m. Monday through Thursday, with one-half (½) hour allowed for a lunch period each day. Friday may be used as a make-up day. After ten (10) hours in a workday, or forty (40) hours in a workweek, overtime shall be paid at a rate of one and one-half (1½) times the regular rate of pay. Overtime performed Monday through Saturday shall be paid at the rate of one and one-half (1½) times the regular rate of pay. Sundays and recognized holidays shall be paid at the double (2) time rate of pay. Labor Day shall be paid at triple (3) time. Shift work may be performed at the option of the Contractor. However, whenever shift work is performed it must cover a period not less than (5) consecutive working days. The day shift shall work a regular eight (8) hours shift as outlined above. Employees working a second shift shall receive an additional \$0.25 above the regular hourly rate and perform seven and one-half (7½) hours work for eight (8) hours pay. Third shift employees shall be paid an additional \$0.50 above the regular hourly rate and work seven (7) hours for eight (8) hours pay. In the event a first shift is not required, a second and third shift employee shall receive an additional 15% of the base rate and receive pay for actual hours worked.

NO. 13: Means a regular workday shall consist of eight (8) hours between 8:00 a.m. and 4:30 p.m. Forty (40) hours, within five (5) days -- Monday through Friday inclusive -- shall constitute the regular workweek. The Employer may alter the above stated hours by two (2) hours for an early starting and quitting time only, not to exceed eight (8) hours of work in any one day. When job conditions dictate and as required by the customer, the Employer shall be allowed to establish a four (4) day, ten (10) hour per day work week. This work week is defined as Monday through Thursday, with a Friday make-up day. The normal work day under a ten (10) hour four (4) day work week shall be from 7:00 a.m. to 6:00 p.m., with a one hour starting variance. The make-up day of Friday shall be instituted for specific reasons such as loss of production due to weather and/or holidays. All hours worked in excess of ten (10) hours per day or forty (40) hours per week or hours worked outside the normal work week shall be paid at the applicable overtime rate. The first four (4) hours of overtime after the normal workday, each day Monday through Friday and the first ten (10) hours of overtime on Saturdays shall be paid for at one and one-half (1½) times the regular straight time rate of pay. All other work performed outside of the regularly scheduled working hours and outside of the first ten (10) hours worked on Saturdays shall be paid for at double (2) the regular straight time rate of pay. Sundays and the recognized holidays shall be paid for at double (2) the regular straight time rate of pay, if worked. When so elected by the contractor, multiple shifts of at least five (5) days duration may be worked. When two (2) or three (3) shifts are worked: The first shift (day shift) shall be worked between the hours of 8:00 a.m. and 4:30 p.m. Workmen on the "day shift" shall receive eight (8) hours pay at the regular hourly rate for eight (8) hours work. The second shift (swing shift) shall be worked between the hours of 4:30 p.m. and 12:30 a.m. Workmen on the "swing shift" shall receive eight (8) hours pay at the regular hourly rate plus 10% for seven and one-half (7 ½) hours work. The third shift (graveyard shift) shall be worked between the hours of 12:30 a.m. and 8:00 a.m. Workmen on the "graveyard shift" shall receive eight (8) hours pay at the regular hourly rate plus 15% for seven (7) hours work. A lunch period of thirty (30) minutes shall be allowed on each shift. All overtime work required after the completion of a regular shift shall be paid at one and one-half (1½) times the "shift" hourly rate.

**CARROLL COUNTY
OVERTIME SCHEDULE - BUILDING CONSTRUCTION**

NO. 17: Means the regular working day shall consist of eight (8) hours of labor between 7:00 a.m. and 3:30 p.m. and the regular work week shall consist of five (5) consecutive eight (8) hour days of labor beginning on Monday and ending with Friday of each week. All full-time or part-time labor performed during such hours shall be recognized as regular working hours and paid for at the regular hourly rate. Except as otherwise provided, all work performed outside of regular working hours during the regular work week, shall be at double (2) times the regular rate. Working hours may be varied by two (2) hours. When circumstances warrant and when it is mutually beneficial and agreed to by interested parties, the Employer may institute a work week consisting of four (4) consecutive ten (10) hour days, between the hours of five (5) a.m. and six (6) p.m., Monday through Thursday, with one-half (1/2) hour allowed for a lunch period each day. Friday may be used as a make-up day. The make-up day will be voluntary, and a decision not to work may not be held against the employee. When working four (4) ten (10) hour day's overtime will be paid at the time and one-half (1½) rate for the eleventh (11th) and twelfth (12th) hour, all other work will be paid at the double (2) time rate of pay. The first two (2) hours of overtime, Monday through Friday, and the first eight (8) hours on Saturday shall be at time and one-half (1½) for all work. All other overtime shall be at double (2) time. The first two (2) hours of overtime must be concurrent with the regular work day, two (2) hours prior to or following the regular work day are at time and one-half (1½). The regular workday (as previously defined) on Saturday is paid at time and one-half (1½). Work performed outside of the regular Saturday work day is at double (2) time. All work performed on recognized holidays, or days locally observed as such, and Sundays shall be paid at the double (2) time rate of pay.

NO. 25: Means regular working hours of eight (8) hours shall constitute a working day between the hours of 8:00 a.m. to 4:30 p.m. in a forty (40) hour working week of Monday through Friday. Employment on Saturday, Sunday and legal holidays, and employment before or after the regular working hours shall be considered overtime. Employment on Saturday, Sunday and legal holidays shall be paid for at twice (2) the regular hourly rate. Employment from 4:30 p.m. to 12:00 midnight, Monday through Friday, shall be paid for at one and one-half (1½) times the regular hourly rate. From 12:00 midnight until 8:00 a.m. on any day shall be paid for at twice (2) the regular hourly rate.

NO. 26: Means that the regular working day shall consist of eight (8) hours worked between 6:00 a.m., and 5:00 p.m., five (5) days per week, Monday to Friday, inclusive. Hours of work at each jobsite shall be those established by the general contractor and worked by the majority of trades. (The above working hours may be changed by mutual agreement). Work performed on Construction Work on Saturdays, Sundays and before and after the regular working day on Monday to Friday, inclusive, shall be classified as overtime, and paid for at double (2) the rate of single time. The employer may establish hours worked on a jobsite for a four (4) ten (10) hour day work week at straight time pay for construction work; the regular working day shall consist of ten (10) hours worked consecutively, between 6:00 a.m. and 6:00 p.m., four (4) days per week, Monday to Thursday, inclusive. Any work performed on Friday, Saturday, Sunday and holidays, and before and after the regular working day on Monday to Thursday where a four (4) ten (10) hour day workweek has been established, will be paid at two times (2) the single time rate of pay. The rate of pay for all work performed on holidays shall be at two times (2) the single time rate of pay.

NO. 30: Means Monday through Sunday shall constitute the work week. Regular starting time shall be 8:00 A.M., except when the work week is scheduled as a week with starting time advanced or delayed. Starting time may be advanced or delayed by the employer up to two (2) hours from the regular starting time. Eight (8) hours shall constitute the work day. All work performed prior to or after the regular eight (8) hour work day, as described above, and all work performed on Saturday shall be paid at time and one-half (1½) the regular rate. In the event that a scheduled eight (8) hour work day is missed (not to include holidays) because of events out of the control of the contractor, then that missed work day may be made up at straight time the following Saturday. It is recognized that not all employees working on a Saturday make-up day will have worked the same number of hours during the regular work week. It is further recognized that any work after the forty (40) hours in a week must be paid at time and one-half (1½). Saturday make-up day shall not be used to make up for time lost due to recognized holidays. The employer may establish a 4-10's schedule on projects (4 days with 10 hours per day). If using a 4-10's schedule, a Friday make-up day is allowed. If using a 4 (10) schedule, any work more than ten (10) hours in a day or forty (40) hours in a work week shall be paid at the time and one-half (1½) rate. Friday make-up day shall not be used to make up for time lost due to recognized holidays. All work performed on Sundays or holidays shall be paid at the double (2) time rate.

NO. 31: Means a regular work week shall consist of not more than forty (40) hours of work and all work performed over and above ten (10) hours per day and forty (40) hours per week shall be paid at the rate of time and one-half (1½). A workday is to begin between 6:00 a.m. and 9:00 a.m. at the option of the Employer except when inclement weather or other conditions beyond the reasonable control of the Employer, in which event, the starting time may be advanced or delayed. Work performed on recognized holidays or days observed as such, shall receive time and one-half (1½).

**CARROLL COUNTY
OVERTIME SCHEDULE - BUILDING CONSTRUCTION**

NO. 33: Means the standard work day and week shall be eight (8) consecutive hours of work between the hours of 6:00 a.m. and 6:00 p.m., excluding the lunch period Monday through Friday, or shall conform to the practice on the job site. Four (4) days at ten (10) hours a day may be worked at straight time, Monday through Friday and need not be consecutive. All overtime, except for Sundays and holidays shall be at the rate of time and one-half (1½). Overtime worked on Sundays and holidays shall be at double (2) time.

NO. 37: The Employer may choose, at his discretion, to work five eight hour days or four ten hour days with a Friday make-up day, Monday through Friday at straight time. Overtime shall be paid after eight (8) hours when working "five eights" and after ten hours when working "four tens". All work performed on Sundays and recognized holidays shall be paid for at the rate of double (2) time. All Saturday work shall be paid for at the rate of time and one-half (1½) the regular wage rate. All night work during the regular work week other than the above-mentioned days shall be paid for at the rate of time and one-half (1½) the regular wage scale until midnight and double (2) time after midnight except make-up time will be allowed under the following condition: In the event of inclement weather on exterior projects which prevents working the full regular eight (8) hour day, forty (40) hour work week schedule, a Saturday make-up day can be granted. Then said work on Saturday shall be paid at the straight time rate of pay up to a maximum total of forty (40) hours per week.

NO. 45: Means eight (8) hours shall constitute a day's work, beginning at 8:00 a.m. and ending at 4:30 p.m. The regular work week shall be forty (40) hours, beginning Monday, 8:00 a.m. and ending at 4:30 p.m. Friday. Because of traffic, parking and other circumstances, the hours of work on any project may begin as early as 6:00 a.m. with eight (8) hours worked between 6:00 a.m. and 4:30 p.m. When circumstances warrant and when it is mutually beneficial and agreed to, the employer may institute a work week consisting of four (4) consecutive ten (10) hour days, between the hours of 7:00 a.m. and 6:00 p.m., Monday through Thursday. Friday may be used as a make-up day. After ten (10) hours in a workday, or forty (40) hours in a workweek, overtime shall be paid at a rate of one and one-half (1½) times the regular rate of pay. All overtime Monday through Saturday shall be paid at the rate of time and one-half (1½) the regular rate of pay. Sunday and recognized holidays shall be paid at double (2) time. Labor Day shall be paid at triple (3) time. Shift work may be performed at the option of the Contractor. However, whenever shift work is performed it must cover a period not less than (5) consecutive working days. The day shift shall work a regular eight (8) hours shift as outlined above. The hourly rate for second shift (seven and one-half hours worked for eight hours paid) shall be twenty-five cents (\$0.25) over and above the hourly rate. The hourly rate for third shift (seven hours worked, eight hours paid) shall be fifty cents (\$0.50) above the hourly rate. If no first shift is worked, second and third shift employees shall receive an additional fifteen percent (15%) over and above the hourly rate for actual hours worked.

NO. 46: Means the regular work day shall be eight (8) hours from 6:00 a.m. to 6:30 p.m. Starting time may be between 6:00 a.m. and 10:00 a.m. The regular work week shall be forty (40) hours, beginning between 6:00 a.m. and 10:00 a.m. on Monday and ending between 2:30 p.m. and 6:30 p.m. on Friday. All hours in excess of the regular work day and work week shall be considered overtime. Overtime on days recognized as regular work days and on Saturday shall be paid for at the rate of time and one-half (1½) the regular rate. Sunday and recognized holidays shall be paid for at the rate of double time (2) for time worked. The Employer may establish a work week consisting of four (4) days, Monday through Thursday, each day consisting of ten (10) hours at straight time rate of pay. The 4-10's must run for a period of at least four (4) days.

NO. 50: Means eight (8) hours constitute a normal day's work Monday through Friday. Any time worked over eight (8) hours will normally be paid at time and one-half (1½) except for exclusions stated in some following additional sentences. The Employer, at his discretion, may start the work day between 6:00 a.m. and 9:00 a.m. Any schedule chosen shall be started at the beginning of the work week (Monday) and used for at least five days. Work may be scheduled on a four (4) days a week (Monday through Thursday) at ten (10) hours a day schedule. If such a schedule is employed, then Friday may be used as a make-up day when time is lost due to inclement weather. Time and one-half (1½) shall be paid for any work in excess of eight (8) hours in any regular work day Monday through Friday unless working 4-10's, then time and one-half (1½) after ten (10) hours. All work performed on Saturday will be time and one-half (1½). Double (2) time shall be paid for all work on Sundays and recognized holidays.

**CARROLL COUNTY
OVERTIME SCHEDULE - BUILDING CONSTRUCTION**

NO. 52: Means the regular workweek shall consist of five (5) eight (8) hour days, Monday through Friday. The regular workday shall consist of a eight (8) hour period, to be worked between the agreed upon starting time, and ending no later than 4:30 p.m. The agreed upon starting time shall be any time between the hours of 6:00 a.m. and 8:00 a.m. The option exists for the employer to use a four (4) day, ten (10) hour work week. Days worked shall be Monday through Thursday or Tuesday through Friday. If the job requires men on duty all five (5) days, then part of the crew may work the first four (4) days and the remainder of the crew may work the last four (4) days. Hours each day shall be from 7:00 a.m. to 5:30 p.m. Interested party's on the project must agree to this clause before it may be used. Once this clause has been put into effect, it shall remain as long as the majority of the Employees on the project and the Employer agree to keep it. The four (4) day clause shall not be used to circumvent a Holiday. Except as otherwise provided, all work performed outside the regular working hours and performed during the regular work week (Monday through Friday) shall be at the following rates of pay:

Holidays-New Year's Day, Memorial Day, Independence Day, Thanksgiving Day, Christmas Day (or days observed as such) shall be recognized as Holidays that shall be paid at two (2) times the regular rate of pay.

Labor Day-No work shall be performed on Labor Day except in special cases of emergency. Rate of pay shall be at three (3) times the regular rate of pay.

Overtime-Work performed outside of the regular work day (the regular work day shall consist of an eight (8) hour period, to be worked between the agreed upon starting time, and ending not later than 4:30 p.m. The agreed upon starting time shall be any time between the hours of 6:00 a.m. and 8:00 a.m., by mutual consent of the interested party's.), shall be:

- A. Hours worked Monday through Friday, the first two (2) hours of overtime will be paid at time and one-half (1½). All other overtime will be paid at the double (2) time rate.
- B. The first ten (10) hours worked on Saturday will be paid at time and one-half (1½), with all other hours to be paid at the double (2) time rate.
- C. Sundays and Holidays (except Labor Day) shall be paid at the double (2) time rate.

NO. 57: Means eight (8) hours per day shall constitute a day's work and forty (40) hours per week, Monday through Friday, shall constitute a week's work. The regular starting time shall be 8:00 a.m. The above may be changed by mutual consent of authorized personnel. When circumstances warrant, the Employer may change the regular workweek to four (4) ten-hour days at the regular time rate of pay. It being understood that all other pertinent information must be adjusted accordingly. All time worked before and after the established workday of eight (8) hours, Monday through Friday, all time worked on Saturday, shall be paid at the rate of time and one-half (1½) except in cases where work is part of an employee's regular Friday shift. All time worked on Sunday and recognized holidays shall be paid at the double (2) time rate of pay.

NO. 58: Means eight (8) consecutive hours, between 6:00 a.m. and 5:30 p.m., shall constitute a days work. Five (5) days work, Monday through Friday, shall constitute a normal work week. Work performed in excess of eight (8) hours per day or eight hours beyond normal starting time for that project excluding lunch Monday through Friday, and all work performed on Saturday, shall be paid for the rate of time and one-half (1½). When Sundays and recognized holidays are worked, the worker(s) shall be paid at the rate of double (2) time. Work may be scheduled on a four (4) days a week (Monday through Thursday) at ten (10) hours a day schedule at straight time. A Friday make-up day is available if time is lost due to inclement weather and at least sixteen (16) hours, but not more than thirty (30) hours, were worked during the week.

NO. 63: Means eight (8) hours shall constitute the regular work day between time that may be advanced or delayed by two (2) hours on either side of 8:00 AM. The Employer may establish a work week consisting of four (4) days, Monday through Thursday, each day consisting of ten (10) hours straight time. The four (4) tens (10s) must run for a period of at least four (4) days, Monday through Thursday. All work on Friday on a four (4) tens (10) project will be paid at the rate of time and one-half (1½). All work performed on Saturday shall be paid at time and one-half (1½). All work performed on Sundays and recognized holidays must be paid at double (2) time. All work performed prior to or after the regular eight (8) hour work day, or ten (10) hour work day, as described above shall be paid at time and one-half (1½) the regular rate.

**CARROLL COUNTY
OVERTIME SCHEDULE - BUILDING CONSTRUCTION**

NO. 65: Means Monday through Sunday shall constitute the work week. Regular starting time shall be 8:00 a.m., with one half hour for lunch between three and one-half (3½) and five (5) hours after starting time. The starting time may be advanced by two (2) hours or delayed one (1) hour by the employer from the regular starting time. All work performed before the advanced starting time and during the half hour lunch shall be paid at the overtime rate of time and one-half (1½). Work performed outside these hours shall be paid at the overtime rate of time and one-half (1½), except as provided otherwise below. All work performed on Sundays or recognized holidays shall be paid at the double (2) time rate. When the start time is delayed past 9:00 a.m., the employee's pay shall start at 9:00 a.m. and all time, after the normal quitting time (5:30 p.m.), shall be paid at the overtime rate. Eight (8) hours shall constitute the work day. All work performed prior to or after the regular eight (8) hour work day, as described above, and all work performed on Saturday shall be paid at time and one-half (1½) the regular rate. In the event that a scheduled eight (8) hour work day is missed (not including recognized holidays) because of inclement weather, then that missed work day may be made up at straight time on the following Saturday. It is recognized that not all employees working on a Saturday make-up day will have worked the same number of hours during the regular work week. It is further recognized that any work after forty (40) hours must be paid at time and one-half (1½). The employer may establish a 4-10's schedule on projects (4 days with 10 hours per day at straight time). In order to use the 4-10's schedule, the employer must schedule the 4-10's for a minimum of one (1) week. If using a 4-10's schedule, a Friday make-up day is allowed.

NO. 68: Means Monday through Sunday shall constitute the work week. Regular starting time shall be 8:00 a.m., with one half hour for lunch between three and one-half and five hours after starting time. The starting time may be advanced or delayed by the employer up to one hour from the regular starting time. All work performed before the advance starting time and during the half hour lunch shall be paid at the overtime rate of time and one-half (1½). Work performed outside these hours shall be paid at the overtime rate of time and one-half (1½), except as provided otherwise below. All work performed on Sundays or holidays shall be paid at the double (2) time rate. Eight (8) hours shall constitute the work day. All work performed prior to or after the regular eight (8) hour work day, as described above, and all work performed on Saturday shall be paid at time and one-half (1½) the regular rate, except as hereinafter described. In the event that a scheduled eight (8) hour work day is missed (not including recognized holidays) because of inclement weather, then that missed work day may be made up at straight time on the Saturday in the week of the pay period. It is recognized that not all employees working on a Saturday make-up day will have worked the same number of hours during the regular work week. It is further recognized that any work after forty (40) hours must be paid at time and one-half (1½). The employer may establish a 4-10's schedule on projects (4 days with 10 hours per day at straight time). In order to use the 4-10's schedule, the employer must schedule the 4-10's for a minimum of one (1) week. If using a 4-10's schedule, a Friday make-up day is allowed.

NO. 85: Means the work week shall be Monday through Sunday. Eight (8) hours shall constitute a day's work to begin between 6:00 a.m. and 9:00 a.m. and end between 2:30 p.m. to 5:30 p.m. Employees required to work during their lunch period shall receive the overtime rate. Employees shall receive time and one-half (1½) for all time they are required to work prior to their normal starting time or after eight (8) hours or normal quitting time Monday through Friday, or all day on Saturday. If an Employer has started the work week on a five day, eight hours a day schedule, and due to inclement weather misses any time, then he may switch to a nine or ten hours a day schedule, at straight time, for the remainder of that work week in order to make up for the lost time (10-hour make-up day). All work over ten (10) hours a day or over forty (40) hours a week must be paid at time & one-half (1½). Sundays and recognized holidays shall be paid at the double (2) time rate of pay. A contractor may alter the regular work week to four (4) ten (10) hour days at straight time rate of pay. To do this the scheduled 4-10's must be worked at least one full week and the regular workweek shall be Monday through Thursday with Friday being a make-up day at straight time for days missed in the regular workweek due to inclement weather. If 5-8's are being worked, Saturday may be used as a make-up day at straight time if inclement weather prevents work during the normal work week.

NO. 88: Means the regular work week shall consist of five (5) eight (8) hour days, 8:00 a.m. to 4:30 p.m., Monday through Friday, except when the work week is scheduled as a 4-10's week or as a week with start time advanced or delayed as described below. The starting time may be advanced or delayed by one hour on either side of 8:00 a.m. The advanced or delayed starting time must run for a period of at least five (5) days. The Employer may establish a work week consisting of four (4) days, during the regular work week, each day consisting of ten (10) hours at straight time. The 4-10's must run for a period of at least four (4) days. Time and one-half (1½) shall be paid for any work in excess of eight (8) hours in any regular work day Monday through Friday (or ten hours in a 4-10's week), the first eight (8) hours of a Saturday, and it shall be at time and one-half (1½) for the Friday and Saturday following Thanksgiving. Double (2) time shall be paid for the following time worked on Sunday, New Year's Day, Memorial Day, Fourth of July, Labor Day, Thanksgiving Day and Christmas Day, as well as any work in excess of eight (8) hours on a Saturday and the Saturday of a three-day weekend (except the Saturday following Thanksgiving).

**CARROLL COUNTY
OVERTIME SCHEDULE - BUILDING CONSTRUCTION**

NO. 94: Means eight (8) hours shall constitute a day's work between the hours of 8:00 a.m. and 5:00 p.m. The regular workday starting time of 8:00 a.m. (and resulting quitting time of 4:30 p.m.) may be moved forward to 6:00 a.m. or delayed one (1) hour to 9:00 a.m. All work performed in excess of the regular work day and on Saturday shall be compensated at one and one-half (1½) times the regular pay. In the event time is lost during the work week due to weather conditions, the Employer may schedule work on the following Saturday at straight time. All work accomplished on Sunday and holidays shall be compensated at double the regular rate of wages.

NO. 95: Means a regular workday shall consist of eight and one-half (8½) hours elapsed time, including one-half hour for lunch. The crew starting times shall be flexible within the period of daylight to 8:00 a.m. Any work performed over ten (10) hours of elapsed time per day including one-half hour for lunch and/or any work performed over forty (40) hours at the straight time rate in one week shall be paid at time and one-half (1½) the straight time rate. Saturday shall be a voluntary make-up day at straight time at the discretion of the contractor and with the consent of the employees. Sunday and recognized holidays shall be paid for at double (2) time.

**CARROLL COUNTY
HOLIDAY SCHEDULE – BUILDING CONSTRUCTION**

NO. 2: All work performed on New Year's Day, Memorial Day, Fourth of July, Labor Day, Thanksgiving Day, Christmas Day, or the days observed as such, shall be paid at the double time rate of pay.

NO. 4: All work done on New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving and Christmas Day shall be paid at the double time rate of pay. If any of the above holidays fall on Sunday, Monday will be observed as the recognized holiday. If any of the above holidays fall on Saturday, Friday will be observed as the recognized holiday.

NO. 5: All work that shall be done on New Year's Day, Memorial Day, Fourth of July, Labor Day, Veteran's Day, Thanksgiving Day, and Christmas Day shall be paid at the double (2) time rate of pay.

NO. 7: The following days are assigned days and are recognized as holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Veteran's Day, Thanksgiving Day, and Christmas Day. If a holiday falls on a Sunday, it shall be observed on the following Monday. If a holiday falls on a Saturday, it shall be observed on the preceding Friday. No work shall be performed on Labor Day except in case of jeopardy to work under construction. This is applied to protect Labor Day. When a holiday falls during the normal workweek, Monday through Friday, it shall be counted as eight (8) hours toward the forty (40) hour week. However, no reimbursement for this eight (8) hours is too paid to the workman unless worked. If workman are required to work the above enumerated holidays or days observed as such, or on Sunday, they shall receive double (2) the regular rate of pay for such work.

NO. 19: All work done on New Year's Day, Memorial Day, July 4th, Labor Day, Thanksgiving Day, and Christmas Day shall be paid at the double time rate of pay. The employee may take off Friday following Thanksgiving Day. However, the employee shall notify his or her Foreman, General Foreman or Superintendent on the Wednesday preceding Thanksgiving Day. When one of the above holidays falls on Sunday, the following Monday shall be considered a holiday and all work performed on either day shall be at the double (2) time rate. When one of the holidays falls on Saturday, the preceding Friday shall be considered a holiday and all work performed on either day shall be at the double (2) time rate.

NO. 22: All work performed on New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, Christmas Day, or days locally observed as such, and Sunday shall be recognized as holidays. If a holiday falls on Saturday, Friday shall be observed; if it falls on Sunday, Monday shall be observed. All work performed on holidays shall be paid at the double (2) time rate of pay.

NO. 32: All work performed for the Friday and Saturday following Thanksgiving shall be paid at the time and one-half (1½) rate of pay. All work performed on Sundays, New Year's Day, Memorial Day, Fourth of July, Labor Day, Thanksgiving Day and Christmas Day shall be paid at the double (2) time rate of pay. When one of the above holidays falls on Sunday, the following Monday shall be observed and when one of the above holidays falls on Saturday, the preceding Friday shall be observed.

NO. 33: All work done on New Year's Day, Memorial Day, Fourth of July, Thanksgiving Day and Christmas Day shall be paid at the double time rate of pay. Labor Day shall be paid at the triple (3) time rate of pay. If the holiday falls on Sunday, the following Monday will be observed; if the holiday falls on Saturday, the preceding Friday will be observed.

NO. 35: The following days are recognized as holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day and Christmas Day. If a holiday falls on a Sunday, it shall be observed on the following Monday. No work shall be performed on Labor Day except in case of jeopardy to work under construction. This rule is applied to protect Labor Day. When a holiday falls during the normal work week, Monday through Friday, it shall be counted as eight (8) hours toward the forty (40) hour week; however, no reimbursement for this eight (8) hours is to be paid the workman unless worked. An Employer working a four (4) day, ten (10) hour schedule may use Friday as a make-up day when an observed holiday occurs during the work week. Employees have the option to work that make-up day. If workmen are required to work the above enumerated holidays or days observed as such, they shall receive time and one-half (1 ½) the regular rate of pay for such work.

**CARROLL COUNTY
HOLIDAY SCHEDULE – BUILDING CONSTRUCTION**

NO. 39: No work shall be done on the following holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, and Christmas. Any of these holidays falling on Sunday, the following Monday shall be a holiday, and any of these holidays falling on Saturday, the preceding Friday shall be a holiday.

NO. 53: All work done on New Year's Day, Memorial Day, Independence Day, Thanksgiving Day, Christmas Day or days observed as such for these holidays shall be paid at the double (2) time rate of pay. No work shall be performed on Labor Day except in special cases of emergency, and then the rate of pay shall be at three (3) times the regular rate of pay. When a holiday falls on a Sunday, the following Monday shall be observed as the holiday. When a holiday falls on Saturday, the preceding Friday shall be observed as the holiday.

NO. 54: All work performed on New Year's Day, Memorial Day, Independence Day, Labor Day, Veteran's Day, Thanksgiving Day, the Friday after Thanksgiving Day, and Christmas Day shall be paid at the double (2) time rate of pay. When a holiday falls on Saturday, it shall be observed on Friday. When a holiday falls on Sunday, it shall be observed on Monday.

NO. 67: All work performed on New Year's Day, Memorial Day, Christmas Day, Fourth of July and Thanksgiving Day, from midnight to midnight, shall be paid for at the rate of double time (2) the basic rate of pay if required to work in addition to any other pay otherwise required hereunder as holiday pay. Positively no work shall be performed on Labor Day. Martin Luther King's Birthday, Veteran's Day, and the day after Thanksgiving Day shall be considered optional holidays, and if the Employer and employees agree that work will be performed on that day, no premium pay will be required. Should any of the above holidays fall on Saturday, the holiday will be observed on Friday. Should any of the above holidays fall on Sunday, the holiday will be observed on Monday.

NO. 68: All work performed on New Year's Day, Decoration Day (Memorial Day), Independence Day (Fourth of July), Labor Day, Thanksgiving Day, Christmas Day, or days observed as such, shall be paid at the rate of double (2) time. When a holiday falls on a Saturday, Friday shall be observed. When a holiday falls on a Sunday, Monday shall be observed. No work shall be performed on the Fourth of July or Labor Day except to save life or property. Where one of the holidays specified falls or is observed during the work week, then all work performed over and above thirty-two (32) hours in that week shall be paid at the rate of time and one-half (1½).

NO. 72: All work performed on New Year's Day, Memorial Day (last Monday in May), Independence Day, Labor Day, Thanksgiving Day and Christmas Day shall be paid for at double (2) the regular straight time rate of pay. Any one of the above listed holidays falling on Sunday shall be observed on the following Monday and paid for at double (2) the regular straight time rate of pay, if worked. Any one of the above listed holidays falling on Saturday shall be observed on the prior Friday and paid for at double (2) the regular straight time rate of pay, if worked. No work shall be performed on Labor Day except in case of emergency.

Heavy Construction Rates for
CARROLL County

Section 017

OCCUPATIONAL TITLE	*Effective Date of Increase	Basic Hourly Rates	Over-Time Schedule	Holiday Schedule	Total Fringe Benefits
CARPENTER					
Journeyman		\$27.67	7	16	\$10.55
Millwright		\$27.67	7	16	\$10.55
Pile Driver Worker		\$27.67	7	16	\$10.55
OPERATING ENGINEER					
Group I		\$28.90	5	15	\$12.55
Group II		\$28.50	5	15	\$12.55
Group III		\$28.50	5	15	\$12.55
Group IV		\$26.50	5	15	\$12.55
Oiler-Driver		\$26.50	5	15	\$12.55
LABORER					
General Laborer		\$21.39	4	18	\$9.54
Skilled Laborer		\$21.94	4	18	\$9.54
TRUCK DRIVER-TEAMSTER					
Group I		\$25.92	12	3	\$9.40
Group II		\$26.08	12	3	\$9.40
Group III		\$26.07	12	3	\$9.40
Group IV		\$26.19	12	3	\$9.40

Use Heavy Construction Rates on Highway and Heavy construction in accordance with the classifications of construction work established in 8 CSR 30-3.040(3).

Use Building Construction Rates on Building construction in accordance with the classifications of construction work established in 8 CSR 30-3.040(2).

If a worker is performing work on a heavy construction project within an occupational title that is not listed on the Heavy Construction Rate Sheet, use the rate for that occupational title as shown on the Building Construction Rate sheet.

**CARROLL COUNTY
OVERTIME SCHEDULE – HEAVY CONSTRUCTION**

FED: Minimum requirement per Fair Labor Standards Act means time and one-half (1 ½) shall be paid for all work in excess of forty (40) hours per work week.

NO. 4: Means a regular work week shall consist of not more than forty (40) hours of work, Monday through Saturday, and all work performed over and above ten (10) hours per day and forty (40) hours per week shall be paid at the rate of time & one-half (1½). Workers shall receive time and one-half (1½) for all work performed on Sundays and holidays. A work day is to begin between 6:00 a.m. and 9:00 a.m. at the option of the Employer except when inclement weather or other conditions beyond the reasonable control of the Employer prevent work, in which event, the starting time may be delayed, but not later than 12:00 noon. When a holiday falls during the normal work week, Monday through Friday, it shall be counted as eight (8) hours toward a forty (40) hour week; however, no reimbursement for this eight (8) hours is to be paid to the worker(s) unless worked.

NO. 5: Means a regular work week shall consist of not more than forty (40) hours work, Monday through Saturday, and all work performed over and above ten (10) hours per day and forty (40) hours per week shall be paid at the rate of time & one-half (1½). Workmen shall receive time and one-half (1½) for all work performed on Sundays and recognized holidays or days observed as such. Double (2) time shall be paid for work on Sunday or recognized holidays when and only if any other craft employees of the same employer at work on that same job site are receiving double (2) time pay for that Sunday or holiday. If a job can't work forty (40) hours, Monday through Saturday, because of inclement weather or other conditions beyond the control of the Employer, Friday and Saturday may be worked as make up days at straight time (if working 4-10's). Saturday may be worked as a make up day at straight time (if working 5-8's). Make up days shall not be utilized for days lost to holidays. A work day is to begin between 6:00 a.m. and 9:00 a.m. at the option of the Employer except when inclement weather or other conditions beyond the reasonable control of the Employer, including requirements of the owner, prevent work. In such event the starting time may be delayed but not later than 12:00 noon. Where one of the holidays falls or is observed during the work week, then all work performed over and above thirty-two (32) hours shall be paid at time & one-half (1½).

NO. 7: Means the regular work week shall start on Monday and end on Friday, except where the Employer elects to work Monday through Thursday, ten (10) hours per day. All work over ten (10) hours in a day or forty (40) hours in a week shall be at the overtime rate of one and one-half (1½) times the regular hourly rate. The regular work day shall be either eight (8) or ten (10) hours. If a job can't work forty (40) hours Monday through Friday because of inclement weather or other conditions beyond the control of the Employer, Friday or Saturday may be worked as a make-up day at straight time (if working 4-10's). Saturday may be worked as a make-up day at straight time (if working 5-8's). Make-up days shall not be utilized for days lost due to holidays. A workday is to begin at the option of the Employer but not later than 11:00 a.m. except when inclement weather, requirements of the owner or other conditions beyond the reasonable control of the Employer prevent work. Except as worked as a make-up day, time on Saturday shall be worked at one and one-half (1½) times the regular rate. Work performed on Sunday shall be paid at two (2) times the regular rate. Work performed on recognized holidays or days observed as such, shall also be paid at the double (2) time rate of pay.

NO. 12: Means a regular work week shall consist of not more than forty (40) hours of work and all work performed over and above ten (10) hours per day and forty (40) hours per week shall be paid at the rate of time & one-half (1½). A workday is to begin between 6:00 a.m. and 9:00 a.m. at the option of the Employer except when inclement weather or other conditions beyond the reasonable control of the Employer, in which event, the starting time may be advanced or delayed. Workers shall receive time and one-half (1½) for all work performed on recognized holidays or days observed as such.

**CARROLL COUNTY
HOLIDAY SCHEDULE – HEAVY CONSTRUCTION**

NO. 3: The following days are recognized as holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day and Christmas Day. If a holiday falls on a Sunday, it shall be observed on the following Monday. No work shall be performed on Labor Day except in case of jeopardy to work under construction. This rule is applied to protect Labor Day. When a holiday falls during the normal work week, Monday through Friday, it shall be counted as eight (8) hours toward the forty (40) hour week; however, no reimbursement for this eight (8) hours is to be paid to the workmen unless worked. An Employer working a four (4) day, ten (10) hour schedule may use Friday as a make up day when an observed holiday occurs during the work week. Employees have the option to work that make up day. If workmen are required to work the above enumerated holidays, or days observed as such, they shall receive time & one-half (1½) the regular rate of pay for such work.

NO. 15: The following days are recognized as holidays: New Year's Day, Memorial Day, July Fourth, Labor Day, Thanksgiving Day and Christmas Day. If a holiday falls on Sunday, it shall be observed on the following Monday. If a holiday falls on Saturday, it shall be observed on the preceding Friday. No work shall be performed on Labor Day except in case of jeopardy to work under construction. This rule is applied to protect Labor Day. If workmen are required to work the above enumerated holidays or days observed as such, they shall receive time and one-half (1½) the regular rate of pay for such work. Where one of the holidays specified falls or is observed during the workweek, then all work performed over and above thirty-two (32) hours in that week shall be paid at the rate of time and one-half (1½). Workmen shall receive time and one-half (1 ½) for all work performed on Sundays. Double (2) time shall be paid for work on Sunday or recognized holidays when and only if any other craft employees of the same employer at work on that same job site are receiving double (2) time for that Sunday or holiday.

NO. 16: The following days are recognized as holidays: New Year's Day, Memorial Day, Fourth of July, Labor Day, Thanksgiving Day and Christmas Day. If a holiday falls on Sunday, it shall be observed on the following Monday. If a holiday falls on Saturday, it shall be observed on the preceding Friday. No work shall be performed on Labor Day except in case of jeopardy to work under construction. This rule is applied to protect Labor Day. When a holiday falls during the normal work week, Monday through Friday, it shall be counted as eight (8) hours toward the forty (40) hour week; however, no reimbursement for this eight (8) hours is to be paid to the worker unless worked. If workers are required to work the above recognized holidays or days observed as such, they shall receive double (2) the regular rate of pay for such work.

NO. 18: All work performed on New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day and Christmas Day shall be paid at the time and one-half (1½) rate of pay. If a holiday falls on Sunday, it shall be observed on the following Monday. If a holiday falls on Saturday, it shall be observed on the preceding Friday. No work shall be performed on Labor Day except in case of jeopardy to work under construction. This rule is applied to protect Labor Day. When a holiday falls during the normal work week, Monday through Friday, it shall be counted as eight (8) hours toward a forty (40) hour week; however no reimbursement for this eight (8) hours is to be paid to the working person(s) unless the holiday is worked.

OUTSIDE ELECTRICIAN

These rates are to be used for the following counties:

Bates, Benton, Carroll, Cass, Clay, Henry, Jackson, Johnson, Lafayette, Pettis, Platte, Ray and Saline

COMMERCIAL WORK

Occupational Title	Basic	Total
	Hourly	Fringe
	Rate	Benefits
Journeyman Lineman	\$37.28	\$4.75 + 34%
Lineman Operator	\$34.78	\$4.75 + 34%
Groundman	\$24.70	\$4.75 + 34%

UTILITY WORK

Occupational Title	Basic	Total
	Hourly	Fringe
	Rate	Benefits
Journeyman Lineman	\$34.96	\$4.75 + 34%
Lineman Operator	\$32.31	\$4.75 + 34%
Groundman	\$22.53	\$4.75 + 34%


OVERTIME RATE: Eight (8) hours of work between the hours of 8:00 a.m. and 4:30 p.m. shall constitute a work day. Forty (40) hours within the five (5) days, Monday through Friday inclusive, shall constitute the work week. Starting time may be adjusted not to exceed two (2) hours. Work performed outside of the aforementioned will be paid at the applicable overtime rate. When starting time has been adjusted, all other provisions concerning the work day shall be adjusted accordingly. The overtime rate of pay shall be one and one-half (1½) times the regular rate of wages, other than on Sundays, holidays and from Midnight until 6:00 a.m., which will be paid at double (2) the straight time rate.

HOLIDAY RATE: Work performed on New Year's Day, Memorial Day, Fourth of July, Labor Day, Thanksgiving Day, Christmas Day, or days celebrated as such, shall be paid at the double time rate of pay. If the holiday falls on Saturday, it will be observed on Friday; if the holiday falls on Sunday, it will be observed on Monday, and shall be paid for at double (2) the regular straight time rate of pay.

Missouri

Division of Labor Standards

WAGE AND HOUR SECTION

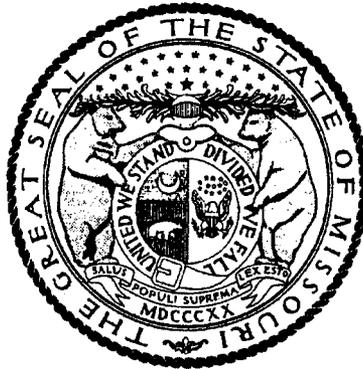

JEREMIAH W. (JAY) NIXON, Governor

Annual Wage Order No. 17

Section 101
SALINE COUNTY

In accordance with Section 290.262 RSMo 2000, within thirty (30) days after a certified copy of this Annual Wage Order has been filed with the Secretary of State as indicated below, any person who may be affected by this Annual Wage Order may object by filing an objection in triplicate with the Labor and Industrial Relations Commission, P.O. Box 599, Jefferson City, MO 65102-0599. Such objections must set forth in writing the specific grounds of objection. Each objection shall certify that a copy has been furnished to the Division of Labor Standards, P.O. Box 449, Jefferson City, MO 65102-0449 pursuant to 8 CSR 20-5.010(1). A certified copy of the Annual Wage Order has been filed with the Secretary of State of Missouri.

Original Signed by

Carla Buschjost, Director
Division of Labor Standards

This Is A True And Accurate Copy Which Was Filed With The Secretary of State: **March 10, 2010**

Last Date Objections May Be Filed: **April 9, 2010**

Prepared by Missouri Department of Labor and Industrial Relations

OCCUPATIONAL TITLE	**Effective Date of Increase	*	Basic Hourly Rates	Over-Time Schedule	Holiday Schedule	Total Fringe Benefits
Asbestos Worker			\$33.04	52	53	\$21.63
Boilermaker			\$32.31	57	7	\$21.79
Bricklayers-Stone Mason			\$27.48	59	7	\$13.60
Carpenter			\$31.53	63	68	\$14.35
Cement Mason			\$25.08	9	3	\$11.60
Electrician (Inside Wireman)			\$33.83	13	72	\$15.25 + 10%
Communication Technician			USE ELECTRICIAN (INSIDE WIREMAN) RATE			
Elevator Constructor		a	\$39.610	26	54	\$21.428
Operating Engineer						
Group I			\$32.66	85	4	\$13.00
Group II			\$31.85	85	4	\$13.00
Group III			\$26.30	85	4	\$13.00
Group III-A			\$30.51	85	4	\$13.00
Group IV						
Group V			\$27.90	85	4	\$13.00
Pipe Fitter			\$37.73	2	33	\$18.24
Glazier			\$19.38	88	32	\$14.87
Laborer (Building):						
General			\$22.45	30	4	\$12.20
First Semi-Skilled			\$22.85	30	4	\$12.20
Second Semi-Skilled			\$23.25	30	4	\$12.20
Lather			\$31.53	63	68	\$14.35
Linoleum Layer & Cutter			\$31.22	46	67	\$12.95
Marble Mason			\$20.62	124	74	\$12.03
Millwright			\$33.70	63	68	\$14.35
Iron Worker			\$24.50	50	4	\$21.50
Painter			\$22.58	37	4	\$13.07
Plasterer			\$23.89	94	5	\$11.27
Plumber			\$34.95	45	33	\$17.22
Pile Driver			\$33.70	63	68	\$14.35
Roofer			\$31.25	95	2	\$12.49
Sheet Metal Worker			\$35.63	17	22	\$15.80
Sprinkler Fitter			\$30.84	33	19	\$15.80
Terrazzo Worker			\$27.48	124	74	\$13.60
Tile Setter			\$20.62	124	74	\$12.03
Truck Driver-Teamster						
Group I			\$25.92	31	35	\$9.40
Group II			\$26.08	31	35	\$9.40
Group III			\$26.07	31	35	\$9.40
Goup IV			\$26.19	31	35	\$9.40
Traffic Control Service Driver						
Welders-Acetylene & Electric		*				

Fringe Benefit Percentage is of the Basic Hourly Rate

Attention Workers: If you are not being paid the appropriate wage rate and fringe benefits contact the Division of Labor Standards at (573) 751-3403.

**SALINE COUNTY
OVERTIME SCHEDULE - BUILDING CONSTRUCTION**

FED: Minimum requirement per Fair Labor Standards Act means time and one-half (1 ½) shall be paid for all work in excess of forty (40) hours per work week.

NO. 2: Means the maximum of eight (8) hours shall constitute a day's work beginning at 8:00 a.m. to 12:00 noon, 12:30 p.m. to 4:30 p.m. The maximum work week shall be forty (40) hours beginning Monday at 8:00 a.m. and ending Friday at 4:30 p.m. Because of traffic, parking or other circumstances, the hours of work on any project may be any continuous 8½ hours period (8 hours of work plus 30 minutes for lunch) between 7:00 a.m. and 4:30 p.m. When circumstances warrant and when it is mutually beneficial and agreed to, the Employer may institute a work week consisting of four (4) consecutive ten (10) hour days, between the hours of 7:00 a.m. and 6:00 p.m. Monday through Thursday, with one-half (½) hour allowed for a lunch period each day. Friday may be used as a make-up day. After ten (10) hours in a workday, or forty (40) hours in a workweek, overtime shall be paid at a rate of one and one-half (1½) times the regular rate of pay. Overtime performed Monday through Saturday shall be paid at the rate of one and one-half (1½) times the regular rate of pay. Sundays and recognized holidays shall be paid at the double (2) time rate of pay. Labor Day shall be paid at triple (3) time. Shift work may be performed at the option of the Contractor. However, whenever shift work is performed it must cover a period not less than (5) consecutive working days. The day shift shall work a regular eight (8) hours shift as outlined above. Employees working a second shift shall receive an additional \$0.25 above the regular hourly rate and perform seven and one-half (7½) hours work for eight (8) hours pay. Third shift employees shall be paid an additional \$0.50 above the regular hourly rate and work seven (7) hours for eight (8) hours pay. In the event a first shift is not required, a second and third shift employee shall receive an additional 15% of the base rate and receive pay for actual hours worked.

NO. 9: Means the regular workday starting time of 8:00 a.m. (and resulting quitting time of 4:30 p.m.) may be moved forward to 6:00 a.m. or delayed one hour to 9:00 a.m. All work performed in excess of the regular work day and on Saturday shall be compensated at one and one-half (1½) times the regular pay. In the event time is lost during the work week due to weather conditions, the Employer may schedule work on the following Saturday at straight time. All work accomplished on Sunday and holidays shall be compensated for at double the regular rate of wages. The work week shall be Monday through Friday, except for midweek holidays.

NO. 13: Means a regular workday shall consist of eight (8) hours between 8:00 a.m. and 4:30 p.m. Forty (40) hours, within five (5) days -- Monday through Friday inclusive -- shall constitute the regular workweek. The Employer may alter the above stated hours by two (2) hours for an early starting and quitting time only, not to exceed eight (8) hours of work in any one day. When job conditions dictate and as required by the customer, the Employer shall be allowed to establish a four (4) day, ten (10) hour per day work week. This work week is defined as Monday through Thursday, with a Friday make-up day. The normal work day under a ten (10) hour four (4) day work week shall be from 7:00 a.m. to 6:00 p.m., with a one hour starting variance. The make-up day of Friday shall be instituted for specific reasons such as loss of production due to weather and/or holidays. All hours worked in excess of ten (10) hours per day or forty (40) hours per week or hours worked outside the normal work week shall be paid at the applicable overtime rate. The first four (4) hours of overtime after the normal workday, each day Monday through Friday and the first ten (10) hours of overtime on Saturdays shall be paid for at one and one-half (1½) times the regular straight time rate of pay. All other work performed outside of the regularly scheduled working hours and outside of the first ten (10) hours worked on Saturdays shall be paid for at double (2) the regular straight time rate of pay. Sundays and the recognized holidays shall be paid for at double (2) the regular straight time rate of pay, if worked. When so elected by the contractor, multiple shifts of at least five (5) days duration may be worked. When two (2) or three (3) shifts are worked: The first shift (day shift) shall be worked between the hours of 8:00 a.m. and 4:30 p.m. Workmen on the "day shift" shall receive eight (8) hours pay at the regular hourly rate for eight (8) hours work. The second shift (swing shift) shall be worked between the hours of 4:30 p.m. and 12:30 a.m. Workmen on the "swing shift" shall receive eight (8) hours pay at the regular hourly rate plus 10% for seven and one-half (7 ½) hours work. The third shift (graveyard shift) shall be worked between the hours of 12:30 a.m. and 8:00 a.m. Workmen on the "graveyard shift" shall receive eight (8) hours pay at the regular hourly rate plus 15% for seven (7) hours work. A lunch period of thirty (30) minutes shall be allowed on each shift. All overtime work required after the completion of a regular shift shall be paid at one and one-half (1½) times the "shift" hourly rate.

**SALINE COUNTY
OVERTIME SCHEDULE - BUILDING CONSTRUCTION**

NO. 17: Means the regular working day shall consist of eight (8) hours of labor between 7:00 a.m. and 3:30 p.m. and the regular work week shall consist of five (5) consecutive eight (8) hour days of labor beginning on Monday and ending with Friday of each week. All full-time or part-time labor performed during such hours shall be recognized as regular working hours and paid for at the regular hourly rate. Except as otherwise provided, all work performed outside of regular working hours during the regular work week, shall be at double (2) times the regular rate. Working hours may be varied by two (2) hours. When circumstances warrant and when it is mutually beneficial and agreed to by interested parties, the Employer may institute a work week consisting of four (4) consecutive ten (10) hour days, between the hours of five (5) a.m. and six (6) p.m., Monday through Thursday, with one-half (1/2) hour allowed for a lunch period each day. Friday may be used as a make-up day. The make-up day will be voluntary, and a decision not to work may not be held against the employee. When working four (4) ten (10) hour day's overtime will be paid at the time and one-half (1½) rate for the eleventh (11th) and twelfth (12th) hour, all other work will be paid at the double (2) time rate of pay. The first two (2) hours of overtime, Monday through Friday, and the first eight (8) hours on Saturday shall be at time and one-half (1½) for all work. All other overtime shall be at double (2) time. The first two (2) hours of overtime must be concurrent with the regular work day, two (2) hours prior to or following the regular work day are at time and one-half (1½). The regular workday (as previously defined) on Saturday is paid at time and one-half (1½). Work performed outside of the regular Saturday work day is at double (2) time. All work performed on recognized holidays, or days locally observed as such, and Sundays shall be paid at the double (2) time rate of pay.

NO. 25: Means regular working hours of eight (8) hours shall constitute a working day between the hours of 8:00 a.m. to 4:30 p.m. in a forty (40) hour working week of Monday through Friday. Employment on Saturday, Sunday and legal holidays, and employment before or after the regular working hours shall be considered overtime. Employment on Saturday, Sunday and legal holidays shall be paid for at twice (2) the regular hourly rate. Employment from 4:30 p.m. to 12:00 midnight, Monday through Friday, shall be paid for at one and one-half (1½) times the regular hourly rate. From 12:00 midnight until 8:00 a.m. on any day shall be paid for at twice (2) the regular hourly rate.

NO. 26: Means that the regular working day shall consist of eight (8) hours worked between 6:00 a.m., and 5:00 p.m., five (5) days per week, Monday to Friday, inclusive. Hours of work at each jobsite shall be those established by the general contractor and worked by the majority of trades. (The above working hours may be changed by mutual agreement). Work performed on Construction Work on Saturdays, Sundays and before and after the regular working day on Monday to Friday, inclusive, shall be classified as overtime, and paid for at double (2) the rate of single time. The employer may establish hours worked on a jobsite for a four (4) ten (10) hour day work week at straight time pay for construction work; the regular working day shall consist of ten (10) hours worked consecutively, between 6:00 a.m. and 6:00 p.m., four (4) days per week, Monday to Thursday, inclusive. Any work performed on Friday, Saturday, Sunday and holidays, and before and after the regular working day on Monday to Thursday where a four (4) ten (10) hour day workweek has been established, will be paid at two times (2) the single time rate of pay. The rate of pay for all work performed on holidays shall be at two times (2) the single time rate of pay.

NO. 30: Means Monday through Sunday shall constitute the work week. Regular starting time shall be 8:00 A.M., except when the work week is scheduled as a week with starting time advanced or delayed. Starting time may be advanced or delayed by the employer up to two (2) hours from the regular starting time. Eight (8) hours shall constitute the work day. All work performed prior to or after the regular eight (8) hour work day, as described above, and all work performed on Saturday shall be paid at time and one-half (1½) the regular rate. In the event that a scheduled eight (8) hour work day is missed (not to include holidays) because of events out of the control of the contractor, then that missed work day may be made up at straight time the following Saturday. It is recognized that not all employees working on a Saturday make-up day will have worked the same number of hours during the regular work week. It is further recognized that any work after the forty (40) hours in a week must be paid at time and one-half (1½). Saturday make-up day shall not be used to make up for time lost due to recognized holidays. The employer may establish a 4-10's schedule on projects (4 days with 10 hours per day). If using a 4-10's schedule, a Friday make-up day is allowed. If using a 4 (10) schedule, any work more than ten (10) hours in a day or forty (40) hours in a work week shall be paid at the time and one-half (1½) rate. Friday make-up day shall not be used to make up for time lost due to recognized holidays. All work performed on Sundays or holidays shall be paid at the double (2) time rate.

**SALINE COUNTY
OVERTIME SCHEDULE - BUILDING CONSTRUCTION**

NO. 31: Means a regular work week shall consist of not more than forty (40) hours of work and all work performed over and above ten (10) hours per day and forty (40) hours per week shall be paid at the rate of time and one-half (1½). A workday is to begin between 6:00 a.m. and 9:00 a.m. at the option of the Employer except when inclement weather or other conditions beyond the reasonable control of the Employer, in which event, the starting time may be advanced or delayed. Work performed on recognized holidays or days observed as such, shall receive time and one-half (1½).

NO. 33: Means the standard work day and week shall be eight (8) consecutive hours of work between the hours of 6:00 a.m. and 6:00 p.m., excluding the lunch period Monday through Friday, or shall conform to the practice on the job site. Four (4) days at ten (10) hours a day may be worked at straight time, Monday through Friday and need not be consecutive. All overtime, except for Sundays and holidays shall be at the rate of time and one-half (1½). Overtime worked on Sundays and holidays shall be at double (2) time.

NO. 37: The Employer may choose, at his discretion, to work five eight hour days or four ten hour days with a Friday make-up day, Monday through Friday at straight time. Overtime shall be paid after eight (8) hours when working "five eights" and after ten hours when working "four tens". All work performed on Sundays and recognized holidays shall be paid for at the rate of double (2) time. All Saturday work shall be paid for at the rate of time and one-half (1½) the regular wage rate. All night work during the regular work week other than the above-mentioned days shall be paid for at the rate of time and one-half (1½) the regular wage scale until midnight and double (2) time after midnight except make-up time will be allowed under the following condition: In the event of inclement weather on exterior projects which prevents working the full regular eight (8) hour day, forty (40) hour work week schedule, a Saturday make-up day can be granted. Then said work on Saturday shall be paid at the straight time rate of pay up to a maximum total of forty (40) hours per week.

NO. 40: Means the regular working week shall consist of five (5) consecutive (8) hour days' labor on the job beginning with Monday and ending with Friday of each week. Four (4) 10-hour days may constitute the regular work week. The regular working day shall consist of eight (8) hours labor on the job beginning as early as 7:00 a.m. and ending as late as 5:30 p.m. All full or part time labor performed during such hours shall be recognized as regular working hours and paid for at the regular hourly rate. All hours worked on Saturday and all hours worked in excess of eight (8) hours but not more than twelve (12) hours during the regular working week shall be paid for at time and one-half (1½) the regular hourly rate. All hours worked on Sundays and holidays and all hours worked in excess of twelve (12) hours during the regular working day shall be paid at two (2) times the regular hourly rate. In the event of rain, snow, cold or excessively windy weather on a regular working day, Saturday may be designated as a "make-up" day. Saturday may also be designated as a "make-up" day, for an employee who has missed a day of work for personal or other reasons. Pay for "make-up" days shall be at regular rates.

NO. 45: Means eight (8) hours shall constitute a day's work, beginning at 8:00 a.m. and ending at 4:30 p.m. The regular work week shall be forty (40) hours, beginning Monday, 8:00 a.m. and ending at 4:30 p.m. Friday. Because of traffic, parking and other circumstances, the hours of work on any project may begin as early as 6:00 a.m. with eight (8) hours worked between 6:00 a.m. and 4:30 p.m. When circumstances warrant and when it is mutually beneficial and agreed to, the employer may institute a work week consisting of four (4) consecutive ten (10) hour days, between the hours of 7:00 a.m. and 6:00 p.m., Monday through Thursday. Friday may be used as a make-up day. After ten (10) hours in a workday, or forty (40) hours in a workweek, overtime shall be paid at a rate of one and one-half (1½) times the regular rate of pay. All overtime Monday through Saturday shall be paid at the rate of time and one-half (1½) the regular rate of pay. Sunday and recognized holidays shall be paid at double (2) time. Labor Day shall be paid at triple (3) time. Shift work may be performed at the option of the Contractor. However, whenever shift work is performed it must cover a period not less than (5) consecutive working days. The day shift shall work a regular eight (8) hours shift as outlined above. The hourly rate for second shift (seven and one-half hours worked for eight hours paid) shall be twenty-five cents (\$0.25) over and above the hourly rate. The hourly rate for third shift (seven hours worked, eight hours paid) shall be fifty cents (\$0.50) above the hourly rate. If no first shift is worked, second and third shift employees shall receive an additional fifteen percent (15%) over and above the hourly rate for actual hours worked.

**SALINE COUNTY
OVERTIME SCHEDULE - BUILDING CONSTRUCTION**

NO. 46: Means the regular work day shall be eight (8) hours from 6:00 a.m. to 6:30 p.m. Starting time may be between 6:00 a.m. and 10:00 a.m. The regular work week shall be forty (40) hours, beginning between 6:00 a.m. and 10:00 a.m. on Monday and ending between 2:30 p.m. and 6:30 p.m. on Friday. All hours in excess of the regular work day and work week shall be considered overtime. Overtime on days recognized as regular work days and on Saturday shall be paid for at the rate of time and one-half (1½) the regular rate. Sunday and recognized holidays shall be paid for at the rate of double time (2) for time worked. The Employer may establish a work week consisting of four (4) days, Monday through Thursday, each day consisting of ten (10) hours at straight time rate of pay. The 4-10's must run for a period of at least four (4) days.

NO. 50: Means eight (8) hours constitute a normal day's work Monday through Friday. Any time worked over eight (8) hours will normally be paid at time and one-half (1½) except for exclusions stated in some following additional sentences. The Employer, at his discretion, may start the work day between 6:00 a.m. and 9:00 a.m. Any schedule chosen shall be started at the beginning of the work week (Monday) and used for at least five days. Work may be scheduled on a four (4) days a week (Monday through Thursday) at ten (10) hours a day schedule. If such a schedule is employed, then Friday may be used as a make-up day when time is lost due to inclement weather. Time and one-half (1½) shall be paid for any work in excess of eight (8) hours in any regular work day Monday through Friday unless working 4-10's, then time and one-half (1½) after ten (10) hours. All work performed on Saturday will be time and one-half (1½). Double (2) time shall be paid for all work on Sundays and recognized holidays.

NO. 52: Means the regular workweek shall consist of five (5) eight (8) hour days, Monday through Friday. The regular workday shall consist of a eight (8) hour period, to be worked between the agreed upon starting time, and ending no later than 4:30 p.m. The agreed upon starting time shall be any time between the hours of 6:00 a.m. and 8:00 a.m. The option exists for the employer to use a four (4) day, ten (10) hour work week. Days worked shall be Monday through Thursday or Tuesday through Friday. If the job requires men on duty all five (5) days, then part of the crew may work the first four (4) days and the remainder of the crew may work the last four (4) days. Hours each day shall be from 7:00 a.m. to 5:30 p.m. Interested party's on the project must agree to this clause before it may be used. Once this clause has been put into effect, it shall remain as long as the majority of the Employees on the project and the Employer agree to keep it. The four (4) day clause shall not be used to circumvent a Holiday. Except as otherwise provided, all work performed outside the regular working hours and performed during the regular work week (Monday through Friday) shall be at the following rates of pay:

Holidays-New Year's Day, Memorial Day, Independence Day, Thanksgiving Day, Christmas Day (or days observed as such) shall be recognized as Holidays that shall be paid at two (2) times the regular rate of pay.

Labor Day-No work shall be performed on Labor Day except in special cases of emergency. Rate of pay shall be at three (3) times the regular rate of pay.

Overtime-Work performed outside of the regular work day (the regular work day shall consist of an eight (8) hour period, to be worked between the agreed upon starting time, and ending not later than 4:30 p.m. The agreed upon starting time shall be any time between the hours of 6:00 a.m. and 8:00 a.m., by mutual consent of the interested party's.), shall be:

- A. Hours worked Monday through Friday, the first two (2) hours of overtime will be paid at time and one-half (1½). All other overtime will be paid at the double (2) time rate.
- B. The first ten (10) hours worked on Saturday will be paid at time and one-half (1½), with all other hours to be paid at the double (2) time rate.
- C. Sundays and Holidays (except Labor Day) shall be paid at the double (2) time rate.

NO. 57: Means eight (8) hours per day shall constitute a day's work and forty (40) hours per week, Monday through Friday, shall constitute a week's work. The regular starting time shall be 8:00 a.m. The above may be changed by mutual consent of authorized personnel. When circumstances warrant, the Employer may change the regular workweek to four (4) ten-hour days at the regular time rate of pay. It being understood that all other pertinent information must be adjusted accordingly. All time worked before and after the established workday of eight (8) hours, Monday through Friday, all time worked on Saturday, shall be paid at the rate of time and one-half (1½) except in cases where work is part of an employee's regular Friday shift. All time worked on Sunday and recognized holidays shall be paid at the double (2) time rate of pay.

**SALINE COUNTY
OVERTIME SCHEDULE - BUILDING CONSTRUCTION**

NO. 59: Means that except as herein provided, eight (8) hours a day shall constitute a standard work day, and forty (40) hours per week shall constitute a week's work. All time worked outside of the standard eight (8) hour work day and on Saturday shall be classified as overtime and paid the rate of time and one-half (1½). All time worked on Sunday and holidays shall be classified as overtime and paid at the rate of double (2) time. The Employer has the option of working either five (5) eight hour days or four (4) ten hour days to constitute a normal forty (40) hour work week. When the four (4) ten-hour work week is in effect, the standard work day shall be consecutive ten (10) hour periods between the hours of 6:30 a.m. and 6:30 p.m. Forty (40) hours per week shall constitute a week's work, Monday through Thursday, inclusive. In the event the job is down for any reason beyond the Employer's control, then Friday and/or Saturday may, at the option of the Employer, be worked as a make-up day; straight time not to exceed ten (10) hours or forty (40) hours per week. When the five day eight (8) hour work week is in effect, forty (40) hours per week shall constitute a week's work, Monday through Friday, inclusive. In the event the job is down for any reason beyond the Employer's control, then Saturday may, at the option of the Employer, be worked as a make-up day; straight time not to exceed eight (8) hours or forty (40) hours per week. The regular starting time (and resulting quitting time) may be moved to 6:00 a.m. or delayed to 9:00 a.m. Make-up days shall not be utilized for days lost due to holidays.

NO. 63: Means eight (8) hours shall constitute the regular work day between time that may be advanced or delayed by two (2) hours on either side of 8:00 AM. The Employer may establish a work week consisting of four (4) days, Monday through Thursday, each day consisting of ten (10) hours straight time. The four (4) tens (10s) must run for a period of at least four (4) days, Monday through Thursday. All work on Friday on a four (4) tens (10) project will be paid at the rate of time and one-half (1½). All work performed on Saturday shall be paid at time and one-half (1½). All work performed on Sundays and recognized holidays must be paid at double (2) time. All work performed prior to or after the regular eight (8) hour work day, or ten (10) hour work day, as described above shall be paid at time and one-half (1½) the regular rate.

/NO. 85: Means the work week shall be Monday through Sunday. Eight (8) hours shall constitute a day's work to begin between 6:00 a.m. and 9:00 a.m. and end between 2:30 p.m. to 5:30 p.m. Employees required to work during their lunch period shall receive the overtime rate. Employees shall receive time and one-half (1½) for all time they are required to work prior to their normal starting time or after eight (8) hours or normal quitting time Monday through Friday, or all day on Saturday. If an Employer has started the work week on a five day, eight hours a day schedule, and due to inclement weather misses any time, then he may switch to a nine or ten hours a day schedule, at straight time, for the remainder of that work week in order to make up for the lost time (10-hour make-up day). All work over ten (10) hours a day or over forty (40) hours a week must be paid at time & one-half (1½). Sundays and recognized holidays shall be paid at the double (2) time rate of pay. A contractor may alter the regular work week to four (4) ten (10) hour days at straight time rate of pay. To do this the scheduled 4-10's must be worked at least one full week and the regular workweek shall be Monday through Thursday with Friday being a make-up day at straight time for days missed in the regular workweek due to inclement weather. If 5-8's are being worked, Saturday may be used as a make-up day at straight time if inclement weather prevents work during the normal work week.

NO. 88: Means the regular work week shall consist of five (5) eight (8) hour days, 8:00 a.m. to 4:30 p.m., Monday through Friday, except when the work week is scheduled as a 4-10's week or as a week with start time advanced or delayed as described below. The starting time may be advanced or delayed by one hour on either side of 8:00 a.m. The advanced or delayed starting time must run for a period of at least five (5) days. The Employer may establish a work week consisting of four (4) days, during the regular work week, each day consisting of ten (10) hours at straight time. The 4-10's must run for a period of at least four (4) days. Time and one-half (1½) shall be paid for any work in excess of eight (8) hours in any regular work day Monday through Friday (or ten hours in a 4-10's week), the first eight (8) hours of a Saturday, and it shall be at time and one-half (1½) for the Friday and Saturday following Thanksgiving. Double (2) time shall be paid for the following time worked on Sunday, New Year's Day, Memorial Day, Fourth of July, Labor Day, Thanksgiving Day and Christmas Day, as well as any work in excess of eight (8) hours on a Saturday and the Saturday of a three-day weekend (except the Saturday following Thanksgiving).

NO. 94: Means eight (8) hours shall constitute a day's work between the hours of 8:00 a.m. and 5:00 p.m. The regular workday starting time of 8:00 a.m. (and resulting quitting time of 4:30 p.m.) may be moved forward to 6:00 a.m. or delayed one (1) hour to 9:00 a.m. All work performed in excess of the regular work day and on Saturday shall be compensated at one and one-half (1½) times the regular pay. In the event time is lost during the work week due to weather conditions, the Employer may schedule work on the following Saturday at straight time. All work accomplished on Sunday and holidays shall be compensated at double the regular rate of wages.

**SALINE COUNTY
OVERTIME SCHEDULE - BUILDING CONSTRUCTION**

NO. 95: Means a regular workday shall consist of eight and one-half (8½) hours elapsed time, including one-half hour for lunch. The crew starting times shall be flexible within the period of daylight to 8:00 a.m. Any work performed over ten (10) hours of elapsed time per day including one-half hour for lunch and/or any work performed over forty (40) hours at the straight time rate in one week shall be paid at time and one-half (1½) the straight time rate. Saturday shall be a voluntary make-up day at straight time at the discretion of the contractor and with the consent of the employees. Sunday and recognized holidays shall be paid for at double (2) time.

NO. 124: Means eight (8) hours shall constitute a day's work on all classes of work between the hours of 6:00 a.m. and 5:30 p.m., Monday through Friday. The pay for time worked during these hours shall be at the regular wage rate. The regular workweek shall be Monday through Friday. Employment from 4:30 p.m. to 12:00 midnight, Monday through Friday, shall be paid for at one and one-half (1½) times the regular hourly rate. From 12:00 midnight until 8:00 a.m. on any day shall be paid for at twice the regular hourly rate. All time worked on Sundays and the recognized holidays shall be paid at the rate of double (2) time. It is understood that forty (40) hours shall constitute a regular workweek, (5-8's) Sunday Midnight through Friday Midnight, understanding anything over eight (8) hours is one and one-half (1½) times the hourly wage rate.

**SALINE COUNTY
HOLIDAY SCHEDULE – BUILDING CONSTRUCTION**

NO. 2: All work performed on New Year's Day, Memorial Day, Fourth of July, Labor Day, Thanksgiving Day, Christmas Day, or the days observed as such, shall be paid at the double time rate of pay.

NO. 3: All work done on New Year's Day, Memorial Day, Independence Day, Labor Day, Veteran's Day (November 11), Thanksgiving Day, and Christmas Day shall be compensated at the double (2) time rate of pay. When any of these holidays fall on a Sunday, the following Monday shall be observed. No work shall be performed on the days set forth except in cases of emergencies to protect life or property.

NO. 4: All work done on New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving and Christmas Day shall be paid at the double time rate of pay. If any of the above holidays fall on Sunday, Monday will be observed as the recognized holiday. If any of the above holidays fall on Saturday, Friday will be observed as the recognized holiday.

NO. 5: All work that shall be done on New Year's Day, Memorial Day, Fourth of July, Labor Day, Veteran's Day, Thanksgiving Day, and Christmas Day shall be paid at the double (2) time rate of pay.

NO. 7: The following days are assigned days and are recognized as holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Veteran's Day, Thanksgiving Day, and Christmas Day. If a holiday falls on a Sunday, it shall be observed on the following Monday. If a holiday falls on a Saturday, it shall be observed on the preceding Friday. No work shall be performed on Labor Day except in case of jeopardy to work under construction. This is applied to protect Labor Day. When a holiday falls during the normal workweek, Monday through Friday, it shall be counted as eight (8) hours toward the forty (40) hour week. However, no reimbursement for these eight (8) hours is too paid to the workman unless worked. If workman are required to work the above enumerated holidays or days observed as such, or on Sunday, they shall receive double (2) the regular rate of pay for such work.

NO. 19: All work done on New Year's Day, Memorial Day, July 4th, Labor Day, Thanksgiving Day, and Christmas Day shall be paid at the double time rate of pay. The employee may take off Friday following Thanksgiving Day. However, the employee shall notify his or her Foreman, General Foreman or Superintendent on the Wednesday preceding Thanksgiving Day. When one of the above holidays falls on Sunday, the following Monday shall be considered a holiday and all work performed on either day shall be at the double (2) time rate. When one of the holidays falls on Saturday, the preceding Friday shall be considered a holiday and all work performed on either day shall be at the double (2) time rate.

NO. 22: All work performed on New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, Christmas Day, or days locally observed as such, and Sunday shall be recognized as holidays. If a holiday falls on Saturday, Friday shall be observed; if it falls on Sunday, Monday shall be observed. All work performed on holidays shall be paid at the double (2) time rate of pay.

NO. 23: All work done on New Year's Day, Memorial Day, Independence Day, Labor Day, Veteran's Day, Thanksgiving Day, Christmas Day and Sundays shall be recognized holidays and shall be paid at the double time rate of pay. When a holiday falls on Sunday, the following Monday shall be considered a holiday.

NO. 32: All work performed for the Friday and Saturday following Thanksgiving shall be paid at the time and one-half (1½) rate of pay. All work performed on Sundays, New Year's Day, Memorial Day, Fourth of July, Labor Day, Thanksgiving Day and Christmas Day shall be paid at the double (2) time rate of pay. When one of the above holidays falls on Sunday, the following Monday shall be observed and when one of the above holidays falls on Saturday, the preceding Friday shall be observed.

NO. 33: All work done on New Year's Day, Memorial Day, Fourth of July, Thanksgiving Day and Christmas Day shall be paid at the double time rate of pay. Labor Day shall be paid at the triple (3) time rate of pay. If the holiday falls on Sunday, the following Monday will be observed; if the holiday falls on Saturday, the preceding Friday will be observed.

**SALINE COUNTY
HOLIDAY SCHEDULE – BUILDING CONSTRUCTION**

NO. 35: The following days are recognized as holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day and Christmas Day. If a holiday falls on a Sunday, it shall be observed on the following Monday. No work shall be performed on Labor Day except in case of jeopardy to work under construction. This rule is applied to protect Labor Day. When a holiday falls during the normal work week, Monday through Friday, it shall be counted as eight (8) hours toward the forty (40) hour week; however, no reimbursement for this eight (8) hours is to be paid the workman unless worked. An Employer working a four (4) day, ten (10) hour schedule may use Friday as a make-up day when an observed holiday occurs during the work week. Employees have the option to work that make-up day. If workmen are required to work the above enumerated holidays or days observed as such, they shall receive time and one-half (1 ½) the regular rate of pay for such work.

NO. 53: All work done on New Year's Day, Memorial Day, Independence Day, Thanksgiving Day, Christmas Day or days observed as such for these holidays shall be paid at the double (2) time rate of pay. No work shall be performed on Labor Day except in special cases of emergency, and then the rate of pay shall be at three (3) times the regular rate of pay. When a holiday falls on a Sunday, the following Monday shall be observed as the holiday. When a holiday falls on Saturday, the preceding Friday shall be observed as the holiday.

NO. 54: All work performed on New Year's Day, Memorial Day, Independence Day, Labor Day, Veteran's Day, Thanksgiving Day, the Friday after Thanksgiving Day, and Christmas Day shall be paid at the double (2) time rate of pay. When a holiday falls on Saturday, it shall be observed on Friday. When a holiday falls on Sunday, it shall be observed on Monday.

NO. 67: All work performed on New Year's Day, Memorial Day, Christmas Day, Fourth of July and Thanksgiving Day, from midnight to midnight, shall be paid for at the rate of double time (2) the basic rate of pay if required to work in addition to any other pay otherwise required hereunder as holiday pay. Positively no work shall be performed on Labor Day. Martin Luther King's Birthday, Veteran's Day, and the day after Thanksgiving Day shall be considered optional holidays, and if the Employer and employees agree that work will be performed on that day, no premium pay will be required. Should any of the above holidays fall on Saturday, the holiday will be observed on Friday. Should any of the above holidays fall on Sunday, the holiday will be observed on Monday.

NO. 68: All work performed on New Year's Day, Decoration Day (Memorial Day), Independence Day (Fourth of July), Labor Day, Thanksgiving Day, Christmas Day, or days observed as such, shall be paid at the rate of double (2) time. When a holiday falls on a Saturday, Friday shall be observed. When a holiday falls on a Sunday, Monday shall be observed. No work shall be performed on the Fourth of July or Labor Day except to save life or property. Where one of the holidays specified falls or is observed during the work week, then all work performed over and above thirty-two (32) hours in that week shall be paid at the rate of time and one-half (1½).

NO. 72: All work performed on New Year's Day, Memorial Day (last Monday in May), Independence Day, Labor Day, Thanksgiving Day and Christmas Day shall be paid for at double (2) the regular straight time rate of pay. Any one of the above listed holidays falling on Sunday shall be observed on the following Monday and paid for at double (2) the regular straight time rate of pay, if worked. Any one of the above listed holidays falling on Saturday shall be observed on the prior Friday and paid for at double (2) the regular straight time rate of pay, if worked. No work shall be performed on Labor Day except in case of emergency.

NO. 74: All work performed on New Year's Day, Memorial Day, Fourth of July, Labor Day, Veteran's Day, Thanksgiving Day and Christmas Day, shall be paid at double (2) time of the hourly rate of pay. In the event one of the above holiday's falls on Saturday, the holiday shall be celebrated on Saturday. If the holiday falls on Sunday, the holiday will be celebrated on Monday.

Heavy Construction Rates for
SALINE County

Section 101

OCCUPATIONAL TITLE	*Effective Date of Increase	Basic Hourly Rates	Over-Time Schedule	Holiday Schedule	Total Fringe Benefits
CARPENTER					
Journeymen		\$27.67	7	16	\$10.55
Millwright		\$27.67	7	16	\$10.55
Pile Driver Worker		\$27.67	7	16	\$10.55
OPERATING ENGINEER					
Group I		\$28.90	5	15	\$12.55
Group II		\$28.50	5	15	\$12.55
Group III		\$28.50	5	15	\$12.55
Group IV		\$26.50	5	15	\$12.55
Oiler-Driver		\$26.50	5	15	\$12.55
LABORER					
General Laborer		\$21.39	4	18	\$9.54
Skilled Laborer		\$21.94	4	18	\$9.54
TRUCK DRIVER-TEAMSTER					
Group I		\$25.92	12	3	\$9.40
Group II		\$26.08	12	3	\$9.40
Group III		\$26.07	12	3	\$9.40
Group IV		\$26.19	12	3	\$9.40

Use Heavy Construction Rates on Highway and Heavy construction in accordance with the classifications of construction work established in 8 CSR 30-3.040(3).

Use Building Construction Rates on Building construction in accordance with the classifications of construction work established in 8 CSR 30-3.040(2).

If a worker is performing work on a heavy construction project within an occupational title that is not listed on the Heavy Construction Rate Sheet, use the rate for that occupational title as shown on the Building Construction Rate sheet.

**SALINE COUNTY
OVERTIME SCHEDULE – HEAVY CONSTRUCTION**

FED: Minimum requirement per Fair Labor Standards Act means time and one-half (1 ½) shall be paid for all work in excess of forty (40) hours per work week.

NO. 4: Means a regular work week shall consist of not more than forty (40) hours of work, Monday through Saturday, and all work performed over and above ten (10) hours per day and forty (40) hours per week shall be paid at the rate of time & one-half (1½). Workers shall receive time and one-half (1½) for all work performed on Sundays and holidays. A work day is to begin between 6:00 a.m. and 9:00 a.m. at the option of the Employer except when inclement weather or other conditions beyond the reasonable control of the Employer prevent work, in which event, the starting time may be delayed, but not later than 12:00 noon. When a holiday falls during the normal work week, Monday through Friday, it shall be counted as eight (8) hours toward a forty (40) hour week; however, no reimbursement for this eight (8) hours is to be paid to the worker(s) unless worked.

NO. 5: Means a regular work week shall consist of not more than forty (40) hours work, Monday through Saturday, and all work performed over and above ten (10) hours per day and forty (40) hours per week shall be paid at the rate of time & one-half (1½). Workmen shall receive time and one-half (1½) for all work performed on Sundays and recognized holidays or days observed as such. Double (2) time shall be paid for work on Sunday or recognized holidays when and only if any other craft employees of the same employer at work on that same job site are receiving double (2) time pay for that Sunday or holiday. If a job can't work forty (40) hours, Monday through Saturday, because of inclement weather or other conditions beyond the control of the Employer, Friday and Saturday may be worked as make up days at straight time (if working 4-10's). Saturday may be worked as a make up day at straight time (if working 5-8's). Make up days shall not be utilized for days lost to holidays. A work day is to begin between 6:00 a.m. and 9:00 a.m. at the option of the Employer except when inclement weather or other conditions beyond the reasonable control of the Employer, including requirements of the owner, prevent work. In such event the starting time may be delayed but not later than 12:00 noon. Where one of the holidays falls or is observed during the work week, then all work performed over and above thirty-two (32) hours shall be paid at time & one-half (1½).

NO. 7: Means the regular work week shall start on Monday and end on Friday, except where the Employer elects to work Monday through Thursday, ten (10) hours per day. All work over ten (10) hours in a day or forty (40) hours in a week shall be at the overtime rate of one and one-half (1½) times the regular hourly rate. The regular work day shall be either eight (8) or ten (10) hours. If a job can't work forty (40) hours Monday through Friday because of inclement weather or other conditions beyond the control of the Employer, Friday or Saturday may be worked as a make-up day at straight time (if working 4-10's). Saturday may be worked as a make-up day at straight time (if working 5-8's). Make-up days shall not be utilized for days lost due to holidays. A workday is to begin at the option of the Employer but not later than 11:00 a.m. except when inclement weather, requirements of the owner or other conditions beyond the reasonable control of the Employer prevent work. Except as worked as a make-up day, time on Saturday shall be worked at one and one-half (1½) times the regular rate. Work performed on Sunday shall be paid at two (2) times the regular rate. Work performed on recognized holidays or days observed as such, shall also be paid at the double (2) time rate of pay.

NO. 12: Means a regular work week shall consist of not more than forty (40) hours of work and all work performed over and above ten (10) hours per day and forty (40) hours per week shall be paid at the rate of time & one-half (1½). A workday is to begin between 6:00 a.m. and 9:00 a.m. at the option of the Employer except when inclement weather or other conditions beyond the reasonable control of the Employer, in which event, the starting time may be advanced or delayed. Workers shall receive time and one-half (1½) for all work performed on recognized holidays or days observed as such.

**SALINE COUNTY
HOLIDAY SCHEDULE – HEAVY CONSTRUCTION**

NO. 3: The following days are recognized as holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day and Christmas Day. If a holiday falls on a Sunday, it shall be observed on the following Monday. No work shall be performed on Labor Day except in case of jeopardy to work under construction. This rule is applied to protect Labor Day. When a holiday falls during the normal work week, Monday through Friday, it shall be counted as eight (8) hours toward the forty (40) hour week; however, no reimbursement for this eight (8) hours is to be paid to the workmen unless worked. An Employer working a four (4) day, ten (10) hour schedule may use Friday as a make up day when an observed holiday occurs during the work week. Employees have the option to work that make up day. If workmen are required to work the above enumerated holidays, or days observed as such, they shall receive time & one-half (1½) the regular rate of pay for such work.

NO. 15: The following days are recognized as holidays: New Year's Day, Memorial Day, July Fourth, Labor Day, Thanksgiving Day and Christmas Day. If a holiday falls on Sunday, it shall be observed on the following Monday. If a holiday falls on Saturday, it shall be observed on the preceding Friday. No work shall be performed on Labor Day except in case of jeopardy to work under construction. This rule is applied to protect Labor Day. If workmen are required to work the above enumerated holidays or days observed as such, they shall receive time and one-half (1½) the regular rate of pay for such work. Where one of the holidays specified falls or is observed during the workweek, then all work performed over and above thirty-two (32) hours in that week shall be paid at the rate of time and one-half (1½). Workmen shall receive time and one-half (1 ½) for all work performed on Sundays. Double (2) time shall be paid for work on Sunday or recognized holidays when and only if any other craft employees of the same employer at work on that same job site are receiving double (2) time for that Sunday or holiday.

NO. 16: The following days are recognized as holidays: New Year's Day, Memorial Day, Fourth of July, Labor Day, Thanksgiving Day and Christmas Day. If a holiday falls on Sunday, it shall be observed on the following Monday. If a holiday falls on Saturday, it shall be observed on the preceding Friday. No work shall be performed on Labor Day except in case of jeopardy to work under construction. This rule is applied to protect Labor Day. When a holiday falls during the normal work week, Monday through Friday, it shall be counted as eight (8) hours toward the forty (40) hour week; however, no reimbursement for this eight (8) hours is to be paid to the worker unless worked. If workers are required to work the above recognized holidays or days observed as such, they shall receive double (2) the regular rate of pay for such work.

NO. 18: All work performed on New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day and Christmas Day shall be paid at the time and one-half (1½) rate of pay. If a holiday falls on Sunday, it shall be observed on the following Monday. If a holiday falls on Saturday, it shall be observed on the preceding Friday. No work shall be performed on Labor Day except in case of jeopardy to work under construction. This rule is applied to protect Labor Day. When a holiday falls during the normal work week, Monday through Friday, it shall be counted as eight (8) hours toward a forty (40) hour week; however no reimbursement for this eight (8) hours is to be paid to the working person(s) unless the holiday is worked.

OUTSIDE ELECTRICIAN

These rates are to be used for the following counties:

Bates, Benton, Carroll, Cass, Clay, Henry, Jackson, Johnson, Lafayette, Pettis, Platte, Ray and Saline

COMMERCIAL WORK

Occupational Title	Basic	Total
	Hourly	Fringe
	Rate	Benefits
Journeyman Lineman	\$37.28	\$4.75 + 34%
Lineman Operator	\$34.78	\$4.75 + 34%
Groundman	\$24.70	\$4.75 + 34%

UTILITY WORK

Occupational Title	Basic	Total
	Hourly	Fringe
	Rate	Benefits
Journeyman Lineman	\$34.96	\$4.75 + 34%
Lineman Operator	\$32.31	\$4.75 + 34%
Groundman	\$22.53	\$4.75 + 34%

OVERTIME RATE: Eight (8) hours of work between the hours of 8:00 a.m. and 4:30 p.m. shall constitute a work day. Forty (40) hours within the five (5) days, Monday through Friday inclusive, shall constitute the work week. Starting time may be adjusted not to exceed two (2) hours. Work performed outside of the aforementioned will be paid at the applicable overtime rate. When starting time has been adjusted, all other provisions concerning the work day shall be adjusted accordingly. The overtime rate of pay shall be one and one-half (1½) times the regular rate of wages, other than on Sundays, holidays and from Midnight until 6:00 a.m., which will be paid at double (2) the straight time rate.

HOLIDAY RATE: Work performed on New Year's Day, Memorial Day, Fourth of July, Labor Day, Thanksgiving Day, Christmas Day, or days celebrated as such, shall be paid at the double time rate of pay. If the holiday falls on Saturday, it will be observed on Friday; if the holiday falls on Sunday, it will be observed on Monday, and shall be paid for at double (2) the regular straight time rate of pay.