

### FTB 324

#### Medium Intensity Dual Xenon Lighting System

#### Application

The FTB 324 is an FAA L865/L864 system that includes a white xenon flashing light for day, a red xenon flashing light for night and (3) markers to create an FAA tower type E1 or E2 for structures between 200' and 500' AGL.


#### Features/Benefits

- Automatic fail safe to day mode and notification if system has not changed states in 19 hours
- (3) Dry contact data points
- Fresnel optics minimizes light scatter
- (12) LED indicators to convey operating status
- (2) Year parts warranty on all components including tubes
- L-810 marker kit design eliminates conduit
- NEMA 4X outdoor rated stainless steel enclosure
- Accommodates 120-240 VAC 50/60 Hz
- Wireless synchronization available
  
- Optional: upgrade to Eagle  
-24/7/365 Monitoring & Call Center services
- Optional: upgrade to Infrared (IR) Markers



#### Power Consumption

- 130w—White Day
- 145w—Red Night
- 55w—White Night Backup
- LED markers—2.7w

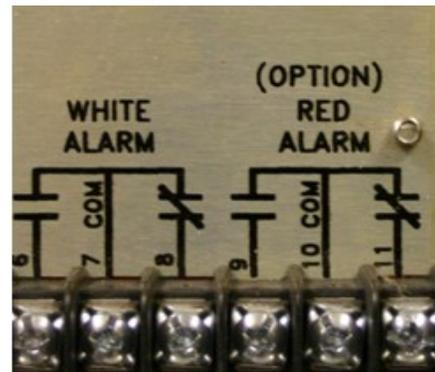


The dry contact alarm data points on all Flash Xenon products are configurable for normally open or normally closed. Alarms contacts are provided for white beacon, red beacon, and markers.

### FTB 324

#### Medium Intensity Dual Xenon Lighting System

Diagram from FAA Advisory Circular AC 70/7460-1K Change 2, A1-18. The FAA determination of no hazard for these towers are: Chapters 2, 4, 8

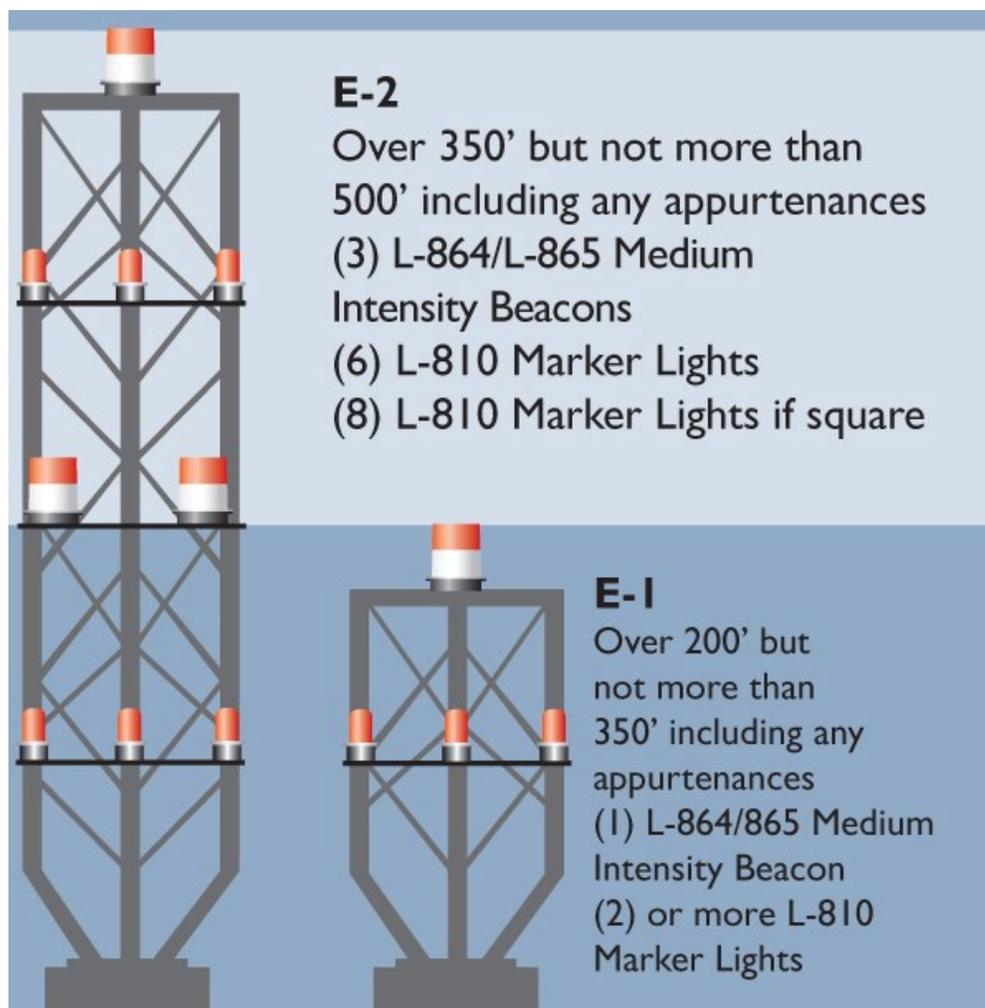

These guidelines are for reference only.  
Please contact Flash for specific questions regarding obstruction marking.