



MISSOURI  
HIGHWAYS and TRANSPORTATION  
COMMISSION  
JEFFERSON CITY, MISSOURI  
**BID FORMS**  
AND  
**SPECIFICATIONS**  
FOR  
CONSTRUCTING OR IMPROVING  
CENTRAL DISTRICT  
REST AREA SIDEWALKS  
BOONVILLE, MISSOURI  
IFB 9-110706

## TABLE OF CONTENTS

DIVISION		PAGE
<b>DIVISION 0 - BIDDING AND CONTRACT INFORMATION</b>		
	FINAL CHECKLIST BEFORE SUBMITTING PROPOSAL	1
	NEWSPAPER ADVERTISEMENT Notice to Contractors	2
00020	INVITATION TO BID	3
00100	BIDDER REQUIREMENTS	4
00301	BID FORM	13
00430	SUBCONTRACTOR LISTING	16
00600	BID BOND	17
<b>DIVISION 1 – GENERAL REQUIREMENTS (BROAD SCOPE)</b>		
01019	CONTRACT REQUIREMENTS	18
01039	COORDINATION AND MEETING REQUIREMENT	20
01300	SUBMITTAL REQUIREMENTS	23
01400	QUALITY CONTROL REQUIREMENTS	27
01500	CONSTRUCTION FACILITIES AND TEMPORARY CONTROL REQUIREMENTS	29
01600	MATERIAL AND EQUIPMENT REQUIREMENT	31
01700	CONTRACT CLOSEOUT REQUIREMENT	33
<b>DIVISION 2 - SITEWORK</b>		
02050	DEMOLITION	36
02100	SITE PREPARATION	38
02220	EXCAVATING, BACKFILLING AND COMPACTING	39
<b>DIVISION 3 - CONCRETE</b>		
03100	CONCRETE FORMWORK	45
03200	CONCRETE REINFORCEMENT	49
03300	CAST-IN-PLACE CONCRETE	51
03346	CONCRETE FLOOR FINISHING	55
03370	CONCRETE CURING	57
<b>DIVISION 5 - METALS</b>		
05500	METAL FABRICATIONS	59
<b>DIVISION 7 – THERMAL AND MOISTURE PROTECTION</b>		
07900	JOINT SEALERS	61
<b>DIVISION 9 - FINISHES</b>		
09900	PAINTING	64
ANNUAL WAGE ORDER #17 COOPER COUNTY DRAWINGS		

**"EXCESSIVE UNEMPLOYMENT IS IN EFFECT"** During times of high unemployment, state law permits the Department's Division of Labor Standards to declare that excessive unemployment is in effect, allowing only workers from certain states to work on the Missouri's public works projects. Public works projects are construction projects funded wholly or partially from public funds, or are projects that benefit the public such as but not limited to schools, parks, fire houses, and government buildings. The excessive unemployment law does not apply to projects funded in part by Federal Funds.

Restrictive states have laws in place restricting Missouri workers to work on their public works projects. Workers from these states are also not allowed to work on Missouri's public works projects.

Only Missouri laborers and laborers from nonrestrictive states are allowed by law to be employed on Missouri's public works projects when the unemployment rate exceeds **5 percent** for two consecutive months. (**See Sections 290.550 through 290.580 RSMo**). To file a complaint against a contractor for employing a worker from one of the restrictive states below on a Missouri public works project, submit the **complaint form** online for the Division to investigate.

**Restrictive states-** workers from these states are **NOT** allowed to be employed on Missouri public works projects: Alaska, Arizona, California, Colorado, Connecticut, Delaware, District of Columbia, Florida, Idaho, Illinois, Iowa, Maine, Massachusetts, Mississippi, Montana, Nevada, New Jersey, North Dakota, South Dakota, and the U.S. Virgin Islands, West Virginia and Wyoming.

**Non-Restrictive States-** workers from these states are allowed to be employed on Missouri public works projects: Alabama, Arkansas, Georgia, Hawaii, Indiana, Kansas, Kentucky, Louisiana, Maryland, Michigan, Minnesota, Nebraska, New Hampshire, New Mexico, New York, North Carolina, Ohio, Oklahoma, Oregon, Pennsylvania, Rhode Island, South Carolina, Tennessee, Texas, Utah, Vermont, Virginia, Washington and Wisconsin.

## **FINAL CHECKLIST BEFORE SUBMITTING PROPOSAL**

- \_\_\_\_1. Complete the Bid Form by filling in the total dollar amount of the bid; listing any addenda which may have been issued; filling in the dollar amount of the bidder's check or Bid Bond, sign the proper signature line, and supply the required information in connection with the signature for the individual bidder, joint adventurer, or corporation.
- \_\_\_\_2. Submit Bid Bond executed by the bidder and surety. Bidders are required to use the Bid Bond furnished by the Commission or attach cashier's check to Bid Bond form. Personal checks are not accepted.
- \_\_\_\_3. Complete Subcontractor section by listing major subcontractor(s) and general supervisor(s), sign as required.
- \_\_\_\_4. Complete Vendor Information and Preference Certification Form.
- \_\_\_\_5. If addenda(s) are issued attach to the back of the bid package. Copy addenda and add to the appropriate section of the orange bound Request for Proposal and retain for your records.

## **NEWSPAPER ADVERTISEMENT**

### **Notice to Contractors**

MoDOT will receive bids at its General Services-Facilities section, 830 MoDOT Drive, Jefferson City, MO until July 6, 2011 at 3:00 P.M. local time for constructing Boonville Rest Area Sidewalks. Contact Lynn Ferguson at 573-751-4879 or [Lynn.Ferguson@modot.mo.gov](mailto:Lynn.Ferguson@modot.mo.gov) to obtain plans, forms, and information or download them at no charge from [http://contribute.modot.mo.gov/business/contractor\\_resources/FacilitiesConstructionandMaintenance.htm](http://contribute.modot.mo.gov/business/contractor_resources/FacilitiesConstructionandMaintenance.htm). A pre-bid conference is scheduled for 10:00 AM, June 27, 2011 at the MoDOT Maintenance Facility, Rt. 5, 0.3 Mi. S of I-70, Boonville, MO.

00020

**INVITATION TO BID**

Notice is given hereby that the Missouri Department of Transportation will accept bids for construction of the project marked **"9-110706 - Rest Area Sidewalks, Boonville"**, according to Drawings and Specifications, and described in general as:

**Remove existing sidewalks and replace with 6'-0" wide x 4" deep concrete sidewalks with incidental site work at the Eastbound and Westbound Rest Areas.**

Sealed bids will be received by the Missouri Department of Transportation at its Central Office, 830 MoDOT Drive, PO Box 270, Jefferson City, MO 65102-0270 until 3:00 P.M., July 6, 2011.

Bids will be opened and read aloud at that time and that place. Bids received after that time will not be accepted.

Contact Lynn Ferguson at 573-751-4879 or [Lynn.Ferguson@modot.mo.gov](mailto:Lynn.Ferguson@modot.mo.gov) to obtain plans, forms, and information or download them at no charge from <http://www.modot.mo.gov/gsbidding/>.

Prevailing wages as established by the Missouri Department of Labor and Industrial Relations, for **Cooper County**, as shown herein will apply.

Bid securities in the amount of 5% of the bid will be required to accompany bids.

Bids must be made on forms provided by the Commission. The Commission reserves the right to reject any or all bids and to waive irregularity in the bids and the bidding. No bid may be amended or withdrawn after the bid is opened.

**Project Location: Missouri Department of Transportation, Rest Area at the 104 mile markers along I-70, Boonville, Missouri.**

**A pre-bid conference is scheduled for 10:00 AM, June 27, 2011 at the MoDOT Maintenance Facility, Rt. 5, 0.3 Mi. S of I-70, Boonville, MO.**

**BIDDER REQUIREMENTS**

1. SCOPE OF WORK

**Remove existing sidewalks and replace with 6'-0" wide x 4" deep concrete sidewalks with incidental site work at the Eastbound and Westbound Rest Areas.**

2. BID INSTRUCTIONS

In order to receive consideration, bids must be made in strict accordance with the following.

- A. Make bids, upon the forms provided herein, properly signed and with all items filled out. Do not change the wording of the bid form and do not add words to the bid form. Unauthorized conditions, limitations or provisions attached to the bid will be cause for rejection of the bid.
- B. No telegraphic bid or telegraphic modification of a bid will be considered. No bids received after the time fixed for receiving them will be considered. Late bids will be returned to the bidder unopened.
- C. Address bids to the Missouri Department of Transportation, and deliver to the address given in the Invitation for Bid, on or before the day and hour set for opening the bids. Enclose each bid in a sealed envelope bearing the title of the Work, the name of the bidder, and the date and hour of the bid opening. Submit only the original signed copy of the bid. It is the sole responsibility of the bidder to see that the bid is received on time.

3. BONDS

- A. Each proposal shall be accompanied by a Bid Bond, Certified Check, Cashier's Check or Bank Money Order payable to the Director of Revenue – Credit State Road Fund for an amount equal to Five Percent (5%) of the amount of the BID submitted. This is to act as a guarantee that the bidder, if awarded the contract, will furnish an acceptable performance and payment bond (Contract Bond) or a cashier's check, a bank money order or a certified check made payable to "Director of Revenue – Credit State Road Fund" in an amount equal to One Hundred (100%) of the contract price.
- B. If a BID BOND is used (in lieu of a certified check, cashier's check, or bank money order), it must be in the form provided and executed by the bidder as principal and by a surety company authorized to do business in the State of Missouri as surety. The agent executing the same on behalf of the surety company must attach a current Power of Attorney setting forth his authority to execute the bond involved.
- C. Certified Checks, Cashier's Checks or Bank Money Orders of unsuccessful bidders will be returned as soon as the award is made. The checks or bank money orders of the successful bidder(s) will be retained until the contract is executed and a satisfactory Performance and Payment (Contract Bond) is furnished. Bid Bonds will not be returned except on specific request of the bidder.

4. INVOICING AND PAYMENT

- A. MoDOT is exempt from paying Missouri Sales Tax, Missouri Use Tax and Federal Excise Tax. However, the successful bidder to whom the contract is awarded, (hereinafter, "contractor") may themselves be responsible for the payment of taxes on materials they purchase to fulfill the contract. A Project Tax Exemption Certificate will be furnished to the successful bidder upon request if applicable.
- B. Each invoice should be itemized in accordance with items listed on the contract in accordance with Section 01019, Contract Considerations, Applications for Payment provisions. Failure to comply with this requirement may delay processing of invoices for payment.
- C. Unless otherwise provided for in the solicitation documents, payment for all equipment, supplies, and/or services required herein shall be made in arrears. The Commission shall not make any advance deposits.
- D. The Commission assumes no obligation for equipment, supplies, and/or services shipped or provided in excess of the quantity ordered. Any authorized quantity is subject to the Commission's rejection and shall be returned at the Contractor's expense.
- E. The Commission reserves the right to purchase goods and services using the state-purchasing card.

5. EXAMINATION OF DOCUMENTS AND SITE OF WORK

- A. Before submitting a bid, each bidder shall examine the Drawings carefully, read the Specifications and all other proposed Contract Documents, and visit the site of the work. Each bidder shall fully inform themselves, prior to bidding, as to existing conditions and limitations under which the Work is to be performed and shall include in his bid a sum to cover the cost of items necessary to perform the Work, as set forth in the proposed Contract Documents. No allowance will be made to a bidder because of lack of such examination or knowledge. The submission of a bid will be considered conclusive evidence that the bidder has made such examination.
- B. The contract price shall include any necessary permits and licenses required by law incidental to the work. Local ordinances requiring building permits are not applicable to the state. Contractor will comply with local laws involving safety in the prosecution of the work.

6. INTERPRETATION

No oral interpretations will be made to any bidder as to the meaning of the plans and specifications or the acceptability of alternate products, materials, form or type of construction. Every request for interpretation shall be made in writing and submitted with all supporting documents not less than ten (10) days before opening of bids. The request shall be sent directly to the Senior Facilities Designer. Every interpretation made to a bidder will be in the form of an addendum and will be sent as promptly as is practicable to all persons to whom plans and specifications have been issued. All such addenda shall become part of the contract documents.

7. PROOF OF COMPETENCY OF BIDDER

A bidder may be required to furnish evidence, satisfactory to the Commission, that he and his proposed subcontractor(s) have sufficient means and experience in the types of work called for to assure completion of the Contract in a satisfactory manner.

8. WITHDRAWAL OF BIDS

After the bid/proposal opening, a vendor may be permitted to withdraw a bid/proposal prior to award at the sole discretion of the division if there is a verifiable error in the bid/proposal and enforcement of the bid would impose an unconscionable hardship on the vendor. This withdrawal will be considered only after receipt of a written request and supporting documentation from the vendor. Withdrawal shall be the vendor's sole remedy for an error other than an obvious clerical error. Withdrawal of a bid/proposal may result in forfeiture of the bid/proposal bond.

9. AWARD OR REJECTION OF BIDS

- A. The Contract, if awarded, will be made on an "All or None" basis using the "lowest and best" principle of award, subject to the Commission's right to reject any or all bids and to waive informality and irregularity in the bids and in the bidding.

10. CONTRACT DOCUMENTS

- A. By submitting a bid, the bidder agrees to furnish any and all equipment, supplies and/or construction services specified in the solicitation documents, at the price(s) stated in their bid, pursuant to all requirements and specifications contained therein.
- B. A binding contract, contract documents, shall consist of: (1) the solicitation documents with any drawings and/or attachment/exhibits, amendments thereto, and/or Best and Final Offer (BAFO) request(s) with any changes/additions, (2) the Contractor's submitted pricing, and (3) the Commission's acceptance of the bid by purchase order or post-award contract.
- C. A notice of award does not constitute an authorization for shipment of equipment or supplies or a directive to proceed with services. Before providing equipment, supplies and/or services, the Contractor must receive a properly authorized purchase order and/or notice to proceed.
- D. The contract expresses the complete agreement of the parties and performance shall be governed solely by the specifications and requirements contained therein. Any change, whether by modification and/or supplementation, must be accomplished by a formal contract amendment signed and approved by and between the duly authorized representative of the Contractor and the duly authorized representative of the Commission, by a modified purchase order prior to the effective date of such modification. The Contractor expressly and explicitly understands and agrees

that no other method and/or no other document, including correspondence, acts, and oral communications by or from any person, shall be used or construed as an amendment or modification.

- E. Failure to execute the contract and file acceptable performance payment (Contract Bond) or cashier's check, bank money order or certified check within after the contract has been mailed to the bidder shall be just cause for the cancellation of the award and the forfeiture of the proposal guaranty. Award may then be made to the next lowest responsible bidder, or the work may be re-advertised and performed under contract or otherwise, as the Commission may decide. No contract shall be considered effective until it has been executed by all parties thereto.

## 11. NONDISCRIMINATION

- A. The Contractor shall comply with the Regulations relative to nondiscrimination in federally-assisted programs of the Department of Transportation, Title 49, Code of Federal Regulations, Part 21, as they may be amended from time to time, (hereinafter referred to as the Regulations), which are herein incorporated by reference and made a part of this contract.
- B. All solicitations either by competitive bidding or negotiation made by the Contractor for work to be performed under a subcontract, including procurements of materials or leases of the Contractor's obligations under this contract and the Regulations, will be relative to nondiscrimination on the grounds of race, color, or national origin.
- C. Sanctions for Noncompliance: In the event of the Contractor's noncompliance with the nondiscrimination provisions of this contract, MoDOT shall impose such contract sanctions as it or the Federal Highway Administration may determine to be appropriate, including, but not limited to: (i) withholding of payments to the Contractor under the contract until the Contractor complies, and/or, (ii) cancellation, termination or suspension of the contract, in whole or in part.

## 12. SUBMITTALS

Review of Submittals. The Architect/Engineer/Designer review of submittals is only for the limited purpose of checking for conformance with information given and seeing if they conform to design intent. The General Services Facilities Manager is not responsible for determining the accuracy of measurements and completeness of details, for verifying quantities, or for checking fabrication or installation procedures. The General Services Facilities Manager's review does not relieve the contractor of his or her responsibilities under the contract documents. The submittal process shall be carried out as outlined in Section 01300, Submittals.

## 13. WORK QUALITY

- A. Inspection of Work. The General Services Facility Operations Supervisor or designated representative shall be permitted to inspect all work, materials, payrolls, records of personnel, invoices of materials, and other data and records relating to the work. If requested by the General Services-Facility Operations Supervisor or designated representative, the contractor shall at any time before final acceptance of the work uncovers any portion of the finished work as directed for inspection. After examination, the contractor shall restore said portions of the work to the standards required by the contract. Should the work thus exposed and examined prove acceptable, the actual cost of uncovering, removing and replacing shall be paid by the Commission. Should the work so exposed and examined prove unacceptable, the uncovering, removing and replacing shall be at the expense of the contractor.
- B. Defective Work. All work which has been rejected shall be remedied, or if necessary, removed and replaced in an acceptable manner by the contractor at its expense. If the contractor fails to remedy or replace such defective work immediately after receiving written notice from the General Services-Facility Operations Supervisor or designated representative, the Commission may employ labor to correct the defective work, and the cost incurred in making such corrections shall be deducted from the payment due or to become due the contractor under this contract.
- C. Contractor will provide a one-year warranty for parts and labor on all building material, and equipment or a standard manufacturer's warranty which ever is greater. All warranties, including extended service agreements shall begin on the date of Final Acceptance of this project.
- D. Contractor's Responsibility for Work. Until the General Services-Facility Operations Supervisor or designated representative, accepts the work, it shall be in the custody and under the charge and care of the contractor. Contractor shall rebuild, repair, restore or make good at its own expense any lost or stolen Commission-owned material and all injuries or damages to any portion of the work caused by action of the elements or from any other reason before its completion and final acceptance. Issuance of a payment estimate on any part of the work done will not be considered as

final acceptance of any work completed up to that time.

- E. Preservation of Utilities and Monuments. The contractor shall be responsible for the preservation of all public and private utilities, wires, lines, pipes, poles, cables, and conduit at the site of the work and shall use every precaution necessary to prevent damage or injury thereto. The contractor shall not disturb or damage any land monument or property landmark until an authorized agent has witnessed or otherwise referenced, their location and shall not remove them until directed by General Services Facilities Manager.
- F. Cooperation with Other Contractors. The contractor shall arrange its work so as not to interfere with the operations of other contractors of the Commission which might be engaged in performing adjacent or nearby work. Whenever work being done by other contractors is contiguous or related to the work involved in this contract, the respective rights of the various contractors will be determined by the General Services-Facility Operations Supervisor or designated representative in order to secure the completion of the work under all contracts in general harmony.
- G. The contractor will be required to remove from the Commission's property all debris.
- H. Temporary Suspension of Work. The General Services-Facility Operations Supervisor or designated representative shall have authority to suspend work, wholly or in part, for such period or periods of time as he may deem necessary when weather or other conditions are such that in the opinion of the General Services-Facility Operations Supervisor or designated representative the work may be done at a later time with advantage to the Commission or for failure on the part of the contractor to comply with any of the provisions of the contract. The contractor may suspend work for reasonable cause with written approval of the General Services-Facility Operations Supervisor or designated representative. Liquidated damages shall not accrue during the period in which work is suspended with the approval of the General Services-Facility Operations Supervisor or designated representative, however, if the suspension is because of the contractor's failure to comply to any of the provisions of the contract, the contractor shall not be entitled to an extension of completion time nor to a waiver of liquidated damages. In the event work is suspended, the contractor shall store all materials in a manner that will protect them from damage, and shall take every precaution to prevent damage or deterioration of, the portions of the work completed. If work has been discontinued for any reason, the contractor shall give the General Services-Facility Operations Supervisor or designated representative written notice at least forty-eight (48) hours before resuming operations.

#### 14. CHANGE ORDERS

- A. General. All departures from the plans and specifications will be considered unauthorized unless, before proceeding with the work, the contractor has had delivered to it a change order, signed by the General Services-Facility Operations Supervisor or designated representative, authorizing and directing such changes or departures. All unauthorized work shall be at the contractor's expense and the General Services-Facility Operations Supervisor or designated representative may order such unauthorized work removed and replaced at the contractor's expense.
- B. Overhead and Profit on Change Orders. The percentages for overhead and profit charged on Change Orders and Field Work Authorizations shall be negotiated and may vary according to the nature, extent and complexity of the work involved. However, the overhead and profit for the contractor or subcontractor actually performing the work shall not exceed 15%. When one or more tiers of subcontractors are used, in no event shall any contractor or subcontractor receive as overhead and profit more than 7% of the cost of the work performed by any of his subcontractors. In no case shall the total overhead and profit paid by the owner on any change order exceed twenty five percent (25%) of the cost of materials, labor and equipment necessary to put the change order work in place.
- C. Contractor's Procedure for Claims. If the contractor considers additional compensation may be due for work or material not clearly covered in the contract or ordered in writing by the General Services-Facility Operations Supervisor or designated representative as extra work, or if additional compensation may be requested beyond the scope of such provisions, the contractor shall notify the General Services-Facility Operations Supervisor or designated representative in writing of the intention to make a claim before beginning the work in question. If notification is not given and the General Services-Facility Operations Supervisor or designated representative is not afforded proper facilities by contractor to provide necessary inspection and for keeping strict account of actual cost, the contractor agrees to waive any claims for additional compensation. Notice by the contractor, and the fact that the General Services-Facility Operations Supervisor or designated representative has kept account of the cost shall not be construed as substantiating the validity of the claim. The contractor shall file a written notice of claim for additional compensation in triplicate within 60 days after completing the work in question.

- a. If the claim is against the Commission, the notice of claim shall be personally delivered, or sent by certified mail to the office of the Secretary of the Commission in Jefferson City, Missouri. All notices of claims shall contain an itemized statement showing completely and fully the items and amounts forming the basis of the claim.
- b. Any claim or an item of any claim, not included in the notice and statement, or any claim included but not clearly defined and specifically set out and itemized or any claim not filed within the time and in the manner provided, shall be forever waived and shall neither constitute the basis of nor be included in any legal action, counterclaim, set-off, or arbitration.
- c. All claims filed with Missouri Highway and Transportation Commission's Secretary will be forwarded to the Missouri Department of Transportation's Claims Committee.

15. INSURANCE

- A. The Contractor shall maintain or cause to be maintained at Contractor's own expense commercial general liability, automobile liability, and worker's compensation insurance against negligent acts, errors or omissions of the Contractor, or its subcontractors and anyone directly or indirectly employed by any of them. Any insurance policy required as specified in this Section shall be written by a company that is licensed and authorized to issue such insurance in the state of Missouri and shall provide insurance coverage for not less than the following limits of liability:
  - a. General Liability: Not less than \$500,000 for any one person in a single accident or occurrence, and not less than \$3,000,000 for all claims arising out of a single occurrence;
  - b. Automobile Liability: Not less than \$500,000 for any one person in a single accident or occurrence, and not less than \$3,000,000 for all claims arising out of a single occurrence;
  - c. Missouri State Workmen's Compensation policy or equivalent in accordance with state law.
  - d. Upon request from the Commission, the Contractor shall provide the Commission with certificates of insurance evidencing the required coverage and that such insurance is in effect.

16. CONSTRUCTION TIME AND LIQUIDATED DAMAGES

- A. Time of Completion - If this bid is accepted, it is hereby agreed that work will begin no later than the date specified in the "Notice to Proceed" and will diligently be prosecuted in order to complete the work and billing within **30-working days** from the date specified. Completion of work will be based on FINAL ACCEPTANCE of the building; "SUBSTANTIAL COMPLETION" will not be accepted as basis for completion.
- B. Liquidated Damages - In the event the successful Contractor fails to deliver the material within the time specified, the Department and the public will sustain damages because of such delay in delivery, the exact extent of which would be difficult to ascertain, and in order to liquidate such damage in advance it is agreed that the sum of three-hundred dollars (\$300.00) per day, per item, for each assessable calendar day on which the delivery has not been completed, is reasonable and the best estimate which the parties can arrive at as liquidated damages, and it is therefore agreed that said amount will be withheld from payments due the Contractor or otherwise collected from the Contractor as liquidated damages. Saturdays, Sundays, holidays and days whereas the Department has suspended work shall not be assessable days.
- C. A working day. Is defined as any day when, soil and weather conditions would permit the major operation of the project for six hours or more unless other unavoidable conditions prevent the contractor's operation. If conditions require the contractor to stop work in less than six hours, the day will not be counted as a working day. Working days will begin as soon as notice to proceed is issued. In order for MoDOT not to change a workday due to unavoidable conditions, the contractor must have enough forces, equipment, and materials on site to begin the project. The contractor must notify MoDOT inspector before 12:00 noon of said working day if forces will not be present.

17. EXECUTIVE ORDER

- A. "By signing this Agreement, the Contractor hereby certifies that any employee of the Contractor assigned to perform services under the contract is eligible and authorized to work in the United States in compliance with federal law."
- B. In the event the Contractor fails to comply with the provisions of the Executive Order 07-13, or in the event the Commission has reasonable cause to believe that the contractor has knowingly employed individuals who are not eligible to work in the United States in violation of federal law, the Commission reserves the right to impose such contract sanctions as it may determine to be appropriate, including but not limited to contract cancellation, termination or suspension in whole or in part or both.
- C. The Contractor shall include the provisions of this paragraph in every subcontract. The Contractor shall take such action with respect to any subcontract as the Commission may direct as a means of enforcing such provisions, including sanctions for noncompliance.

18. Missouri law, 292.675 RSMo, requires the Contractor and its subcontractor(s) to provide a ten-hour occupational safety and health administration (OSHA) construction safety program (or a similar program approved by the Missouri Department of Labor and Industrial Relations as a qualified substitute) for their on-site employees (laborers, workmen, drivers, equipment operators, and craftsmen) who have not previously completed such a program and are directly engaged in actual construction of the improvement (or working at a nearby or adjacent facility used for construction of the improvement). The Contractor and its subcontractor(s) shall require all such employees to complete this ten-hour program, pursuant to 292.675 RSMo, unless they hold documentation on their prior completion of said program. Penalties for non-compliance include Contractor forfeiture to the Commission in the amount of \$2,500, plus \$100 per contractor and subcontractor employee for each calendar day such employee is employed beyond the elapsed time period for required program completion under 292.675 RSMo.

19. EMPLOYMENT OF UNAUTHORIZED ALIENS

- A. Pursuant to RSMo 285.530 (1), no business entity or employer shall knowingly employ, hire for employment, or continue to employ an unauthorized alien to perform work within the state of Missouri. As a condition for the award of any contract or grant in excess of five thousand dollars by the state or by any political subdivision of the state to a business entity, or for any business entity receiving a state-administered or subsidized tax credit, tax abatement, or loan from the state, the business entity shall, by sworn affidavit and provision of documentation, affirm its enrollment and participation in a federal work authorization program with respect to the employees working in connection with the contracted services. Every such business entity shall sign an affidavit affirming that it does not knowingly employ any person who is unauthorized alien in connection with the contracted services. [RSMO 285.530 (2)] A copy of the affidavit referenced above is provided within this document.
- B. E-Verify is an example of a federal work authorization program. Acceptable enrollment and participation documentation consists of **completed** copy of the E-Verify Memorandum of Understanding (MOU). For vendors that are not already enrolled and participating in a federal work authorization program, E-Verify is available at [http://www.dhs.gov/files/programs/gc\\_1185221678150.shtm](http://www.dhs.gov/files/programs/gc_1185221678150.shtm).

20. PERFORMANCE

- A. In the evaluation of bids/quotes, preferences shall be applied in accordance with 7 CSR 10-11.020(7). Contractors should apply the same preferences in selecting subcontractors. The attached document entitled "**VENDOR INFORMATION AND PREFERENCE CERTIFICATION FORM**" must be completed and returned with the solicitation documents.
- B. Bidders are encouraged to obtain minority business enterprise (MBE) and women business enterprise (WBE) participation in this work through the use of subcontractors, suppliers, joint ventures, or other arrangements that afford meaningful participation for M/WBEs. Bidders are encouraged to obtain 10% MBE and 5% WBE participation.

21. GENERAL PERFORMANCE

- A. Bidders are encouraged to obtain minority business enterprise (MBE) and women business enterprise (WBE) participation in this work through the use of subcontractors, suppliers, joint ventures, or other arrangements that afford meaningful participation for M/WBEs. Bidders are encouraged to obtain 10% MBE and 5% WBE participation.

- B. This work is to be performed under the general supervision and direction of the Missouri Department of Transportation (MoDOT) and, if awarded any portion of the work, the Contractor agrees to furnish at his own expense all labor and equipment required to complete the work, it being expressly understood that this solicitation is for completed work based upon the price(s) specified and is not a solicitation for rental of equipment or employment of labor by MoDOT, and MoDOT is to have no direction or control over the employees used by the Contractor in performance of the work.

22. APPLICABLE LAWS AND REGULATIONS

- A. The contract shall be construed according to the laws of the State of Missouri. The Contractor shall comply with all local, state, and federal laws and regulations related to the performance of the contract.
- B. The Contractor must be registered and maintain good standing with the Secretary of State of the State of Missouri and other regulatory agencies, as may be required by law or regulations. Prior to the issuance of a purchase order and/or notice to proceed, the Contractor may be required to submit to MoDOT a copy of their current Authority Certificate from the Secretary of State of the State of Missouri.
  - 1) Prior to the issuance of a purchase order and/or notice to proceed, all out-of-state Contractors providing services within the state of Missouri must submit to MoDOT a copy of their current Transient Employer Certificate from the Department of Revenue, in addition to a copy of their current Authority Certificate from the Secretary of State of the State of Missouri.
- C. The exclusive venue for any legal proceeding relating to or arising, out of the contract shall be in the Circuit Court of Cole County, Missouri.

23. PREVAILING WAGE

- A. The work to be performed under this solicitation is governed by the provisions of Chapter 290 RSMo, as amended, related to prevailing wages to be paid on public works.
- B. If the bid is accepted, the vendor will be required to comply with the prevailing wages as fixed by the Missouri Department of Labor and Industrial Relations, in effect as of the date of the issuance of the solicitation, for each affected craft and type of workmen in **Cooper County**. The Annual Wage Order #18 is attached to the bid documents.
- C. Pursuant to the requirements of the Chapter 290 RSMo., not less than the prevailing hourly rate of wages, as set out in the wage order attached to and made part of the specification for work under the contract, must be paid to all workers performing work under the contract.
- D. The Contractor shall provide all information, reports and other documentation as required by MHTC to ensure compliance with Chapter 290 RSMo., as amended, relating to prevailing wages to be paid on public works.

24. REMEDIES AND RIGHTS

- A. No provision in the contract shall be construed, expressly or implied, as a waiver by the MHTC of any existing or future right and/or remedy available by law in the event of any claim by the MHTC of the Contractor's default or breach of contract.
- B. The Contractor agrees and understands that the contract shall constitute an assignment by the Contractor to the MHTC of all rights, title and interest in and to all causes of action that the Contractor may have under the antitrust laws of the United States or State of Missouri for which causes of action have accrued or will accrue as the result of or in relation to the particular equipment, supplies, and/or services purchased or produced by the Contractor in the fulfillment of the contract with the MHTC.
- C. In the event a Contractor becomes involved in, or is threatened with, litigation with a subcontractor or supplier as a result of such direction, the Contractor may request MoDOT to enter into such litigation to protect the interests of the MHTC, and, in addition, the Contractor may request the United States to enter into such litigation to protect the interests of the United States.

25. CANCELLATION OF CONTRACT

The MHTC may cancel the contract at any time for a material breach of contractual obligations or for convenience by providing the Contractor with written notice of cancellation. Should the MHTC exercise its right to cancel the contract for such reasons, cancellation will become effective upon the date specified in the notice of cancellation sent to the Contractor.

26. BANKRUPTCY OR INSOLVENCY

Upon filing for any bankruptcy or insolvency proceeding by or against the Contractor, whether voluntary or involuntary, or upon the appointment of a receiver, trustee, or assigned the benefit or creditors, the Contractor must notify MoDOT immediately. Upon learning of any such actions, the MHTC reserves the right, at its sole discretion, to either cancel the contract or affirm the contract and hold the contractor responsible for damages. Inventions, Patents, and Copyrights

27. INVENTIONS, PATENTS, AND COPYRIGHTS

The Contractor shall defend, protect, and hold harmless the MHTC, its officers, agents, and employees against all suits of law or in equity resulting from patent and copyright infringement concerning the Contractor's performance or products produced under the terms of the contract.

28. INSPECTION AND ACCEPTANCE

- A. No equipment, supplies, and/or services received by MoDOT pursuant to a contract shall be deemed accepted until MoDOT has had reasonable opportunity to inspect said equipment, supplies, and/or services.
- B. All equipment, supplies, and/or services which do not comply with the specifications and/or requirements or which are otherwise unacceptable or defective may be rejected. In addition, all equipment, supplies, and/or services which are discovered to be defective or which do not conform to any warranty of the Contractor upon inspection (or at any later time if the defects contained were not reasonably ascertainable upon the initial inspection) may be rejected.
- C. The MHTC reserves the right to return any such rejected shipment at the Contractor's expense for full credit or replacement and to specify a reasonable date by which replacements must be received.
- D. The MHTC's right to reject any unacceptable equipment, supplies, and/or services shall not exclude any other legal, equitable or contractual remedies the MHTC may have.

29. STATUS OF INDEPENDENT CONTRACTOR

The Contractor represents itself to be an independent Contractor offering such services to the general public and shall not represent itself or its employees to be an employee of the MHTC. Therefore, the Contractor shall assume all legal and financial responsibility for taxes, FICA, employee fringe benefits, workers' compensation, employee insurance, minimum wage requirements, overtime, etc., and agrees to indemnify, save and hold the MHTC, its officers, agents and employees harmless from and against any and all losses (including attorney fees) and damage of any kind related to such matters.

30. INDEMNIFICATION

The Offeror shall defend, indemnify and hold harmless the Commission, including its members and department employees, from any claim or liability whether based on a claim for damages to real or personal property or to a person for any matter relating to or arising out of the Offeror's performance of its obligations under this Agreement.

31. DEFINITIONS

Architect/Engineer/Designer: When the term "Architect or Engineer or Designer" is used herein, it shall refer to Larry Carver (573) 526-7934 or Doug Record [General Services Manager - Facilities] Missouri Department of Transportation, General Services (573) 526-7937, FAX (573) 526-6948. MoDOT Inspector or Facility Operations Supervisor: When the term "MoDOT Inspector or Facility Operations Supervisor" is used herein, it shall refer to those MoDOT individuals authorized to perform site inspections by Paul Loftin, [Facility Operations Supervisor] District, General Services Division. Owner: When the term "Owner" is used herein, it shall refer to Missouri Department of Transportation (MoDOT).

# VENDOR INFORMATION & PREFERENCE CERTIFICATION FORM

## Vendor Information

**All bidders must furnish ALL applicable information requested below**

<b>Vendor Name/Mailing Address:</b>  Email Address:	<b>Vendor Contact Information (including area codes):</b>  <b>Phone #:</b>  Cellular #: Fax #:									
<b>Printed Name of Responsible Officer or Employee:</b>	<b>Signature:</b>									
<b>For Corporations</b> - State in which incorporated:	<b>For Others</b> - State of domicile:									
If the address listed in the Vendor Name/Mailing Address block above is not located in the State of Missouri, list the address of Missouri offices or places of business:  If additional space is required, please attach an additional sheet and identify it as <b><u>Addresses of Missouri Offices or Places of Business.</u></b>										
<b>M/WBE INFORMATION:</b> List all certified Minority or Women Business Enterprises ( <b><u>M/WBE</u></b> ) utilized in the fulfillment of this bid. Include percentages for subcontractors and identify the M/WBE certifying agency: <table style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: center; border-bottom: 1px solid black;"><u>M/WBE Name</u></th> <th style="text-align: center; border-bottom: 1px solid black;"><u>Percentage of Contract</u></th> <th style="text-align: center; border-bottom: 1px solid black;"><u>M/WBE Certifying Agency</u></th> </tr> </thead> <tbody> <tr> <td style="border-bottom: 1px solid black;"> </td> <td style="border-bottom: 1px solid black;"> </td> <td style="border-bottom: 1px solid black;"> </td> </tr> <tr> <td style="border-bottom: 1px solid black;"> </td> <td style="border-bottom: 1px solid black;"> </td> <td style="border-bottom: 1px solid black;"> </td> </tr> </tbody> </table> If additional space is required, please attach an additional sheet and identify it as <b><u>M/WBE Information</u></b>		<u>M/WBE Name</u>	<u>Percentage of Contract</u>	<u>M/WBE Certifying Agency</u>						
<u>M/WBE Name</u>	<u>Percentage of Contract</u>	<u>M/WBE Certifying Agency</u>								

## Preference Certification

**All bidders must furnish ALL applicable information requested below**

<b><u>GOODS/PRODUCTS MANUFACTURED OR PRODUCED IN USA:</u></b> If any or all of the goods or products offered in the attached bid which the bidder proposes to supply to the MHTC are <b><u>not</u></b> manufactured or produced in the "United States", or imported in accordance with a qualifying treaty, law, agreement, or regulation, list below, by item or item number, the country other than the United States where each good or product is manufactured or produced.	
Item (or item number)	Location Where Item is Manufactured or Produced
If additional space is required, please attach an additional sheet and identify it as <b><u>Location Products are Manufactured or Produced.</u></b>	
<b><u>MISSOURI SERVICE-DISABLED VETERAN BUSINESS:</u></b> Please complete the following if applicable. Additional information may be requested if preference is applicable. See below definitions for qualification criteria:	
<b>Service-Disabled Veteran</b> is defined as any individual who is disabled as certified by the appropriate federal agency responsible for the administration of veterans' affairs.	
<b>Service-Disabled Veteran Business</b> is defined as a business concern:	
a. Not less than fifty-one (51) percent of which is owned by one or more service-disabled veterans or, in the case of any publicly owned business, not less than fifty-one (51) percent of the stock of which is owned by one or more service-disabled veterans; and	
b. The management and daily business operations of which are controlled by one or more service-disabled veterans.	
<u>Veteran Information</u>	<u>Business Information</u>
Service-Disabled Veteran's Name (Please Print)	Service-Disabled Veteran Business Name
Service-Disabled Veteran's Signature	Missouri Address of Service Disabled Veteran Business

00301

**BID FORM**

To: The Missouri Highway and Transportation Commission  
PO Box 270  
Jefferson City, Missouri 65102

1. The undersigned, having examined the proposed Contract Documents titled: **“9-110706 - Rest Area Sidewalks, Boonville”** and having visited the site and examined the conditions affecting the work, hereby proposes and agrees to furnish all labor, materials, equipment and everything which may be necessary or incidental thereto, as proposed by said Contract Documents, all to the satisfaction of the General Services-Facility Operations Supervisor or designated representative of the Missouri Department of Transportation and the Missouri Highway and Transportation Commission, for the stipulated sum of:

\_\_\_\_\_ DOLLARS (\$\_\_\_\_\_)

2. The undersigned, acknowledges having examined and being familiar with the contract documents including the drawings, the Instructions to Bidders, General Conditions, Supplementary Conditions and the body of technical specifications.
3. The undersigned acknowledges receipt of Addenda number \_\_\_\_\_ through \_\_\_\_\_ inclusive.
4. Enclosed with this bid is bid security in the amount of not less than 5% of the bidder's proposed Contract Sum, the amount being \_\_\_\_\_ DOLLARS (\$\_\_\_\_\_).

**IF AN INDIVIDUAL**

\_\_\_\_\_  
Name of individual

\_\_\_\_\_  
Residence address

\_\_\_\_\_  
Social Security Number

\_\_\_\_\_  
Telephone Number

\_\_\_\_\_  
Firm Name, If Any

\_\_\_\_\_  
Address for communications

\_\_\_\_\_  
Signature

**IF A PARTNERSHIP**

\_\_\_\_\_  
Name of Partnership

(State Name and Residence Address of All Partners)

\_\_\_\_\_  
Partner

\_\_\_\_\_  
Residence Address

\_\_\_\_\_  
Partner

\_\_\_\_\_  
Residence Address

\_\_\_\_\_  
Address for Communications

\_\_\_\_\_  
Federal Tax I.D. Number

\_\_\_\_\_  
Telephone Number

\_\_\_\_\_  
Signature of Either Partner

**IF A CORPORATION**

\_\_\_\_\_  
Name of Corporation

Incorporated under the laws of the  
State of \_\_\_\_\_

\_\_\_\_\_  
Name and Title of Officer

Corporate License No. \_\_\_\_\_  
(If a corporation organized in a state other than  
Missouri, attach Certificate of Authority to do  
business in the State of Missouri.)

\_\_\_\_\_  
Signature of officer

\_\_\_\_\_  
Federal Tax I.D. Number

\_\_\_\_\_  
Address for Communications

(ATTEST)

\_\_\_\_\_  
Telephone Number

\_\_\_\_\_  
(SEAL) Secretary

(Each bidder must complete the Bid Form by signing in the proper signature line above and by supplying the required information called for in connection with the signature. The information called for is necessary in the proper preparation of the contract and performance bond.)



00430

**SUBCONTRACTOR LISTING**

1. For portions of Work equaling or exceeding 1% of the total proposed Contract Sum, the undersigned proposes to use the following subcontractors. Except as otherwise approved by the Owner, the undersigned proposes to perform all other portions of the Work with his own forces.

2. Portion of the Work:	Subcontractor name and address:
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____

USE ADDITIONAL SHEETS  
IF REQUIRED

PROVIDE SIGNATURE  
IDENTICAL TO THAT  
SHOWN ON THE BID FORM

BIDDER:  
\_\_\_\_\_  
by \_\_\_\_\_

00600

**BID BOND**

KNOW ALL MEN BY THESE PRESENTS, that we \_\_\_\_\_,  
as Principal, and \_\_\_\_\_,  
as Surety, are held firmly bound unto the State of Missouri (acting by and through the Missouri Highway and  
Transportation Commission) in the penal sum of \_\_\_\_\_ Dollars

(\$ \_\_\_\_\_), to be paid to the State of Missouri, or the Missouri Highway and Transportation  
Commission, to be credited to the State Road Fund and Principal and Surety binding themselves, their heirs,  
executors, administrators, successors and assigns, jointly and severally, firmly by these presents.

Sealed with our seals and dated this \_\_\_\_\_ day of \_\_\_\_\_, 20 \_\_\_\_\_

THE CONDITION OF THIS OBLIGATION is such that:

WHEREAS, the Principal is submitting herewith a bid to the Missouri Highway and Transportation Commission on  
Route(s) \_\_\_\_\_,  
in \_\_\_\_\_ County(ies), Project(s) \_\_\_\_\_,  
for construction or improvement as set out in said proposal.

NOW THEREFORE, if the Missouri Highway and Transportation Commission shall accept the bid of the Principal,  
and if said Principal shall properly execute and deliver to the Missouri Highway and Transportation Commission the  
Contract, Contract Bond, Specifications and evidence of insurance coverage in compliance with the requirements of  
the Proposal, to the satisfaction of the Missouri Highway and Transportation Commission, then this obligation shall  
be void and of no effect, otherwise to remain in full force and effect.

In the event the said Principal shall, in the judgment of the Missouri Highway and Transportation Commission, fail to  
comply with any requirement as set forth in the preceding paragraph, then the State of Missouri, acting through the  
Missouri Highway and Transportation Commission, shall immediately and forthwith be entitled to recover the fees,  
and any other expense of recovery.

\_\_\_\_\_  
Principal Surety

By \_\_\_\_\_  
Attorney in Fact (SEAL)

Attest: (CORPORATE SEAL)

\_\_\_\_\_  
Corporate Secretary

Note: This bond must be executed by the Principal and by a Corporate Surety authorized to conduct  
surety business in the State of Missouri.

**END OF SECTION**

**CONTRACT REQUIREMENTS**

**PART 1 GENERAL**

1.1 SECTION INCLUDES

- A. Schedule of values.
- B. Application for payment.
- C. Change procedures.
- D. Alternatives.

1.2 RELATED SECTIONS

- A. Section 01600 - Material and Equipment: Product substitutions.

1.3 SCHEDULE OF VALUES

- A. Submit a printed schedule on Contractor's standard form. Electronic media printout will be considered.
- B. Submit Schedule of Values in duplicate within 20 days after date of Owner-Contractor Agreement.
- C. Revise schedule to list approved Change Orders, with each Application for Payment.

1.4 APPLICATIONS FOR PAYMENT

- A. Submit four copies of each application on Contractor's electronic media driven form.
- B. Content and Format: Utilize Schedule of Values for listing items in Application for Payment.
- C. Payment Period: 30 days.
- D. Submit waiver of liens from vendors.
- E. Include an updated construction progress schedule.
- F. Certified payroll records.

1.5 CHANGE PROCEDURES

- A. The Architect/Engineer/Designer may issue a Notice of Change that includes a detailed description of a proposed change with supplementary or revised Drawings and specifications, a change in Contract Time for executing the change with a stipulation of any overtime work required.
- B. The Contractor may propose changes by submitting a request for change to the Architect/Engineer/Designer describing the proposed change and its full effect on the Work. Include a statement describing the reason for the change, the effect on the Contract Sum/Price and Contract Time, and a statement describing the effect on Work by the MoDOT District or other Contractors.
- C. Stipulated Sum/Price Change Order: Based on Notice of Change and Contractor's fixed price quotation or Contractor's request for a Change Order as approved by Architect/Engineer/Designer.
- D. Construction Change Directive: Architect/Engineer/Designer may issue a directive instructing the Contractor to proceed with a change in the Work, for subsequent inclusion in a Change Order. Document will describe changes in the Work, and designate method of determining any change in Contract Sum/Price or Contract Time. Promptly execute the change.

- E. Time and Material Change Order: Submit itemized account and supporting data after completion of change, within time limits indicated in the Conditions of the Contract. Architect/Engineer/Designer will determine the change allowable in Contract Sum/Price and Contract Time as provided in the Contract Documents.
- F. Maintain detailed records of work done on Time and Material basis. Provide full information required for evaluation of proposed changes, and to substantiate costs for changes in the Work.
- G. Execution of Change Orders: Architect/Engineer/Designer will issue Change Orders for signatures of parties as provided in the Conditions of the Contract.

1.6 DEFECT ASSESSMENT

- A. Replace the Work, or portions of the Work, not conforming to specify requirements.
- B. If, in the opinion of the Architect/Engineer/Designer, it is not practical to remove and replace the Work, the Architect/Engineer/Designer will direct an appropriate remedy or adjust payment.

1.7 ALTERNATIVES

- A. Accepted Alternatives will be identified in Owner-Contractor Agreement.

**END OF SECTION**

**COORDINATION AND MEETING REQUIREMENT**

**PART 1 GENERAL**

1.1 SECTION INCLUDES

- A. Coordination and project conditions.
- B. Field engineering.
- C. Preconstruction meeting.
- D. Site mobilization meeting.
- E. Progress meetings.
- F. Preinstallation meetings.
- G. Equipment electrical characteristics and components.
- H. Examination.
- I. Preparation.
- J. Cutting and Patching.
- K. Alteration project procedures.

1.2 COORDINATION AND PROJECT CONDITIONS

- A. Coordinate scheduling, submittals, and Work of the various sections of the Project Manual to ensure efficient and orderly sequence of installation of interdependent construction elements.
- B. Verify utility requirements and characteristics of operating equipment are compatible with building utilities. Coordinate work of various sections having interdependent responsibilities for installing, connecting to and placing in service, such equipment.
- C. Coordinate space requirements, supports, and installation of mechanical and electrical Work, which are indicated diagrammatically on Drawings. Follow routing shown for pipes, ducts, and conduit, as closely as practicable; place runs parallel with lines of building. Utilize spaces efficiently to maximize accessibility for other installations, for maintenance, and for repairs.
- D. In finished areas, except as otherwise indicated, conceal pipes, ducts and wiring within the construction. Coordinate locations of fixtures and outlets with finish elements.
- E. Coordinate completion and clean up of Work of separate sections in preparation for Substantial Completion.
- F. After Owner occupancy of premises, coordinate access to site for correction of defective Work and Work not in accordance with Contract Documents, to minimize disruption of Owner's activities.

1.3 FIELD ENGINEERING

- A. Employ a Land Surveyor registered in the State of Missouri and acceptable to Architect/Engineer/Designer.
- B. Owner will locate and protect survey control and reference points.
- C. Control datum for survey is that established by Owner provided survey.
- D. Verify setbacks and easements; confirm drawing dimensions and elevations.
- E. Provide field engineering services. Establish elevations, lines and levels, utilizing recognized engineering survey practices.

1.4 PRECONSTRUCTION MEETING

- A. Architect/Engineer/Designer will schedule a meeting after Notice of Award.

- B. Attendance Required: District engineer or representative, Architect/Engineer/Designer and Contractor.
- C. Record minutes and distribute copies within 5 days after meeting to participants, with two copies to District Engineer, Architect/Engineer/Designer, participants and those affected by decisions made.

#### 1.5 SITE MOBILIZATION MEETING

- A. Architect/Engineer/Designer will schedule a meeting at the Project site prior to Contractor occupancy.
- B. Architect/Engineer/Designer will record minutes and distributes copies within 5 days after meeting to participants, with two copies to Architect/Engineer/Designer, participants and those affected by decisions made.

#### 1.6 PROGRESS MEETINGS

- A. Schedule and administer meetings throughout progress of the Work at when arranged by Architect/Engineer/Designer.
- B. Architect/Engineer/Designer will make arrangements for meetings, prepare agenda with copies for participants, and preside at meetings.
- C. Attendance Required: Job superintendent, major Subcontractors and suppliers, District engineer representative, Architect/Engineer/Designer, as appropriate to agenda topics for each meeting.
- D. Agenda:
  - 1. Review of Work progress.
  - 2. Field observations, problems, and decisions.
  - 3. Identification of problems, which impede planned progress.
  - 4. Maintenance of progress schedule.
  - 5. Corrective measures to regain projected schedules.
  - 6. Coordination of projected progress.
  - 7. Effect of proposed changes on progress schedule and coordination.
- E. Record minutes and distributes copies within 5 days after meeting to participants and those affected by decisions made.

#### 1.7 PREINSTALLATION MEETING

- A. When required in individual specification sections, convene a pre-installation meeting at the site prior to commencing work of the section.
- B. Notify Architect/Engineer/Designer seven days in advance of meeting date.
- C. Prepare agenda and preside at meeting:
  - 1. Review conditions of installation, preparation and installation procedures.
  - 2. Review coordination with related work.
- D. Record minutes and distributes copies within 5 days after meeting to participants and those affected by decisions made.

### **PART 2 PRODUCTS**

Not used

## **PART 3 EXECUTION**

### **3.1 CUTTING AND PATCHING**

- A. Employ skilled and experienced installer to perform cutting and patching.
- B. Submit written request in advance of cutting or altering elements, which affect:
  - 1. Structural integrity of element.
  - 2. Integrity of weather-exposed or moisture-resistant elements.
  - 3. Work of Owner or separate contractor.
- C. Execute cutting, fitting, and patching to complete Work, and to:
  - 1. Uncover Work to install or correct ill-timed Work.
  - 2. Remove and replace defective and non-conforming Work.
  - 3. Provide openings in elements of Work for penetrations of mechanical and electrical Work.
- D. Cut masonry and concrete materials using masonry saw or core drill.
- E. Fit Work tight to pipes, sleeves, ducts, conduit and other penetrations through surfaces.
- F. Maintain integrity of wall, ceiling, or floor construction; completely seal voids.
- G. Refinish surfaces to match adjacent finishes. For continuous surfaces, refinish to nearest intersection; for an assembly, refinish entire unit.
- H. Identify hazardous substances or conditions exposed during the Work to the Architect/Engineer/Designer for decision or remedy.

### **3.2 ALTERATION PROJECT PROCEDURES**

- A. Materials: As specified in Product sections; match existing Products and work for patching and extending work.
- B. Close openings in exterior surfaces to protect existing work from weather and extremes of temperature and humidity.
- C. When finished surfaces are cut so that a smooth transition with new Work is not possible, terminate existing surface along a straight line at a natural line of division and submit recommendation to Architect/Engineer/Designer for review.
- D. Patch or replace portions of existing surfaces that are damaged, lifted, discolored or showing other imperfections.
- E. Finish surfaces as specified in individual Product sections.

**END OF SECTION**

**01300**

**SUBMITTAL REQUIREMENTS**

**PART 1 GENERAL**

1.1 SECTION INCLUDES

- A. Submittal procedures.
- B. Construction progress schedules.
- C. Proposed Products list.
- D. Product Data.
- E. Shop Drawings.
- F. Samples.
- G. Design data.
- H. Test reports.
- I. Certificates.
- J. Manufacturer's instructions.
- K. Manufacturer's field reports.
- L. Erection drawings.
- M. Construction photographs.

1.2 RELATED SECTIONS

- A. Section 01300 - Submittals
- B. Section 01400 - Quality Control: Manufacturers' field services and reports.
- C. Section 01700 - Contract Closeout: Contract warranties, bonds, manufacturers' certificates and closeout submittals.

1.3 REFERENCES

- A. AGC Associated General Contractors of America publication "The Use of CPM in Construction - A Manual for General Contractors and the Construction Industry".

1.4 SUBMITTAL PROCEDURES

- A. Transmit each submittal with Architect/Engineer/Designer accepted form.
- B. Identify Project, Contractor, Subcontractor or supplier; pertinent drawing and detail number and specification section number, as appropriate.
- C. Apply Contractor's stamp, signed or initialed certifying that review, approval, verification of Products required, field dimensions, adjacent construction Work and coordination of information is in accordance with the requirements of the Work and Contract Documents.
- D. Schedule submittals to expedite the Project, and deliver to Architect/Engineer/Designer at business address. Coordinate submission of related items.
- E. For each submittal for review, allow 15 days excluding delivery time to and from the contractor.
- F. Identify variations from Contract Documents and Product or system limitations, which may be detrimental to successful performance of the completed Work.
- G. Submittals not requested will not be recognized or processed.

## 1.5 CONSTRUCTION PROGRESS SCHEDULES

- A. Submit initial schedule in duplicate within 15 days after date established in Notice to Proceed.
- B. Revise and resubmit as required.
- C. Submit revised schedules with each Application for Payment, identifying changes since previous version.
- D. Submit a horizontal bar chart with separate line for each major portion of Work or operation, identifying first workday of each week.

## 1.6 PROPOSED PRODUCTS LIST

- A. Within 15 days after date of Notice to Proceed, submit list of major products proposed for use, with name of manufacturer, trade name and model number of each product.
- B. For products specified only by reference standards, give manufacturer, trade name, model or catalog designation and reference standards.

## 1.7 PRODUCT DATA

- A. Product Data for Review:
  - 1. Submitted to Architect/Engineer/Designer for review for the limited purpose of checking for conformance with information given and the design concept expressed in the contract documents.
  - 2. After review, provide copies and distribute in accordance with SUBMITTAL PROCEDURES article above and for record documents purposes described in Section 01700 - CONTRACT CLOSEOUT.
- B. Product Data for Information:
  - 1. Submitted for the Architect/Engineer/Designer's knowledge as contract administrator or for the Owner.
- C. Product Data for Project Closeout:
  - 1. Submitted for the Owner's benefit during and after project completion.
- D. Submit the number of copies, which the Contractor requires, plus two copies that will be retained by the Architect/Engineer/Designer.
- E. Mark each copy to identify applicable products, models, options and other data. Supplement manufacturers' standard data to provide information specific to this Project.
- F. After review distribute in accordance with the Submittal Procedures article above and provide copies for record documents described in Section 01700 - CONTRACT CLOSEOUT.

## 1.8 SHOP DRAWINGS

- A. Shop Drawings for Review:
  - 1. Submitted to Architect/Engineer/Designer for review for the limited purpose of checking for conformance with information given and the design concept expressed in the contract documents.
  - 2. After review, produce copies and distribute in accordance with SUBMITTAL PROCEDURES article above and for record documents purposes described in Section 01700 - CONTRACT CLOSEOUT.
- B. Shop Drawings for Information:
  - 1. Submitted for the Architect/Engineer/Designer's knowledge as contract administrator or for the Owner.

- C. Shop Drawings for Project Closeout:
  - 1. Submitted for the Owner's benefit during and after project completion.
- D. Indicate special utility and electrical characteristics, utility connection requirements and location of utility outlets for service for functional equipment and appliances.
- E. Submit in the form of one reproducible transparency and one opaque reproduction.

#### 1.9 SAMPLES

- A. Samples for Review:
  - 1. Submitted to Architect/Engineer/Designer for review for the limited purpose of checking for conformance with information given and the design concept expressed in the contract documents.
  - 2. After review, produce duplicates and distribute in accordance with SUBMITTAL PROCEDURES article above and for record documents purposes described in Section 01700 - CONTRACT CLOSEOUT.
- B. Samples for Information:
  - 1. Submitted for the Architect/Engineer/Designer's knowledge as contract administrator or for the Owner.
- C. Samples for Selection:
  - 1. Submitted to Architect/Engineer/Designer for aesthetic, color, or finish selection.
  - 2. Submit samples of finishes for Architect/Engineer/Designer selection.
  - 3. After review, produce duplicates and distribute in accordance with SUBMITTAL PROCEDURES article above and for record documents purposes described in Section 01700 - CONTRACT CLOSEOUT.

#### 1.10 DESIGN DATA

- A. Submit for the Architect/Engineer/Designer's knowledge as contract administrator or for the Owner.
- B. Submit for information for the limited purpose of assessing conformance with information given and the design concept expressed in the contract documents.

#### 1.11 TEST REPORTS

- A. Submit for the Architect/Engineer/Designer's knowledge as contract administrator or for the Owner.
- B. Submit test reports for information for the limited purpose of assessing conformance with information given and the design concept expressed in the contract documents.

#### 1.12 CERTIFICATES

- A. When specified in individual specification sections, submit certification by the manufacturer, installation/application subcontractor, or the Contractor to Architect/Engineer/Designer, in quantities specified for Product Data.
- B. Indicate material or Product conforms to or exceeds specified requirements. Submit supporting reference data, affidavits and certifications as appropriate.
- C. Certificates may be recent or previous test results on material or Product but must be acceptable to Architect/Engineer/Designer.

#### 1.13 MANUFACTURER'S INSTRUCTIONS

- A. When specified in individual specification sections, submit printed instructions for delivery,

storage, assembly, installation, and start-up, adjusting and finishing, to Architect/Engineer/Designer for delivery to owner in quantities specified for Product Data.

- B. Indicate special procedures, perimeter conditions requiring special attention and special environmental criteria required for application or installation.
- C. Refer to Section 01400 - Quality Control, Manufacturers' Field Services article.

#### 1.14 MANUFACTURER'S FIELD REPORTS

- A. Submit reports for the Architect/Engineer/Designer's benefit as contract administrator or for the Owner.
- B. Submit for information for the limited purpose of assessing conformance with information given and the design concept expressed in the contract documents.

#### 1.15 ERECTION DRAWINGS

- A. Submit drawings for the Architect/Engineer/Designer's benefit as contract administrator or for the Owner.
- B. Submit for information for the limited purpose of assessing conformance with information given and the design concept expressed in the contract documents.
- C. Data indicating inappropriate or unacceptable Work may be subject to action by the Architect/Engineer/Designer or Owner.

**END OF SECTION**

**01400**

**QUALITY CONTROL REQUIREMENTS**

**PART 1 GENERAL**

1.1 SECTION INCLUDES

- A. Quality assurance - control of installation.
- B. Tolerances
- C. References and standards.
- D. Mock-up.
- E. Inspecting and testing laboratory services.
- F. Manufacturers' field services.

1.2 RELATED SECTIONS

- A. Section 01300 - Submittals: Submission of manufacturers' instructions and certificates.
- B. Section 01600 - Material and Equipment: Requirements for material and product quality.
- C. Section 01650 - Starting of Systems.

1.3 QUALITY ASSURANCE - CONTROL OF INSTALLATION

- A. Monitor quality control over suppliers, manufacturers, Products, services, site conditions and workmanship, to produce Work of specified quality.
- B. Comply with manufacturers' instructions, including each step in sequence.
- C. Should manufacturers' instructions conflict with Contract Documents, request clarification from Architect/Engineer/Designer before proceeding.
- D. Comply with specified standards as minimum quality for the Work except where more stringent tolerances, codes or specified requirements indicate higher standards or more precise workmanship.
- E. Perform Work by persons qualified to produce required and specified quality.
- F. Verify that field measurements are as indicated on shop drawings or as instructed by the manufacturer.
- G. Secure Products in place with positive anchorage devices designed and sized to withstand stresses, vibration, physical distortion, or disfigurement.

1.4 TOLERANCES

- A. Monitor fabrication and installation tolerance control of Products to produce acceptable Work. Do not permit tolerances to accumulate.
- B. Comply with manufacturers' tolerances. Should manufacturers' tolerances conflict with Contract Documents, request clarification from Architect/Engineer/Designer before proceeding.
- C. Adjust Products to appropriate dimensions; position before securing Products in place.

1.5 REFERENCES AND STANDARDS

- A. For Products or workmanship specified by association, trade or other consensus standards, comply with requirements of the standard, except when more rigid requirements are specified or are required by applicable codes.

- B. Conform to reference standard by date of issue current on date for receiving bids or date specified in the individual specification sections, except where a specific date is established by code.
- C. Neither the contractual relationships, duties or responsibilities of the parties in Contract nor those of the Architect/Engineer/Designer shall be altered from the Contract Documents by mention or inference otherwise in any reference document.

#### 1.6 TESTING SERVICES

- A. Contractor to provide all testing services as called out in these specifications.
- B. Testing and source quality control may occur on or off the project site. Perform off-site testing as required by the Architect/Engineer/Designer or the Owner.
- C. Testing does not relieve Contractor to perform Work to contract requirements.
- D. Re-testing required because of non-conformance to specified requirements shall be performed by the same MoDOT personnel on instructions by the Architect/Engineer/Designer.

#### 1.7 INSPECTION SERVICES

- A. Owner will employ MoDOT Personnel to perform inspection.
- B. Inspecting may occur on or off the project site. Perform off-site inspecting as required by the Architect/Engineer/Designer or the Owner.
- C. Inspecting does not relieve Contractor to perform Work to contract requirements.

#### 1.8 MANUFACTURERS' FIELD SERVICES

- A. When specified in individual specification sections, require material or Product suppliers or manufacturers to provide qualified staff personnel to observe site conditions, conditions of surfaces and installation, quality of workmanship, start-up of equipment, test, adjust and the balancing of equipment as applicable and to initiate instructions when necessary.
- B. Report observations and site decisions or instructions given to applicators or installers that are supplemental or contrary to manufacturers' written instructions.
- C. Refer to Section 01300 - SUBMITTALS, MANUFACTURERS' FIELD REPORTS article.

### **PART 2 EXECUTION**

#### 2.1 EXAMINATION

- A. Verify that existing site conditions and substrate surfaces are acceptable for subsequent Work. Beginning new Work means acceptance of existing conditions.
- B. Verify that existing substrate is capable of structural support or attachment of new Work being applied or attached.

#### 2.2 PREPARATION

- A. Clean substrate surfaces prior to applying next material or substance.
- B. Seal cracks or openings of substrate prior to applying next material or substance.
- C. Apply manufacturer required or recommended substrate primer, sealer or conditioner prior to applying any new material or substance in contact or bond.

**END OF SECTION**

01500

**CONSTRUCTION FACILITIES AND TEMPORARY CONTROL REQUIREMENTS**

**PART 1 GENERAL**

1.1 SECTION INCLUDES

- A. Temporary Utilities: Electricity, telephone service, facsimile service and sanitary facilities.
- B. Temporary Controls: enclosures and fencing, protection of the Work and water control.
- C. Construction Facilities: progress cleaning and temporary buildings.

1.2 TEMPORARY ELECTRICITY

- A. Cost: By Contractor; pay for temporary power service furnished by MoDOT.

1.3 TELEPHONE SERVICE

- A. Provide, maintain, and pay for telephone service to field office and Architect/Engineer/Designer's field office at time of project mobilization.

1.4 TEMPORARY WATER SERVICE

- A. Connect to existing water source as directed for construction operations at time of project mobilization.
- B. Contractor will reimburse Owner for water used in construction as agreed upon at time of project mobilization.

1.5 TEMPORARY SANITARY FACILITIES

- A. Provide and maintain required facilities and enclosures. Provide at time of project mobilization.

1.6 FENCING

- A. Construction: Use plastic mesh safety fencing or better.
- B. Provide 48" high fence around construction site; equip with vehicular and pedestrian gates with locks.

1.7 WATER CONTROL

- A. Grade site to drain. Maintain excavations free of water. Provide, operate and maintain pumping equipment.
- B. Protect site from puddling or running water. Provide water barriers as required to protect site from soil erosion.

1.8 EXTERIOR ENCLOSURES

- A. Provide temporary weather tight closure of exterior openings to accommodate acceptable working conditions and protection for Products, to allow for temporary heating and maintenance of required ambient temperatures identified in individual specification sections, and to prevent entry of unauthorized persons. Provide access doors with self-closing hardware and locks.

1.9 PROTECTION OF INSTALLED WORK

- A. Protect installed Work and provide special protection where specified in individual specification sections.

- B. Provide temporary and removable protection for installed Products. Control activity in immediate work area to prevent damage.
- C. Provide protective coverings at walls, projections, jambs, sills and soffits of openings.
- D. Protect finished floors, stairs, and other surfaces from traffic, dirt, wear, damage or movement of heavy objects, by protecting with durable sheet materials.
- E. Prohibit traffic or storage upon waterproofed or roofed surfaces. If traffic or activity is necessary, obtain recommendations for protection from waterproofing or roofing material manufacturer.
- F. Prohibit traffic from landscaped areas.

1.10 SECURITY

- A. Provide security and facilities to protect Work and existing facilities and Owner's operations from unauthorized entry, vandalism or theft.
- B. Coordinate with Owner's security program.

1.11 ACCESS ROADS

- A. Provide and maintain access to fire hydrants, free of obstructions.
- B. Provide means of removing mud from vehicle wheels before entering streets.
- C. Designated existing on-site roads may be used for construction traffic.

1.12 PROGRESS CLEANING AND WASTE REMOVAL

- A. Maintain areas free of waste materials, debris and rubbish. Maintain site in a clean and orderly condition.
- B. Remove debris and rubbish from pipe chases, plenums, attics, crawl spaces and other closed or remote spaces, prior to enclosing the space.
- C. Broom and vacuum clean interior areas prior to start of surface finishing and continue cleaning to eliminate dust.
- D. Collect and remove waste materials, debris and rubbish from site periodically and dispose off-site.
- E. Open free-fall chutes are not permitted. Terminate closed chutes into appropriate containers with lids.

1.13 FIELD OFFICES AND SHEDS

- A. Office: Weather tight, with lighting, electrical outlets, heating and ventilating equipment and equipped with drawing rack and drawing display table.
- B. Provide space for Project meetings, with table and chairs to accommodate 6 persons.

1.14 REMOVAL OF UTILITIES, FACILITIES, AND CONTROLS

- A. Remove temporary utilities, equipment, facilities and materials prior to Final Application for Payment inspection.
- B. Clean and repair damage caused by installation or use of temporary work.
- C. Restore existing facilities used during construction to original condition. Restore permanent facilities used during construction to specified condition.

**PART 2 PRODUCTS**

Not Used.

**PART 3 EXECUTION**

Not Used.

**END OF SECTION**

01600

**MATERIAL AND EQUIPMENT REQUIREMENT**

**PART 1 GENERAL**

1.1 SECTION INCLUDES

- A. Products.
- B. Transportation and handling.
- C. Storage and protection.
- D. Product options.
- E. Substitutions.

1.2 RELATED SECTIONS

- A. Instructions to Bidders: Product options and substitution procedures.
- B. Section 01400 - Quality Control: Product quality monitoring.

1.3 PRODUCTS

- A. Do not use materials and equipment removed from existing premises, except as specifically permitted by the Contract Documents.
- B. Provide interchangeable components of the same manufacture for components being replaced.

1.4 TRANSPORTATION AND HANDLING

- A. Transport and handle Products in accordance with manufacturer's instructions.
- B. Promptly inspect shipments to ensure that Products comply with requirements, quantities are correct and products are undamaged.
- C. Provide equipment and personnel to handle Products by methods to prevent soiling, disfigurement or damage.

1.5 STORAGE AND PROTECTION

- A. Store and protect Products in accordance with manufacturers' instructions.
- B. Store with seals and labels intact and legible.
- C. Store sensitive Products in weather tight, climate controlled, enclosures in an environment favorable to Product.
- D. For exterior storage of fabricated Products, place on sloped supports above ground.
- E. Provide bonded off-site storage and protection when site does not permit on-site storage or protection.
- F. Cover Products subject to deterioration with impervious sheet covering. Provide ventilation to prevent condensation and degradation of Products.
- G. Store loose granular materials on solid flat surfaces in a well-drained area. Prevent mixing with foreign matter.
- H. Provide equipment and personnel to store Products by methods to prevent soiling, disfigurement or damage.

- I. Arrange storage of Products to permit access for inspection. Periodically inspect to verify Products are undamaged and are maintained in acceptable condition.

1.6 PRODUCT OPTIONS

- A. Products Specified by Reference Standards or by Description Only: Any Product meeting those standards or description is acceptable.
- B. Products Specified by Naming One or More Manufacturers: Products of manufacturers named and meeting specifications, no options or substitutions allowed.
- C. Products Specified by Naming One or More Manufacturers with a Provision for Substitutions: Submit a request for substitution for any manufacturer not named in accordance with the following article.

1.7 SUBSTITUTIONS

- A. Architect/Engineer/Designer will consider requests for Substitutions only within 15 days after date established in Notice to Proceed.
- B. Substitutions may be considered when a Product becomes unavailable through no fault of the Contractor.
- C. Document each request with complete data substantiating compliance of proposed Substitution with Contract Documents.
- D. A request constitutes a representation that the Contractor:
  - 1. Has investigated proposed Product and determined that it meets or exceeds the quality level of the specified Product.
  - 2. Will provide the same warranty for the Substitution as for the specified Product.
  - 3. Will coordinate installation and make changes to other Work that may be required for the Work to be complete with no additional cost to Owner.
  - 4. Waives claims for additional costs or time extension that may subsequently become apparent.
  - 5. Will reimburse Owner for review or redesign services associated with re-approval by authorities.
- E. Substitutions will not be considered when they are indicated or implied on shop drawing or product data submittals, without separate written request or when acceptance will require revision to the Contract Documents.
- F. Substitution Submittal Procedure:
  - 1. Submit three copies of request for Substitution for consideration. Limit each request to one proposed Substitution.
  - 2. Submit shop drawings, product data and certified test results attesting to the proposed Product equivalence. Burden of proof is on proposer.
  - 3. The Architect/Engineer/Designer will notify Contractor in writing of decision to accept or reject request.

**PART 2 PRODUCTS**

Not Used.

**PART 3 EXECUTION**

Not Used.

**END OF SECTION**

**CONTRACT CLOSEOUT REQUIREMENT**

**PART 1 GENERAL**

1.1 SECTION INCLUDES

- A. Closeout procedures.
- B. Final cleaning.
- C. Adjusting.
- D. Project record documents.
- E. Operation and maintenance data.
- F. Spare parts and maintenance Products.
- G. Warranties.

1.2 RELATED SECTIONS

- A. Section 01500 - Construction Facilities and Temporary Controls: Progress cleaning.
- B. Section 01650 - Starting of Systems: System start-up, testing, adjusting and balancing.

1.3 CLOSEOUT PROCEDURES

- A. Submit written certification that Contract Documents have been reviewed, Work has been inspected, and that Work is complete in accordance with Contract Documents and ready for Architect/Engineer/Designer's review.
- B. Provide submittals to Owner that is required by governing or other authorities.
- C. Submit final Application for Payment identifying total adjusted Contract Sum, previous payments and sum remaining due.
- D. Owner will occupy portions of the building as specified in Section 01010.

1.4 FINAL CLEANING

- A. Execute final cleaning prior to final project assessment. Clean interior and exterior glass, surfaces exposed to view; remove temporary labels, stains and foreign substances, polish transparent and glossy surfaces, vacuum carpeted and soft surfaces.
- B. Clean equipment and fixtures to a sanitary condition with cleaning materials appropriate to the surface and material being cleaned.
- C. Clean or replace filters of operating equipment used during construction and/or adjustment.
- D. Clean debris from roofs, gutters, downspouts and drainage systems.
- E. Clean site; sweep paved areas, rake clean landscaped surfaces.
- F. Remove waste and surplus materials, rubbish and construction facilities from the site.

1.5 ADJUSTING

- A. Adjust operating Products and equipment to ensure smooth and unhindered operation.

1.6 PROJECT RECORD DOCUMENTS

- A. Store record documents separate from documents used for construction.

- B. Record information concurrent with construction progress.
- C. Specifications: Legibly mark and record at each Product section description of actual Products installed, including the following:
  - 1. Manufacturer's name and product model and number.
  - 2. Product substitutions or alternates utilized.
  - 3. Changes made by Addenda and modifications.
- D. Record Drawings and Shop Drawings: Legibly mark each item to record actual construction including:
  - 1. Measured depths of foundations in relation to finish main floor datum.
  - 2. Measured horizontal and vertical locations of underground utilities and appurtenances, referenced to permanent surface improvements.
  - 3. Measured locations of internal utilities and appurtenances concealed in construction, referenced to visible and accessible features of the Work.
  - 4. Field changes of dimension and detail.
  - 5. Details not on original Contract drawings.
- E. Submit documents to Architect/Engineer/Designer's with claim for final Application for Payment.

#### 1.7 OPERATION AND MAINTENANCE DATA

- A. Submit data bound in 8-1/2 x 11 inch (A4) text pages, three D side ring binders with durable plastic covers.
- B. Prepare binder cover with printed title "OPERATION AND MAINTENANCE INSTRUCTIONS", title of project and subject matter of binder when multiple binders are required.
- C. Internally subdivide the binder contents with permanent page dividers, logically organized; with tab titling clearly printed under reinforced laminated plastic tabs.
- D. Submit 1 draft copy of completed volumes 15 days prior to final inspection. This copy will be reviewed and returned with Architect/Engineer/Designer comments. Revise content of all document sets as required prior to final submission.
- E. Submit two sets of revised final volumes, within 10 days after final inspection.

#### 1.8 SPARE PARTS AND MAINTENANCE PRODUCTS

- A. Provide spare parts, maintenance, and extra Products in quantities specified individual specification sections.
- B. Deliver to Project site; obtain receipt prior to final payment.
- C. Examine system components at a frequency consistent with reliable operation. Clean, adjust and lubricate as required.
- D. Include systematic examination, adjustment, and lubrication of components. Repair or replace parts whenever required. Use parts produced by the manufacturer of the original component.
- E. Maintenance service shall not be assigned or transferred to any agent or Subcontractor without prior written consent of the Owner.

#### 1.9 WARRANTIES

- A. Execute and assemble transferable warranty documents from Subcontractors, suppliers and manufacturers.
- B. Submit prior to final Application for Payment.
- C. For items of Work delayed beyond date of Final Completion, provide updated submittal within 10 days after acceptance, listing date of acceptance as start of the warranty period.

**PART 2      PRODUCTS**

Not Used.

**PART 3      EXECUTION**

Not Used.

**END OF SECTION**

**02050**

**DEMOLITION**

**PART 1 GENERAL**

**1.1 DESCRIPTION OF WORK**

- A. The work to be done under these Specifications shall include all labor, materials, equipment and services necessary to complete all demolition of designated concrete slabs, concrete and asphalt sidewalks off-site as noted on Construction Documents.

**PART 2 PRODUCTS**

This Section not used.

**PART 3 EXECUTION**

**3.1 PROTECTION OF EXISTING FACILITIES**

- A. The contractor shall, as soon as he receives a Notice to Proceed with work, enter the premises and do any and all things necessary to protect the premises from damage by unauthorized persons. The contractor shall protect all existing equipment, pavements, tracks, poles, pipes, utilities, etc., which are not affected by demolition work. The contractor shall provide all shoring, bracing, tarps, temporary partitions, barricades, and/or other safety devices deemed necessary for protection.

**3.2 OWNERSHIP OF PROPERTY**

- A. No right, title property or interest of any kind whatsoever in or to the land or premises upon which such buildings or structures stand, is created, assigned, conveyed, granted, or transferred to the contractor, or any other person or persons, except only the right on entry to remove such buildings and structures in strict accordance with the Contract.
- B. Only such property may be salvaged by contractor as is owned by MoDOT, and in the event of any doubt respecting the ownership of any particular property, the contractor shall request from MoDOT a written statement respecting its ownership.
- C. All salvage becomes the property of the contractor, but storage of such materials and equipment of the project area will not be permitted except for the duration of the demolition contract.
- D. Personal property of third persons or of occupants of building on the site shall not become the property of the contractor.

**3.3 DEMOLITION REQUIREMENTS**

The work under this contract shall consist of the following:

- A. Demolition and removal off-site of all the concrete sidewalks and slabs as designated on the plans.
- B. Provide, erect, and maintain temporary barriers and security devices.
- C. Protect existing landscaping and/or paving that is not to be demolished.
- D. Remove and dispose of all foundation walls, partition walls, columns, piers, beams, and concrete slab on grade.
- E. Perform all other incidental work necessary to fully complete the contract.
- F. Rough grade and compact areas affected by demolition to maintain site grades and contours.
- G. All rubbish, non-reusable fill, debris, equipment, etc., resulting from demolition work shall be removed from the premises during and-or upon completion of work, leaving the site area acceptable to the satisfaction of the owner.
- H. The contractor shall furnish the disposal site for all demolition of concrete and asphalt materials.

- I. The contractor shall take whatever steps necessary to control dust during demolition and removal. The contractor will monitor the haul road for debris.

**END OF SECTION**

**02100**

**SITE PREPARATION**

**PART 1 SCOPE**

- A. The contractor shall visit the site and carefully examine the conditions of the premises to determine the amount of work and materials required for the work necessary to prepare the site in every respect for the construction of the foundation as shown on the plans.
- B. The contractor shall be responsible for determining the quantities of materials to be excavated and handled and for the amount of backfilling, filling and grading to be done in order to perform all work required on the Construction Documents.
- C. The contractor shall be responsible to slope final grade away from sidewalks to drain. Cross slopes not to exceed ADA requirements.
- D. Unused topsoil material can be stock piled on site where determined by Owner.

**PART 2 SEEDING AND MULCHING**

- A. All areas surrounding the new concrete sidewalks, slabs and all areas disturbed during construction shall be seeded and mulched.
- B. Fertilizing:
  - 1. Soil Neutralization: Shall be at the rate of 1000 pounds of effective neutralization per acre as per Specification Section 801.2.2 of the Missouri Standard Specifications for Highway Construction.
  - 2. Commercial Fertilizer: In accordance with Specification Section 801.2.3 of the Missouri Standard Specifications for Highway Construction, fertilizers shall be applied at the following rates:
    - (a) Nitrogen 80 lb. per acre
    - (b) Phosphoric Acid 240 lb. per acre
    - (c) Potash 80 lb. per acre
- C. Seeding: Seed shall be Champion 3 + 3 Fescue Blend as sold by Mangelsdorf Seed Company, or equivalent as approved by the owner. The seed shall be applied at a rate of 400 lb. per acre.
- D. Mulching: The mulch shall be Type 1 mulch as per Specification Section 802 of the Missouri Standard Specifications for Highway Construction.

**END OF SECTION**

**EXCAVATING, BACKFILLING AND COMPACTING**

**PART 1 GENERAL**

1.1 SUMMARY

- A. Excavate, backfill, compact, and grade the site to the elevations shown on the Drawings, as specified herein, and as needed to meet the requirements of the construction shown in the Contract Documents.
- B. Related work:
  - 1. Documents affecting work of this Section include, but are not necessarily limited to, General Conditions, Supplementary Conditions and Sections in Division 1 of these Specifications.

1.2 QUALITY ASSURANCE

- A. Use adequate numbers of skilled workmen who are thoroughly trained and experienced in the necessary crafts and who are completely familiar with the specified requirements and the methods needed for proper performance of the work of this Section.
- B. Use equipment adequate in size, capacity and numbers to accomplish the work of this Section in a timely manner.
- C. In addition to complying with requirements of governmental agencies having jurisdiction, comply with the directions of the MoDOT Inspector.

1.3 DELIVERY, STORAGE AND HANDLING

- A. Comply with pertinent provisions of Section 01620.

**PART 2 PRODUCTS**

2.1 SOIL MATERIALS

- A. Fill and backfill materials:
  - 1. Provide soil materials free from organic matter and deleterious substances, containing no rocks or lumps over 6" in greatest dimension, and with not more than 15% of the rocks or lumps larger than 2-3/8" in their greatest dimension.
  - 2. Fill material is subject to the approval of the MoDOT Inspector, and are those materials removed from excavations or imported from off-site borrow areas; predominantly granular, non-expansive soils free from roots and other deleterious matter.
  - 3. Do not permit rocks having a dimension greater than 1" in the upper 12" of fill or embankment.
  - 4. Cohesionless material used for structural backfill. Provide sand free from organic material and other foreign matter, and as approved by the MoDOT Inspector.
  - 5. Where granular base is called for under building slabs, provide aggregate complying with requirements of Section 03300 of these Specifications.

2.2 TOPSOIL

- A. Where and if shown on the Drawings or otherwise required, provide topsoil consisting of friable, fertile soil of loamy character, containing an amount of organic matter normal to the region, capable of sustaining healthy plant life, and reasonably free from subsoil, roots, heavy or stiff clay, stones larger than 2" in greatest dimension, noxious weeds, sticks, brush, litter and other deleterious matter.

- B. Obtain topsoil/backfill from sources within the project limits as approved by Owner, or provide imported topsoil obtained from sources outside the project limits or from both sources.

### 2.3 OTHER MATERIALS

- A. Provide other materials, not specifically described but required for a complete and proper installation, as selected by the Contractor subject to the approval of the Architect.

## **PART 3 EXECUTION**

### 3.1 SURFACE CONDITIONS

- A. Examine the areas and conditions under which work of this Section will be performed. Correct conditions detrimental to timely and proper completion of the Work. Do not proceed until unsatisfactory conditions are corrected.

### 3.2 FINISH ELEVATIONS AND LINES

- A. Comply with pertinent provisions of Section 01050.

### 3.3 PROCEDURES

- A. Utilities:
  - 1. Unless shown to be removed, protect active utility lines shown on the Drawings or otherwise made known to the Contractor prior to excavating. If damaged, repair or replace at no additional cost to the Owner.
  - 2. If active utility lines are encountered and are not shown on the Drawings or otherwise made known to the Contractor, promptly take necessary steps to assure that service is not interrupted.
  - 3. If service is interrupted as a result of work under this Section, immediately restore service by repairing the damaged utility at no additional cost to the Owner.
  - 4. If existing utilities are found to interfere with the permanent facilities being constructed under this Section, immediately notify the Architect and secure his instructions.
  - 5. Do not proceed with permanent relocation of utilities until written instructions are received from the Architect.
- B. Protection of persons and property:
  - 1. Barricade open holes and depressions occurring as part of the Work, and post warning lights on property adjacent to or with public access.
  - 2. Operate warning lights during hours from dusk to dawn each day and as otherwise required.
  - 3. Protect structures, utilities, sidewalks, pavements and other facilities from damage caused by settlement, lateral movement, washout and other hazards created by operations under this Section.
- C. Dewatering:
  - 1. Remove all water, including rainwater encountered during trench and sub-structure work to an approved location by pumps, drains and other approved methods.
  - 2. Keep excavations and site construction area free from water.
- D. Use means necessary to prevent dust becoming a nuisance to the public, to neighbors and to other work being performed on or near the site.
- E. Maintain access to adjacent areas at all times.

### 3.4 EXCAVATING

- A. Perform excavating of every type of material encountered within the limits of the Work to the lines, grades and elevations indicated and specified herein.
- B. Satisfactory excavated materials:
  - 1. Transport to and place in, fill or embankment areas within the limits of the Work.
- C. Unsatisfactory excavated materials:
  - 1. Excavate to a distance below grade as directed by the MoDOT Inspector and replace with satisfactory materials.
  - 2. Include excavation of unsatisfactory materials and replacement by satisfactory materials, as parts of the work of this Section.
- D. Surplus materials:
  - 1. Dispose of unsatisfactory excavated material, and surplus satisfactory excavated material, at the site where designated by the Owner.
- E. Excavation of rock:
  - 1. Where rocks, boulders, granite, or similar material is encountered, and where such material cannot be removed or excavated by conventional earth moving or ripping equipment, take required steps to proceed with the general grading operations of the Work, and remove or excavate such material by means which will neither cause additional cost to the Owner nor endanger buildings or structures whether on or off the site.
  - 2. Do not use explosives without written permission from the Architect.
- F. Excavate and backfill in a manner and sequence that will provide proper drainage at all times.
- G. Borrow:
  - 1. Obtain material required for fill or embankment in excess of that produced within the grading limits of the Work from borrow areas selected and paid for by the Contractor and approved by the MoDOT Inspector.
- H. Ditches and gutters:
  - 1. Cut accurately to the cross sections, grades and elevations shown.
  - 2. Maintain excavations free from detrimental quantities of leaves, sticks, trash, and other debris until completion of the Work.
  - 3. Dispose of excavated materials as shown on the Drawings or directed by the MoDOT Inspector; except do not, in any case, deposit materials less than 3'-0" from the edge of a ditch.
- I. Unauthorized excavation:
  - 1. Unauthorized excavation consists of removal of materials beyond indicated subgrade elevations or dimensions without specific instruction from the Architect or the MoDOT Inspector.
  - 2. Under footings, foundations, or retaining walls:
    - a. Fill unauthorized excavations by extending the indicated bottom elevation of the footing or base to the excavation bottom, without altering the required top elevation.
    - b. When acceptable to the soil engineer, lean concrete fill may be used to bring the bottom elevation to proper position.
  - 3. Elsewhere backfill and compact unauthorized excavations as specified for authorized excavations, unless otherwise directed by a MoDOT soil engineer.

- J. Stability of excavations:
  1. Slope sides of excavations to 1:1 or flatter, unless otherwise directed by the MoDOT Inspector.
  2. Shore and brace where sloping is not possible because of space restrictions or stability of the materials being excavated.
  3. Maintain sides and slopes of excavations in a safe condition until completion of backfilling.
  
- K. Excavating for structures:
  1. Conform to elevations and dimensions shown within a tolerance of 0.10 ft, and extending a sufficient distance from footings and foundations to permit placing and removing concrete formwork, installation of services, other construction required and for inspection.
  2. In excavating for footings and foundations, take care not to disturb bottom of excavation:
    - a. Excavate by hand tools to final grade just before concrete is placed.
    - b. Trim bottoms to required lines and grades to leave solid base to receive concrete.
  3. Excavate for footings and foundations only after general site excavating, filling and grading are complete.
  
- L. Excavating for pavements:
  1. Cut surface under pavements to comply with cross sections, elevations and grades.
  
- M. Cold weather protection:
  1. Protect excavation bottoms against freezing when atmospheric temperature is less than 35 degrees F.

### 3.5 FILLING AND BACKFILLING

- A. General:
  1. For each classification listed below, place acceptable soil material in layers to required subgrade elevations.
  2. In excavations:
    - a. Use satisfactory excavated or borrowed materials.
  3. Under building slabs:
    - a. Use subbase materials.
  4. Under building slabs:
    - a. Use granular fill, if so called for on the Drawings, complying with aggregate acceptable under Section 03300 of these Specifications.
  
- B. Backfill excavations as promptly as progress of the Work permits, but not until completion of the following.
  1. Acceptance of construction below finish grade including, where applicable, dampproofing and waterproofing.
  2. Inspecting, testing, approving and recording locations of underground utilities.
  3. Removing concrete formwork.
  4. Removing shoring and bracing and backfilling of voids with satisfactory materials.
  5. Removing trash and debris.
  6. Placement of horizontal bracing on horizontally supported walls.
  
- C. Ground surface preparation:
  1. Remove vegetation, debris, unsatisfactory soil materials, obstructions and deleterious matter from ground surface prior to placement of fills.
  2. Plow, strip, or break up sloped surfaces steeper than one vertical to four horizontal so that fill material will bond with existing surface.
  3. When existing ground surface has a density less than that specified under "compacting" for the particular area, break up the ground surface, pulverize moisture-condition to the optimum moisture content and compact to required depth and percentage of maximum density.

- D. Placing and compacting:
1. Place backfill and fill materials in layers not more than 8" in loose depth.
  2. Before compacting, moisten or aerate each layer as necessary to provide the optimum moisture content.
  3. Compact each layer to required percentage of maximum density for area.
  4. Do not place backfill or fill material on surfaces that are muddy, frozen or containing frost or ice.
  5. Place backfill and fill materials evenly adjacent to structures, to required elevations.
  6. Take care to prevent wedging action of backfill against structures by carrying the material uniformly around the structure to approximately the same elevation in each lift.
  7. Where the construction includes basement or other underground walls having structural floors over them, do not backfill such walls until the structural floors are in place and have attained sufficient strength to support the walls.

### 3.6 GRADING

- A. General:
1. Uniformly grade the areas within limits of grading under this Section, including adjacent transition areas.
  2. Smooth the finished surfaces within specified tolerance.
  3. Compact with uniform levels or slopes between points where elevations are shown on the Drawings, or between such points and existing grades.
  4. Where a change of slope is indicated on the Drawings, construct a rolled transition section having a minimum radius of approximately 8'0", unless adjacent construction will not permit such a transition or if such a transition defeats positive control of drainage.
- B. Grading outside building lines:
1. Grade areas adjacent to buildings to achieve drainage away from the structures and to prevent ponding.
  2. Finish the surfaces to be free from irregular surface changes, and:
    - a. Shape the surface of areas scheduled to be under walks to line, grade and cross-section, with finished surface not more than 0.10 ft above or below the required subgrade elevation.
    - b. Shape the surface of areas scheduled to be under pavement to line, grade and cross-section, with finished surface not more than 0.05 ft above or below the required subgrade elevation.

### 3.7 COMPACTING

- A. Control soil compaction during construction to provide the minimum percentage of density specified for each area as determined according to ASTM D1557.
- B. Provide not less than the following maximum density of soil material compacted at optimum moisture content for the actual density of each layer of soil material in place and as approved by the MoDOT Inspector.
1. Structures:
    - a. Compact the top 8" of subgrade and each layer of fill material or backfill material at 90% of maximum density.
  2. Lawn and unpaved areas:
    - a. Compact the top 8" of subgrade and each layer of fill material or backfill material at 90% of maximum density.

- b. Compact the upper 12" of filled areas, or natural soils exposed by excavating, at 85% of maximum density.
    - 3. Walks:
      - a. Compact the top 8" of subgrade and each layer of fill material or backfill material at 90% of maximum density.
    - 4. Pavements:
      - a. Compact the top 8" of subgrade and each layer of fill material or backfill material at 90% of maximum density.
  - C. Moisture control:
    - 1. Where subgrade or layer of soil material must be moisture-conditioned before compacting, uniformly apply water to surface of subgrade or layer of soil material to prevent free water appearing on surface during or subsequent to compacting operations.
    - 2. Remove and replace or scarify and air dry, soil material that is too wet to permit compacting to the specified density.
    - 3. Soil material that has been removed because it is too wet to permit compacting may be stockpiled or spread and allowed to dry. Assist drying by disking, harrowing, or pulverizing until moisture content is reduced to a satisfactory value as determined by moisture-density relation tests approved by the MoDOT Inspector.

### 3.8 MAINTENANCE

- A. Protection of newly graded areas:
  - 1. Protect newly graded areas from traffic and erosion, and keep free from trash and weeds;
  - 2. Repair and establish grades in settled, eroded and rutted areas to the specified tolerances.
- B. Where completed compacted areas are disturbed by subsequent construction operations or adverse weather, scarify the surface, reshape and compact to the required density prior to further construction.

**END OF SECTION**

## 03100

### CONCRETE FORMWORK

#### PART 1 GENERAL

##### 1.1 SECTION INCLUDES

- A. Formwork for cast-in place concrete, with shoring, bracing and anchorage.
- B. Openings for other work.
- C. Form accessories.
- D. Form stripping.

##### 1.2 PRODUCTS INSTALLED BUT NOT FURNISHED UNDER THIS SECTION

- A. Section 03200 - Concrete Reinforcement
- B. Section 03300 - Cast-in-Place Concrete: Supply of concrete accessories for placement by this section.
- C. Section 05500 - Metal Fabrications: Supply of metal fabrications for placement by this section.

##### 1.3 RELATED SECTIONS

- A. Section 03200 - Concrete Reinforcement.
- B. Section 03300 - Cast-in-Place Concrete.

##### 1.4 REFERENCES

- A. ACI 301 - Structural Concrete for Buildings.
- B. ACI 318 - Building Code Requirements for Reinforced Concrete.
- C. ACI 347 - Recommended Practice for Concrete Formwork.
- D. PS 1 - Construction and Industrial Plywood.

##### 1.5 DESIGN REQUIREMENTS

- A. Design, engineer and construct formwork, shoring and bracing to conform to design and code requirements; concrete to conform to required shape, line and dimension.

##### 1.6 SUBMITTALS

- A. Submit under provisions of Section 01300.
- B. Product Data: Provide data on void form materials and installation requirements.

##### 1.7 QUALITY ASSURANCE

- A. Perform Work in accordance with ACI 347.

##### 1.8 REGULATORY REQUIREMENTS

- A. Conform to applicable code for design, fabrication, erection and removal of formwork.

##### 1.9 FIELD SAMPLES

- A. Provide under provisions of Section 01400. Coordinate with requirements stated in Section 03100 and 03300.

1.10 DELIVERY, STORAGE AND HANDLING

- A. Deliver, store, protect and handle products to site under provisions of Section 01600.
- B. Deliver void forms and installation instructions in manufacturer's packaging.
- C. Store off ground in ventilated and protected manner to prevent deterioration from moisture.

1.11 COORDINATION

- A. Coordinate work under provisions of Section 01039.
- B. Coordinate this Section with other Sections of work that require attachment of components to formwork.
- C. If formwork is placed after reinforcement resulting in insufficient concrete cover over reinforcement before proceeding, request instructions from Architect/Engineer.

**PART 2 PRODUCTS**

2.1 WOOD FORM MATERIALS

- A. Plywood: Douglas fir species; grade B/B plyform class 1 or 2; sound undamaged sheets with clean, true edges.
- B. Lumber: Douglas fir species; standard grade; with grade stamp clearly visible.

2.2 PREFABRICATED FORMS

- A. Preformed Steel Forms: Minimum 16 gauge matched, tight fitting, stiffened to support weight of concrete without deflection detrimental to tolerances and appearance of finished surfaces.
- B. Pan Type: Steel of size and profile required.
- C. Tubular Column Type: Round, spirally wound laminated fiber material, surface treated with release agent, non-reusable, of sizes required.
- D. Void Forms: Moisture resistant treated paper faces, biodegradable, structurally sufficient to support weight of wet concrete mix until initial set; 2 inches thick.

2.3 FORMWORK ACCESSORIES

- A. Form Ties: Snap-off type, galvanized metal, fixed length, cone type, with waterproofing washer, free of defects that could leave holes larger than 1 inch in concrete surface.
- B. Form Release Agent: Colorless mineral oil which will not stain concrete, or absorb moisture, or impair natural bonding or color characteristics of coating intended for use on concrete.
- C. Dovetail Anchor Slot: Galvanized steel, 22 gauge thick, foam filled, release tape sealed slots, anchors for securing to concrete formwork.
- D. Flashing Reglets: Galvanized steel, 22 gauge thick, longest possible lengths, with alignment splines for joints, foam filled, release tape sealed slots, anchors for securing to concrete formwork.
- E. Nails, Spikes, Lag Bolts, Through Bolts, Anchorages: Sized as required, of sufficient strength and character to maintain formwork in place while placing concrete.
- F. Waterstops: Rubber, minimum 1,750 p.s.i tensile strength, minimum 50 degrees F to plus 175 degrees F working temperature range, wide, maximum possible lengths, ribbed profile, preformed corner sections, heat welded jointing.

## **PART 3        EXECUTION**

### **3.1        EXAMINATION**

- A.        Verify lines, levels and centers before proceeding with formwork. Ensure that dimensions agree with drawings.

### **3.2        EARTH FORMS**

- A.        Earth forms are not permitted.

### **3.3        ERECTION - FORMWORK**

- A.        Erect formwork, shoring and bracing to achieve design requirements, in accordance with ACI 301.
- B.        Provide bracing to ensure stability of formwork. Shore or strengthen formwork subject to over stressing by construction loads.
- C.        Arrange and assemble formwork to permit dismantling and stripping. Do not damage concrete during stripping. Permit removal of remaining principal shores.
- D.        Align joints and make watertight. Keep form joints to a minimum.
- E.        Obtain approval before framing openings in structural members that are not indicated on Drawings.
- F.        Install void forms in accordance with manufacturer's recommendations. Protect forms from moisture or crushing.

### **3.4        APPLICATION - FORM RELEASE AGENT**

- A.        Apply form release agent on formwork in accordance with manufacturer's recommendations.
- B.        Apply prior to placement of reinforcing steel, anchoring devices and embedded items.
- C.        Do not apply form release agent where concrete surfaces will receive special finishes or applied coverings that are affected by agent. Soak inside surfaces of untreated forms with clean water. Keep surfaces coated prior to placement of concrete.

### **3.5        INSERTS, EMBEDDED PARTS, AND OPENINGS**

- A.        Provide formed openings where required for items to be embedded in passing through concrete work.
- B.        Locate and set in place items which will be cast directly into concrete.
- C.        Coordinate with work of other sections in forming and placing openings, slots, reglets, recesses, sleeves, bolts, anchors, other inserts and components of other Work.
- D.        Install accessories in accordance with manufacturer's instructions, straight, level and plumb. Ensure items are not disturbed during concrete placement.
- E.        Install water-stops continuous without displacing reinforcement. Heat seal all joints watertight.
- F.        Provide temporary ports or openings in formwork where required to facilitate cleaning and inspection. Locate openings at bottom of forms to allow flushing water to drain.
- G.        Close temporary openings with tight fitting panels, flush with inside face of forms and neatly fitted so joints will not be apparent in exposed concrete surfaces.

### **3.6        FORM CLEANING**

- A.        Clean forms as erection proceeds, to remove foreign matter within forms.
- B.        Clean formed cavities of debris prior to placing concrete.
- C.        Flush with water or use compressed air to remove remaining foreign matter. Ensure that water and debris drain to exterior through clean-out ports.
- D.        During cold weather, remove ice and snow from within forms. Do not use de-icing salts. Do not use water to clean out forms, unless formwork and concrete construction proceed within heated enclosure. Use compressed air or other means to remove foreign matter.

3.7 FORMWORK TOLERANCES

- A. Construct formwork to maintain tolerances required by ACI 301.

3.8 FIELD QUALITY CONTROL

- A. Inspect erected formwork, shoring, and bracing to ensure that work is in accordance with formwork design and that supports, fastenings, wedges, ties and items are secure.
- B. Do not reuse wood formwork more than 2 times for concrete surfaces to be exposed to view. Do not patch formwork.

3.9 FORM REMOVAL

- A. Do not remove forms or bracing until concrete has gained sufficient strength to carry its own weight and imposed loads.
- B. Loosen forms carefully. Do not wedge pry bars, hammers or tools against finish concrete surfaces scheduled for exposure to view.
- C. Store removed forms in manner that surfaces to be in contact with fresh concrete will not be damaged. Discard damaged forms.

**END OF SECTION**

**03200**

**CONCRETE REINFORCEMENT**

**PART 1 GENERAL**

1.1 SECTION INCLUDES

- A. Reinforcing steel bars, wire fabric and accessories for cast-in-place concrete.

1.2 RELATED SECTIONS

- A. Section 03100 - Concrete Formwork.
- B. Section 03300 - Cast-in-Place Concrete.

1.3 REFERENCES

- A. ACI 301 - Structural Concrete for Buildings.
- B. ACI 318 - Building Code Requirements for Reinforced Concrete.
- C. ACI SP-66 - American Concrete Institute - Detailing Manual.
- D. ACI 315-99 – Details and Detailing of Concrete Reinforcement
- E. ANSI/ASTM A82 - Cold Drawn Steel Wire for Concrete Reinforcement.
- F. ANSI/ASTM A184 - Fabricated Deformed Steel Bar Mats for Concrete Reinforcement.
- G. ANSI/ASTM A185 - Welded Steel Wire Fabric for Concrete Reinforcement.
- H. ANSI/AWS D1.4 - Structural Welding Code for Reinforcing Steel.
- I. ASTM A615 - Deformed and Plain Billet Steel Bars for Concrete Reinforcement.
- J. AWS D12.1 - Welding Reinforcement Steel, Metal Inserts and Connections in Reinforced Concrete Construction.
- K. CRSI - Concrete Reinforcing Steel Institute - Manual of Standard Practice.
- L. CRSI - Placing Reinforcing Bars.

1.4 QUALITY ASSURANCE

- A. Perform Work in accordance with CRSI - Manual of Standard Practice & ACI 318.

1.5 COORDINATION

- A. Coordinate work under provisions of Section 01039.
- B. Coordinate with placement of formwork, formed openings and other Work.

**PART 2 PRODUCTS**

2.1 REINFORCEMENT

- A. Reinforcing Steel: ASTM A615, yield grade; deformed billet steel bars, unfinished.

- B. Reinforcing Steel Plain Bar and Rod Mats: ASTM A704, ASTM A615, Grade 60; steel bars or rods, unfinished.
- C. Stirrup Steel: ANSI/ASTM A82, unfinished.
- D. Welded Steel Wire Fabric: ASTM A815; in flat sheets.

## 2.2 ACCESSORY MATERIALS

- A. Tie Wire: Minimum gage annealed type.
- B. Chairs, Bolsters, Bar Supports, Spacers: Sized and shaped for strength and support of reinforcement during concrete placement conditions including load bearing pad on bottom to prevent vapor barrier puncture.
- C. Special Chairs, Bolsters, Bar Supports, Spacers Adjacent to Weather Exposed Concrete Surfaces: Plastic coated steel; size and shape as required.

## 2.3 FABRICATION

- A. Fabricate concrete reinforcing in accordance with CRSI Manual of Practice ACI SP-66.

# **PART 3 EXECUTION**

## 3.1 PLACEMENT

- A. Place, support and secure reinforcement against displacement. Do not deviate from required position.
- B. Do not displace or damage vapor barrier.
- C. Accommodate placement of formed openings.
- D. Conform to applicable code for concrete cover over reinforcement.

**END OF SECTION**

**03300**

**CAST-IN-PLACE CONCRETE**

**PART 1 GENERAL**

1.1 SECTION INCLUDES

- A. Cast-In-Place Concrete floors, shear walls, foundation walls and supported slabs.
- B. Floors and slabs on grade.
- C. Control, expansion and contraction joint devices associated with concrete work, including joint sealants.
- D. Equipment pads, light pole base, flagpole base, thrust blocks and manholes.

1.2 PRODUCTS FURNISHED BUT NOT INSTALLED UNDER THIS SECTION

- A. Section 03100 - Concrete Formwork: Placement of joint device anchors in formwork.

1.3 RELATED SECTIONS

- A. Section 03100 - Concrete Formwork: Formwork and accessories.
- B. Section 03200 - Concrete Reinforcement.
- C. Section 03346 - Concrete Floor Finishing.
- D. Section 03370 - Concrete Curing.
- E. Section 07900 - Joint Sealers.

1.4 REFERENCES

- A. ACI 301 - Structural Concrete for Buildings.
- B. ACI 302 - Guide for Concrete Floor and Slab Construction.
- C. ACI 304 - Recommended Practice for Measuring, Mixing, Transporting and Placing Concrete.
- D. ACI 305R - Hot Weather Concreting.
- E. ACI 306R - Cold Weather Concreting.
- F. ACI 318 - Building Code Requirements for Reinforced Concrete.
- G. ANSI/ASTM D994 - Preformed Expansion Joint Filler for Concrete (Bituminous Type).
- H. ANSI/ASTM D1190 - Concrete Joint Sealer, Hot-Poured Elastic Type.
- I. ANSI/ASTM D1751 - Preformed Expansion Joint Fillers for Concrete Paving and Structural Construction (Non-extruding and Resilient Bituminous Types).
- J. ANSI/ASTM D1752 - Preformed Sponge Rubber and Cork Expansion Joint Fillers for Concrete Paving and Structural Construction.
- K. ASTM C33 - Concrete Aggregates.
- L. ASTM C94 - Ready-Mixed Concrete.
- M. ASTM C150 - Portland cement.

N. ASTM C260 - Air Entraining Admixtures for Concrete.

#### 1.5 SUBMITTALS

- A. Submit under provisions of Section 01300.
- B. Product Data: Provide data on joint devices, attachment accessories and admixtures.

#### 1.6 QUALITY ASSURANCE

- A. Perform Work in accordance with ACI 301.

#### 1.7 COORDINATION

- A. Coordinate work under provisions of Section 01039.
- B. Coordinate the placement of joint devices with erection of concrete formwork and placement of form accessories.

### **PART 2 PRODUCTS**

#### 2.1 CONCRETE MATERIALS

- A. Cement: ASTM C150, Type I - Normal, Type II - Moderate, Type V - Sulfate Resistant.
- B. Fine and Coarse Aggregates: ASTM C33.
- C. Water: Clean and not detrimental to concrete.

#### 2.2 ADMIXTURES

- A. Air Entrainment: ASTM C260.

#### 2.3 ACCESSORIES

- A. Bonding Agent: Polymer resin emulsion.
- B. Vapor Barrier: thick clear polyethylene film.
- C. Non-Shrink Grout: Premixed compound consisting of non-metallic aggregate, cement, water reducing and plasticizing agents; capable of developing minimum compressive strength of 2,400 psi in 48 hours and 7,000 psi in 28 days.

#### 2.4 JOINT DEVICES AND FILLER MATERIALS

- A. Joint Filler Type A: ASTM D1751; ASTM D994; Asphalt impregnated fiberboard or felt, 1/2" thick; tongue and groove profile.
- B. Joint Filler Type B: ASTM D1752; Closed cell polyvinyl chloride foam, resiliency recovery of 95 percent if not compressed more than 50 percent of original thickness.
- C. Joint Filler Type C: ASTM D1752; Pre-molded sponge rubber fully compressible with recovery rate of minimum 95 percent.
- D. Expansion Joint Devices: ASTM B221 alloy, extruded aluminum; resilient filler strip with a Shore A hardness of 35 to permit plus or minus 25 percent joint movement with full recovery; extruded aluminum cover plate, of longest manufactured length at each location, flush Mounted, color as selected.
- E. Sealant: ASTM D1190; polymer based asphalt or coal tar and rubber compound.

#### 2.5 CONCRETE MIX

- A. All concrete shall be Type 1 cement with a compressive strength of 4,000 p.s.i. at 28 days.
- B. Mix concrete in accordance with ACI 304. Deliver concrete in accordance with ASTM C94.

- C. Use accelerating admixtures in cold weather only when approved by Architect/Engineer. Use of admixtures will not relax cold weather placement requirements.
- D. Use calcium chloride only when approved by Architect/Engineer.
- E. Use set retarding admixtures during hot weather only when approved by Architect/Engineer.
- F. Add air entraining agent to normal weight concrete mix for work exposed to exterior.

### **PART 3 EXECUTION**

#### **3.1 EXAMINATION**

- A. Verify site conditions under provisions of Section 01039.
- B. Verify requirements for concrete cover over reinforcement.
- C. Verify that anchors, seats, plates, reinforcement and other items to be cast into concrete are accurately placed, positioned securely and will not cause hardship in placing concrete.

#### **3.2 PREPARATION**

- A. Prepare previously placed concrete by cleaning with steel brush and applying bonding agent in accordance with manufacturer's instructions.
- B. In locations where new concrete is dowelled to existing work, drill holes in existing concrete, insert steel dowels and pack solid with non-shrink grout.

#### **3.3 PLACING CONCRETE**

- A. Place concrete in accordance with ACI 304 & ACI 301.
- B. Notify Architect/Engineer minimum 24 hours prior to commencement of operations.
- C. Ensure reinforcement, inserts, embedded parts, formed expansion and contraction joints are not disturbed during concrete placement.
- D. Separate slabs on grade from vertical surfaces with ½" thick joint filler.
- E. Place joint filler in floor slab pattern placement sequence. Set top to required elevations. Secure to resist movement by wet concrete.
- F. Extend joint filler from bottom of slab to within 1/2 inch of finished slab surface. Conform to Section 07900 for finish joint sealer requirements.
- G. Install joint devices in accordance with manufacturer's instructions.
- H. Install construction joint devices in coordination with floor slab pattern placement sequence. Set top to required elevations. Secure to resist movement by wet concrete.
- I. Install joint device anchors. Maintain correct position to allow joint cover to be flush with floor and wall finish.
- J. Install joint covers in longest practical length, when adjacent construction activity is complete.
- K. Apply sealants in joint devices in accordance with Section 07900.
- L. Place concrete continuously between predetermined expansion, control and construction joints.
- M. Do not interrupt successive placement; do not permit cold joints to occur.
- N. Place floor slabs in pattern indicated on drawings.

- O. Saw cut joints within 24 hours after placing. Use 3/16" thick blade, cut into 1/4 depth of slab thickness. If in-slab-heating is used cut joints 1/2 inch deep
  - P. Screed floors and slabs on grade level, maintaining surface flatness of maximum.
- 3.4 SEPARATE FLOOR TOPPINGS
- A. Prior to placing floor topping, roughen substrate concrete surface and remove deleterious material. Broom and vacuum clean.
  - B. Place required dividers, edge strips, reinforcing, and other items to be cast in.
  - C. Apply bonding agent to substrate in accordance with manufacturer's instructions.
- 3.5 CONCRETE FINISHING
- A. Provide formed concrete surfaces to be left exposed with smooth rubbed finish.
  - B. Finish concrete floor surfaces to requirements of Section 03346.
- 3.6 CURING AND PROTECTION
- A. Immediately after placement, protect concrete from premature drying, excessively hot or cold temperatures, and mechanical injury.
  - B. Maintain concrete with minimal moisture loss at relatively constant temperature for period necessary for hydration of cement and hardening of concrete.
  - C. Cure concrete floor surfaces to requirements of Section 03370.
  - D. Cure floor surfaces in accordance with ACI 308.
- 3.7 FIELD QUALITY CONTROL
- A. Field inspection and testing will be performed in accordance with ACI 301 and under provisions of Section 01400.
  - B. Provide free access to Work and cooperate with appointed firm.
  - C. Submit proposed mix design to architect for review prior to commencement of Work.
  - D. Tests of cement and aggregates may be performed to ensure conformance with specified requirements.
  - E. Three concrete test cylinders will be taken for every 75 or less cu yards of concrete placed.
  - F. One additional test cylinder will be taken during cold weather concreting, cured on job site under same conditions as concrete it represents.
  - G. One slump test will be taken for each set of test cylinders taken.
- 3.8 PATCHING
- A. Allow Architect/Engineer to inspect concrete surfaces immediately upon removal of forms.
  - B. Excessive honeycomb or embedded debris in concrete is not acceptable. Notify Architect/Engineer upon discovery.
  - C. Patch imperfections as directed.
- 3.9 DEFECTIVE CONCRETE
- A. Defective Concrete: Concrete not conforming to required lines, details, dimensions, tolerances or specified requirements.
  - B. Repair or replacement of defective concrete will be determined by the Architect/Engineer.
  - C. Do not patch, fill, touch-up, repair, or replace exposed concrete except upon express direction of Architect/Engineer for each individual area.

**END OF SECTION**

**CONCRETE FLOOR FINISHING**

**PART 1 GENERAL**

1.1 SECTION INCLUDES

- A. Finishing slabs-on-grade.
- B. Surface treatment with concrete hardener, non-skid finish and sealer.

1.2 RELATED SECTIONS

- A. Section 03300 - Cast-in-Place Concrete: Prepared concrete floors ready to receive finish; control and formed expansion and contraction joints and joint devices.
- B. Section 03370 - Concrete Curing.
- C. Section 07900 - Joint Sealers.

1.3 REFERENCES

- A. ACI 301 - Structural Concrete for Buildings.
- B. ACI 302 - Guide for Concrete Floor and Slab Construction.
- C. ASTM E1155 - Determining Floor Flatness and Levelness Using the F-Number System.

1.4 SUBMITTALS

- A. Submit under provisions of Section 01300.
- B. Product Data: Provide data on concrete hardener, sealer and slip resistant treatment, compatibilities and limitations.

1.5 MAINTENANCE DATA

- A. Submit under provisions of Section 01700.
- B. Maintenance Data: Provide data on maintenance renewal of applied coatings.

1.6 QUALITY ASSURANCE

- A. Perform Work in accordance with ACI 301 and ACI 302.

1.7 DELIVERY, STORAGE AND HANDLING

- A. Deliver, store, protect, and handle products to site under provisions of Section 01039.
- B. Deliver materials in manufacturer's packaging including application instructions.

1.8 ENVIRONMENTAL REQUIREMENTS

- A. Temporary Lighting: Minimum 200 W light source, placed above the floor surface for each 100 square feet of floor being finished.
- B. Do not finish floors until the interior heating system is operational.
- C. Ventilation: Sufficient to prevent injurious gases from temporary heat or other sources affecting concrete.

1.9 COORDINATION

- A. Coordinate work under provisions of Section 01039.
- B. Coordinate the work with concrete floor placement and concrete floor curing.

**PART 2 PRODUCTS**

2.1 CURING/SEALING COMPOUNDS

- A. Curing/sealing compound equal to Ashford Formula as distributed by:  
Curecrete Chemical Company, Inc.  
1201 W. Spring Creek Place  
Springville, UT 84663  
(801) 489-5663

**PART 3 EXECUTION**

3.1 EXAMINATION

- A. Verify site conditions under provisions of Section 01039.
- B. Verify that floor surfaces are acceptable to receive the work of this section.

3.2 FLOOR FINISHING

- A. Finish concrete floor surfaces in accordance with ACI 301 and ACI 302.
- B. Steel trowel surfaces that will receive carpeting, resilient flooring and seamless flooring.
- C. Steel trowel surfaces that areas scheduled to be exposed.
- D. In areas with floor drains, maintain design floor elevation at walls; slope surfaces uniformly to drains at nominal.

3.3 FLOOR SURFACE TREATMENT

- A. Apply sealer in accordance with manufacturer's instructions on floor surfaces.

3.4 TOLERANCES

- A. Maximum Variation of Surface Flatness for Exposed Concrete Floors: 1/4 inch.
- B. Maximum Variation of Surface Flatness under Seamless Resilient Flooring: 1/8 in.
- C. Maximum Variation of Surface Flatness under Carpeting: 1/8 in.

**END OF SECTION**

**03370**

**CONCRETE CURING**

**PART 1 GENERAL**

1.1 SECTION INCLUDES

- A. Initial and final curing of horizontal and vertical concrete surfaces.

1.2 RELATED SECTIONS

- A. Section 03300 - Cast-In-Place Concrete.
- B. Section 03346 - Concrete Floor Finishing.

1.3 REFERENCES

- A. ACI 301 - Structural Concrete for Buildings.
- B. ACI 302 - Recommended Practice for Concrete Floor and Slab Construction.
- C. ACI 308 - Standard Practice for Curing Concrete.
- D. ASTM C309 - Liquid Membrane-Forming Compounds for Curing Concrete.
- E. ASTM D2103 - Polyethylene Film and Sheeting.

1.4 QUALITY ASSURANCE

- A. Perform Work in accordance with ACI 301 and ACI 302.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Deliver, store, protect, and handle products under provisions of Section 01600.
- B. Deliver curing materials in manufacturer's packaging including application instructions.

**PART 2 PRODUCTS**

2.1 MATERIALS

- A. Curing/sealing compound equal to Ashford Formula as distributed by:  
Curecrete Chemical Company, Inc.  
1201 W. Spring Creek Place  
Springville, UT 84663  
(801)489-5663

**PART 3 EXECUTION**

3.1 EXAMINATION

- A. Verify substrate conditions under provisions of Section 01039.
- B. Verify that substrate surfaces are ready to be cured.

3.2 EXECUTION - HORIZONTAL SURFACES

- A. Cure floor surfaces in accordance with ACI 308.

3.3 EXECUTION - VERTICAL SURFACES

- A. Cure surfaces in accordance with ACI 308.

3.4 PROTECTION OF FINISHED WORK

- A. Protect finished Work under provisions of Section 01500.
- B. Do not permit traffic over unprotected floor surface.

**END OF SECTION**

## 05500

### METAL FABRICATIONS

#### PART 1 GENERAL

##### 1.1 SECTION INCLUDES

- A. Shop fabricated ferrous metal items.
- B. Shop fabricated aluminum items. N.I.C.

##### 1.2 RELATED SECTIONS

- A. Section 05520 - Handrails and Railings.
- B. Section 09900 - Painting: Paint finish.
- C. Section 03300 - Cast-In-Place Concrete: Placement of metal fabrications in concrete.
- D. Section 04300 - Unit Masonry System: Placement of metal fabrications in masonry.

##### 1.3 REFERENCES

- A. ASTM A36 - Structural Steel.
- B. ASTM A53 - Hot-Dipped, Zinc-coated Welded and Seamless Steel Pipe.
- C. ASTM A123 - Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products.
- D. ASTM A283 - Carbon Steel Plates, Shapes and Bars.
- E. ASTM A307 - Carbon Steel Bolts and Studs, 60,000 p.s.i Tensile Strength.
- F. ASTM A500 - Cold-Formed Welded and Seamless Carbon Steel Structural Tubing in Round and Shapes.
- G. ASTM A501 - Hot-Formed Welded and Seamless Carbon Steel Structural Tubing.
- H. AWS A2.0 - Standard Welding Symbols.
- I. AWS D1.1 - Structural Welding Code.
- J. SSPC (Steel Structures Painting Council) - Steel Structures Painting Manual.

#### PART 2 PRODUCTS

##### 2.1 MATERIALS - STEEL

- A. Steel Sections: ASTM A36.
- B. Steel Tubing: ASTM A500, Grade B.
- C. Plates: ASTM A283.
- D. Pipe: ASTM A53, Grade B, Schedule 40.
- E. Bolts, Nuts, and Washers: ASTM A325 galvanized to ASTM A153 for galvanized components.
- F. Welding Materials: AWS D1.1; type required for materials being welded.
- G. Ladders: ANSI A14.3.
- H. Shop and Touch-Up Primer: SSPC 15, Type 1, red oxide.

##### 2.2 FABRICATION

- A. Fit and shop assemble items in largest practical sections, for delivery to site.
- B. Fabricate items with joints tightly fitted and secured.
- C. Grind exposed joints flush and smooth with adjacent finish surface. Make exposed joints butt tight, flush and hairline. Ease exposed edges to small uniform radius.
- D. Exposed Mechanical Fastenings: Flush countersunk screws or bolts; unobtrusively located; consistent with design of component, except where specifically noted otherwise.
- E. Supply components required for anchorage of fabrications. Fabricate anchors and related components of same material and finish as fabrication, except where specifically noted otherwise.

### 2.3 FABRICATION TOLERANCES

- A. Squareness: 1/8-inch maximum difference in diagonal measurements.
- B. Maximum Offset Between Faces: 1/16 inch.
- C. Maximum Misalignment of Adjacent Members: 1/16 inch.
- D. Maximum Bow: 1/8 inch in 48 inches.
- E. Maximum Deviation from Plane: 1/16 inch in 48 inches.

### 2.4 FINISHES - STEEL

- A. Clean surfaces of rust, scale, grease, and foreign matter prior to finishing.
- B. Do not prime surfaces in direct contact with concrete or where field welding is required.
- C. Prime paint items with one coat.
- D. Structural Steel Members: Galvanize after fabrication to ASTM A123. [Provide minimum 1.25 oz/sq ft galvanized coating.]
- E. Non-structural Items: Galvanized after fabrication to ASTM A123. Provide minimum 1.25 oz/sq ft galvanized coating.
- F. Chrome Plating: ASTM B177, weight, nickel-chromium alloy, satin finish.

## **PART 3 EXECUTION**

### 3.1 EXAMINATION

- A. Verify that field conditions are acceptable and are ready to receive work.

### 3.2 PREPARATION

- A. Clean and strip primed steel items to bare metal where site welding is required.
- B. Supply steel items required to be cast into concrete or embedded in masonry with setting templates to appropriate sections.

### 3.3 INSTALLATION

- A. Install items plumb and level, accurately fitted, free from distortion or defects.
- B. Provide for erection loads, and for sufficient temporary bracing to maintain true alignment until completion of erection and installation of permanent attachments.
- C. Field weld components indicated on Drawings.
- D. Perform field welding in accordance with AWS D1.1.
- E. Obtain approval prior to site cutting or making adjustments not scheduled.
- F. After erection, prime welds, abrasions, and surfaces not shop primed or galvanized, except surfaces to be in contact with concrete.

### 3.4 ERECTION TOLERANCES

- A. Maximum Variation from Plumb: 1/4 inch per story, non-cumulative.
- B. Maximum Offset from True Alignment: 1/4 inch.
- C. Maximum Out-of-Position: 1/4 inch.

**END OF SECTION**

**07900**

**JOINT SEALERS**

**PART 1 GENERAL**

1.1 SECTION INCLUDES

- A. Sealants and joint backing.
- B. Precompressed foam sealers.

1.2 REFERENCES

- A. ASTM C834 - Standard Specification for Latex Sealing Compounds.
- B. ASTM C920 - Standard Specification for Elastomeric Joint Sealants.
- C. ASTM C1193 - Standard Guide for Use of Joint Sealants.
- D. ASTM D1056 - Standard Specification for Flexible Cellular Materials - Sponge or Expanded Rubber.
- E. ASTM D1565 - Standard Specification for Flexible Cellular Materials -Vinyl Chloride Polymers and Copolymers (Open-Cell Foam).
- F. ASTM D1667 - Standard Specification for Flexible Cellular Materials -Vinyl Chloride Polymers and Copolymers (Closed-Cell Foam).

1.3 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing the Products specified in this section with minimum three years experience.
- B. Applicator Qualifications: Company specializing in performing the work of this section and approved by manufacturer.

1.4 ENVIRONMENTAL REQUIREMENTS

- A. Maintain temperature and humidity recommended by the sealant manufacturer during and after installation.

1.5 COORDINATION

- A. Section 01039 - Coordination and Meetings: Coordination requirements.
- B. Coordinate the work with all sections referencing this section.

1.6 WARRANTY

- A. Section 01700 - Warranties.
- B. Correct defective work within a five-year period after Date of Substantial Completion.
- C. Warranty: Include coverage for installed sealants and accessories which fail to achieve airtight seal and exhibit loss of adhesion or cohesion or do not cure.

1.7 SEALANTS

- A. Type I - General Purpose Exterior Sealant: Polyurethane or Polysulfide; ASTM C920, Grade NS, Class 25, Uses M, G and A; single or multi- component.
  - 1. Standard colors matching finished surfaces.

- B. Type II - Exterior Expansion Joint Sealer: Precompressed foam sealer; urethane with water-repellent:
  - 1. Face color: Gray.
  - 2. Size as required providing watertight seal when installed.
  - 3. Provide product recommended by manufacturer for traffic-bearing use.
  - 4. Applications: Use for:
    - a. Exterior wall expansion joints
    - b. Paving surface joints
    - c. Set in floor components
  
- C. Type III - Concrete Paving Joint Sealant: Polyurethane, self-leveling; ASTM C920, Class 25, Uses T, M and A; single or multi-] component.
  - 1. Gray color.
  - 2. Applications: Use for:
    - a. Joints in sidewalks and vehicular paving.

## **PART 2 PRODUCTS**

### **2.1 ACCESSORIES**

- A. Primer: Non-staining type, recommended by sealant manufacturer to suit application.
- B. Joint Cleaner: Non-corrosive and non-staining type, recommended by sealant manufacturer; compatible with joint forming materials.
- C. Joint Backing: Round foam rod compatible with sealant; ASTM D1056, sponge or expanded rubber; oversized 30 to 50 percent larger than joint width.
- D. Bond Breaker: Pressure sensitive tape recommended by sealant manufacturer to suit application.

## **PART 3 EXECUTION**

### **3.1 EXAMINATION**

- A. Verify that substrate surfaces and joint openings are ready to receive work.
- B. Verify that joint backing and release tapes are compatible with sealant.

### **3.2 PREPARATION**

- A. Remove loose materials and foreign matter that might impair adhesion of sealant.
- B. Clean and prime joints in accordance with manufacturer's instructions.
- C. Perform preparation in accordance with manufacturer's instructions and ASTM C1193.
- D. Protect elements surrounding the work of this section from damage or disfiguration.

### **3.3 INSTALLATION**

- A. Perform installation in accordance with sealant manufacturer's requirements for preparation of surfaces and material installation instructions.
- B. Perform installation in accordance with ASTM C1193.
- C. Measure joint dimensions and size joint backers to achieve width-to-depth ratio, neck dimension, and surface bond area as recommended by manufacturer, except where specific dimensions are indicated.
- D. Install bond breaker where joint backing is not used.
- E. Install sealant free of air pockets, foreign embedded matter, ridges and sags.
- F. Apply sealant within recommended application temperature ranges. Consult manufacturer when sealant cannot be applied within these temperature ranges.
- G. Tool joints concave.

- H. Precompressed Foam Sealant: Do not stretch; avoid joints except at corners, ends, and intersections; install with face 1/8 to 1/4 inch below adjoining surface.
- I. Compression Gaskets: Avoid joints except at ends, corners, and intersections; seal all joints with adhesive; install with face 1/8 to 1/4 inch below adjoining surface.

3.4 CLEANING

- A. Clean adjacent soiled surfaces.

3.5 PROTECTION OF FINISHED WORK

- A. Protect sealants until cured.

**END OF SECTION**

## 09900

### PAINTING

#### PART 1 GENERAL

##### 1.1 SECTION INCLUDES

- A. Surface preparation.
- B. Field application of paints, stains, varnishes and other coatings.

##### 1.2 RELATED SECTIONS

- A. Section 05500 - Metal Fabrications: Shop primed items.

##### 1.3 REFERENCES

- A. ASTM D16 - Standard Terminology Relating to Paint, Varnish, Lacquer and Related Products.
- B. ASTM D4442 - Standard Test Methods for Direct Moisture Content Measurement of Wood and Wood-Base Materials.
- C. NACE (National Association of Corrosion Engineers) - Industrial Maintenance Painting.
- D. NPCA - Guide to U.S. Government Paint Specifications; National Paint and Coatings Association.
- E. PDCA - Architectural Specifications Manual; Painting and Decorating Contractors of America.
- F. SSPC - Steel Structures Painting Manual; Steel Structures Painting Council.

##### 1.4 DEFINITIONS

- A. Conform to ASTM D16 for interpretation of terms used in this section.

##### 1.5 SUBMITTALS FOR REVIEW

- A. Section 01300 - Submittals: Procedures for submittals.
- B. Samples:
  - 1. Submit two paper chip samples, 2 x 4 inches in size illustrating range of colors and textures available for each surface finishing product scheduled.

##### 1.6 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing the Products specified in this section with minimum three years documented experience.
- B. Applicator Qualifications: Company specializing in performing the work of this section with minimum three years experience.

##### 1.7 DELIVERY, STORAGE AND PROTECTION

- A. Section 01600 - Material and Equipment: Transport, handle, store and protect products.
- B. Deliver products to site in sealed and labeled containers; inspect to verify acceptability.
- C. Container Label: Include manufacturer's name, type of paint, brand name, lot number, brand code, coverage, surface preparation, drying time, cleanup requirements, color designation and instructions for mixing and reducing.
- D. Paint Materials: Store at minimum ambient temperature of 45 degrees F and a maximum of 90 degrees F, in ventilated area, and as required by manufacturer's instructions.

## 1.8 ENVIRONMENTAL REQUIREMENTS

- A. Section 01600 - Material and Equipment: Environmental conditions affecting products on site.
- B. Do not apply materials when surface and ambient temperatures are outside the temperature ranges required by the paint product manufacturer.
- C. Do not apply exterior coatings during rain or snow or when relative humidity is outside the humidity ranges required by the paint product manufacturer.
- D. Minimum Application Temperatures for Latex Paints: 45 degrees F for interiors; 50 degrees F for exterior, unless required otherwise by manufacturer's instructions.
- E. Minimum Application Temperature for Varnish Finishes: 65 degrees F for interior or exterior, unless required otherwise by manufacturer's instructions.
- F. Provide lighting level of 80 ft candles measured mid-height at substrate surface.

## 1.9 PROJECT CONDITIONS

- A. Section 01039 - Coordination and Meetings.
- B. Sequence application to the following:
  - 1. Do not apply finish coats until paintable sealant is applied.
  - 2. Back prime wood trim before installation of trim.

## 1.10 EXTRA MATERIALS

- A. Section 01730 - Operation and Maintenance Data.
- B. Supply 1 gallons of each color, type and surface texture; store where directed.
- C. Label each container with color, type, texture and room locations in addition to the manufacturer's label.

## **PART 2 PRODUCTS**

### 2.1 MATERIALS

- A. Coatings: Ready mixed, except field-catalyzed coatings. Prepare pigments:
  - 1. To a soft paste consistency, capable of being readily and uniformly dispersed to a homogeneous coating.
  - 2. For good flow and brushing properties.
  - 3. Capable of drying or curing free of streaks or sags.
- B. Accessory Materials: Linseed oil, shellac, turpentine, paint thinners and other materials not specifically indicated but required to achieve the finishes specified; commercial quality.
- C. Patching Materials: Latex filler.
- D. Fastener Head Cover Materials: Latex filler.

### 2.2 FINISHES

- A. Refer to drawings for surface finish.

### 2.3 BRAND OF PAINT

- A. Sherwin-Williams or equal.

## **PART 3 EXECUTION**

### 3.1 EXAMINATION

- A. Section 01039 - Coordination and Meetings: Verification of existing conditions before starting Work.

- B. Verify that surfaces and substrate conditions are ready to receive Work as instructed by the product manufacturer.
- C. Examine surfaces scheduled to be finished prior to commencement of work. Report any condition that may potentially affect proper application.
- D. Test shop applied primer for compatibility with subsequent cover materials.

### 3.2 PREPARATION

- A. Surface Appurtenances: Remove or mask electrical plates, hardware, light fixture trim, escutcheons and fittings prior to preparing surfaces or finishing.
- B. Surfaces: Correct defects and clean surfaces that affect work of this section.
- C. Marks: Seal with shellac those that may bleed through surface finishes.
- D. Impervious Surfaces: Remove mildew by scrubbing with solution of tri-sodium phosphate and bleach. Rinse with clean water and allow surface to dry.
- E. Uncoated Steel and Iron Surfaces: Remove grease, mill scale, weld splatter, dirt and rust. Where heavy coatings of scale are evident, remove by [hand] [power tool] wire brushing or sandblasting; clean by washing with solvent. Apply a treatment of phosphoric acid solution, ensuring weld joints, bolts and nuts are similarly cleaned. Spot prime paint after repairs.
- F. Shop Primed Steel Surfaces: Sand and scrape to remove loose primer and rust. Feather edges to make touch-up patches inconspicuous. Clean surfaces with a solvent. Prime paint bare steel surfaces.

### 3.3 APPLICATION

- A. Apply products in accordance with manufacturer's instructions.
- B. Do not apply finishes to surfaces that are not dry. Allow applied coats to dry before next coat is applied.
- C. Apply each coat to uniform appearance. Apply each coat of paint slightly darker than preceding coat unless otherwise approved.
- D. Vacuum clean surfaces of loose particles. Use tack cloth to remove dust and particles just prior to applying next coat.

### 3.4 CLEANING

- A. Collect waste material that may constitute a fire hazard, place in closed metal containers and remove daily from site.

### 3.5 SCHEDULE - EXTERIOR SURFACES

- A. Steel - Unprimed:
  - 1. One coat of alkyd primer.
  - 2. Two coats of alkyd enamel, gloss.
- B. Steel - Shop Primed:
  - 1. Touch-up with zinc chromate primer.
  - 2. Two coats of alkyd enamel, gloss.


**END OF SECTION**



# Missouri

## Division of Labor Standards

WAGE AND HOUR SECTION

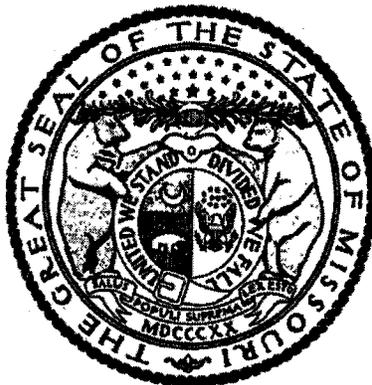

JEREMIAH W. (JAY) NIXON, Governor

## Annual Wage Order No. 18

Section 027

### COOPER COUNTY

In accordance with Section 290.262 RSMo 2000, within thirty (30) days after a certified copy of this Annual Wage Order has been filed with the Secretary of State as indicated below, any person who may be affected by this Annual Wage Order may object by filing an objection in triplicate with the Labor and Industrial Relations Commission, P.O. Box 599, Jefferson City, MO 65102-0599. Such objections must set forth in writing the specific grounds of objection. Each objection shall certify that a copy has been furnished to the Division of Labor Standards, P.O. Box 449, Jefferson City, MO 65102-0449 pursuant to 8 CSR 20-5.010(1). A certified copy of the Annual Wage Order has been filed with the Secretary of State of Missouri.

Original Signed by

Carla Buschjost, Director  
Division of Labor Standards

This Is A True And Accurate Copy Which Was Filed With The Secretary of State: March 10, 2011

Last Date Objections May Be Filed: April 11, 2011

Prepared by Missouri Department of Labor and Industrial Relations

OCCUPATIONAL TITLE	** Date of Increase	*	Basic Hourly Rates	Over-Time Schedule	Holiday Schedule	Total Fringe Benefits
Asbestos Worker			\$34.04	52	53	\$22.88
Boilermaker			\$32.31	57	7	\$23.95
Bricklayers-Stone Mason			\$28.20	59	7	\$14.33
Carpenter			\$23.59	60	15	\$11.85
Cement Mason			\$25.08	9	3	\$9.65
Electrician (Inside Wireman)			\$33.83	13	72	\$15.25 + 10%
Communication Technician			USE ELECTRICIAN (INSIDE WIREMAN) RATE			
Elevator Constructor		a	\$40.860	26	54	\$23.255
Operating Engineer						
Group I			\$32.66	85	4	\$13.00
Group II			\$44.49	FED		\$3.54
Group III			\$26.30	85	4	\$13.00
Group III-A			\$30.51	85	4	\$13.00
Group IV						
Group V			\$27.90	85	4	\$13.00
Pipe Fitter		b	\$34.00	91	69	\$21.43
Glazier			\$19.38	88	32	\$15.67
Laborer (Building):						
General			\$20.36	42	44	\$10.94
First Semi-Skilled			\$22.36	42	44	\$10.94
Second Semi-Skilled			\$21.36	42	44	\$10.94
Lather			USE CARPENTER RATE			
Linoleum Layer & Cutter			USE CARPENTER RATE			
Marble Mason			\$20.62	124	74	\$12.68
Millwright			\$24.59	60	15	\$11.85
Iron Worker			\$25.00	50	4	\$22.90
Painter			\$20.40	18	7	\$10.57
Plasterer			\$24.29	94	5	\$12.12
Plumber			\$47.95	FED		\$3.54
Pile Driver			\$24.59	60	15	\$11.85
Roofer			\$27.90	12	4	\$12.59
Sheet Metal Worker			\$28.90	40	23	\$13.35
Sprinkler Fitter			\$30.84	33	19	\$16.95
Terrazzo Worker			\$27.48	124	74	\$14.32
Tile Setter			\$20.62	124	74	\$12.68
Truck Driver-Teamster						
Group I			\$26.27	31	35	\$9.85
Group II			\$26.43	31	35	\$9.85
Group III			\$26.42	31	35	\$9.85
Goup IV			\$26.54	31	35	\$9.85
Traffic Control Service Driver						
Welders-Acetylene & Electric		*				

Fringe Benefit Percentage is of the Basic Hourly Rate

Attention Workers: If you are not being paid the appropriate wage rate and fringe benefits contact the Division of Labor Standards at (573) 751-3403.



**COOPER COUNTY  
OVERTIME SCHEDULE - BUILDING CONSTRUCTION**

**FED:** Minimum requirement per Fair Labor Standards Act means time and one-half (1 ½) shall be paid for all work in excess of forty (40) hours per work week.

**NO. 9:** Means the regular workday starting time of 8:00 a.m. (and resulting quitting time of 4:30 p.m.) may be moved forward to 6:00 a.m. or delayed one hour to 9:00 a.m. All work performed in excess of the regular work day and on Saturday shall be compensated at one and one-half (1½) times the regular pay. In the event time is lost during the work week due to weather conditions, the Employer may schedule work on the following Saturday at straight time. All work accomplished on Sunday and holidays shall be compensated for at double the regular rate of wages. The work week shall be Monday through Friday, except for midweek holidays.

**NO. 12:** Means the work week shall commence on Monday at 12:01 a.m. and shall continue through the following Friday, inclusive of each week. All work performed by employees anywhere in excess of forty (40) hours in one (1) work week, shall be paid for at the rate of one and one-half (1½) times the regular hourly wage scale. All work performed within the regular working hours which shall consist of a ten (10) hour work day except in emergency situations. Overtime work and Saturday work shall be paid at one and one-half (1½) times the regular hourly rate. Work on recognized holidays and Sundays shall be paid at two (2) times the regular hourly rate.

**NO. 13:** Means a regular workday shall consist of eight (8) hours between 8:00 a.m. and 4:30 p.m. Forty (40) hours, within five (5) days -- Monday through Friday inclusive -- shall constitute the regular workweek. The Employer may alter the above stated hours by two (2) hours for an early starting and quitting time only, not to exceed eight (8) hours of work in any one day. When job conditions dictate and as required by the customer, the Employer shall be allowed to establish a four (4) day, ten (10) hour per day work week. This work week is defined as Monday through Thursday, with a Friday make-up day. The normal work day under a ten (10) hour four (4) day work week shall be from 7:00 a.m. to 6:00 p.m., with a one hour starting variance. The make-up day of Friday shall be instituted for specific reasons such as loss of production due to weather and/or holidays. All hours worked in excess of ten (10) hours per day or forty (40) hours per week or hours worked outside the normal work week shall be paid at the applicable overtime rate. The first four (4) hours of overtime after the normal workday, each day Monday through Friday and the first ten (10) hours of overtime on Saturdays shall be paid for at one and one-half (1½) times the regular straight time rate of pay. All other work performed outside of the regularly scheduled working hours and outside of the first ten (10) hours worked on Saturdays shall be paid for at double (2) the regular straight time rate of pay. Sundays and the recognized holidays shall be paid for at double (2) the regular straight time rate of pay, if worked. When so elected by the contractor, multiple shifts of at least five (5) days duration may be worked. When two (2) or three (3) shifts are worked: The first shift (day shift) shall be worked between the hours of 8:00 a.m. and 4:30 p.m. Workmen on the "day shift" shall receive eight (8) hours pay at the regular hourly rate for eight (8) hours work. The second shift (swing shift) shall be worked between the hours of 4:30 p.m. and 12:30 a.m. Workmen on the "swing shift" shall receive eight (8) hours pay at the regular hourly rate plus 10% for seven and one-half (7 ½) hours work. The third shift (graveyard shift) shall be worked between the hours of 12:30 a.m. and 8:00 a.m. Workmen on the "graveyard shift" shall receive eight (8) hours pay at the regular hourly rate plus 15% for seven (7) hours work. A lunch period of thirty (30) minutes shall be allowed on each shift. All overtime work required after the completion of a regular shift shall be paid at one and one-half (1½) times the "shift" hourly rate.

**NO. 18:** Means the regular work day shall be eight (8) hours. Working hours are from six (6) hours before Noon (12:00) to six (6) hours after Noon (12:00). The regular work week shall be forty (40) hours, beginning between 6:00 a.m. and 12:00 Noon on Monday and ending between 1:00 p.m. and 6:00 p.m. on Friday. Saturday will be paid at time and one-half (1½). Sunday and Holidays shall be paid at double (2) time. Saturday can be a make-up day if the weather has forced a day off, but only in the week of the day being lost. Any time before six (6) hours before Noon or six (6) hours after Noon will be paid at time and one-half (1½).

**NO. 26:** Means that the regular working day shall consist of eight (8) hours worked between 6:00 a.m., and 5:00 p.m., five (5) days per week, Monday to Friday, inclusive. Hours of work at each jobsite shall be those established by the general contractor and worked by the majority of trades. (The above working hours may be changed by mutual agreement). Work performed on Construction Work on Saturdays, Sundays and before and after the regular working day on Monday to Friday, inclusive, shall be classified as overtime, and paid for at double (2) the rate of single time. The employer may establish hours worked on a jobsite for a four (4) ten (10) hour day work week at straight time pay for construction work; the regular working day shall consist of ten (10) hours worked consecutively, between 6:00 a.m. and 6:00 p.m., four (4) days per week, Monday to Thursday, inclusive. Any work performed on Friday, Saturday, Sunday and holidays, and before and after the regular working day on Monday to Thursday where a four (4) ten (10) hour day workweek has been established, will be paid at two times (2) the single time rate of pay. The rate of pay for all work performed on holidays shall be at two times (2) the single time rate of pay.

**COOPER COUNTY  
OVERTIME SCHEDULE - BUILDING CONSTRUCTION**

**NO. 31:** Means a regular work week shall consist of not more than forty (40) hours of work and all work performed over and above ten (10) hours per day and forty (40) hours per week shall be paid at the rate of time and one-half (1½). A workday is to begin between 6:00 a.m. and 9:00 a.m. at the option of the Employer except when inclement weather or other conditions beyond the reasonable control of the Employer, in which event, the starting time may be advanced or delayed. Work performed on recognized holidays or days observed as such, shall receive time and one-half (1½).

**NO. 33:** Means the standard work day and week shall be eight (8) consecutive hours of work between the hours of 6:00 a.m. and 6:00 p.m., excluding the lunch period Monday through Friday, or shall conform to the practice on the job site. Four (4) days at ten (10) hours a day may be worked at straight time, Monday through Friday and need not be consecutive. All overtime, except for Sundays and holidays shall be at the rate of time and one-half (1½). Overtime worked on Sundays and holidays shall be at double (2) time.

**NO. 40:** Means the regular working week shall consist of five (5) consecutive (8) hour days' labor on the job beginning with Monday and ending with Friday of each week. Four (4) 10-hour days may constitute the regular work week. The regular working day shall consist of eight (8) hours labor on the job beginning as early as 7:00 a.m. and ending as late as 5:30 p.m. All full or part time labor performed during such hours shall be recognized as regular working hours and paid for at the regular hourly rate. All hours worked on Saturday and all hours worked in excess of eight (8) hours but not more than twelve (12) hours during the regular working week shall be paid for at time and one-half (1½) the regular hourly rate. All hours worked on Sundays and holidays and all hours worked in excess of twelve (12) hours during the regular working day shall be paid at two (2) times the regular hourly rate. In the event of rain, snow, cold or excessively windy weather on a regular working day, Saturday may be designated as a "make-up" day. Saturday may also be designated as a "make-up" day, for an employee who has missed a day of work for personal or other reasons. Pay for "make-up" days shall be at regular rates.

**NO. 42:** Means eight (8) hours between the hours of 8:00 a.m. and 4:30 p.m. shall constitute a work day. The starting time may be advanced one (1) or two (2) hours. Employees shall have a lunch period of thirty (30) minutes. The Employer may provide a lunch period of one (1) hour, and in that event, the workday shall commence at 8:00 a.m. and end at 5:00 p.m. The workweek shall commence at 8:00 a.m. on Monday and shall end at 4:30 p.m. on Friday (or 5:00 p.m. on Friday if the Employer grants a lunch period of one (1) hour), or as adjusted by starting time change as stated above. All work performed before 8:00 a.m. and after 4:30 p.m. (or 5:00 p.m. where one (1) hour lunch is granted for lunch) or as adjusted by starting time change as stated above or on Saturday, except as herein provided, shall be compensated at one and one-half (1½) times the regular hourly rate of pay for the work performed. All work performed on Sunday and on recognized holidays shall be compensated at double (2) the regular hourly rate of pay for the work performed. When working a five 8-hour day schedule and an Employer is prevented from working forty (40) hours, Monday through Friday, or any part thereof by reason of inclement weather (rain or mud), Saturday or any part thereof may be worked as a make-up day at the straight time rate. The Employer shall have the option of working five eight (8) hour days or four ten (10) hour days Monday through Friday. If an Employer elects to work five (5) eight (8) hour days during any work week, hours worked more than eight (8) per day or forty (40) hours per week shall be paid at time and one-half (1½) the hourly rate Monday through Friday. If an Employer elects to work four (4) ten (10) hour days in any week, work performed more than ten (10) hours per day or forty (40) hours per week shall be paid at time and one-half (1½) the hourly rate Monday through Friday. If an Employer is working ten (10) hour days and loses a day due to inclement weather, they may work ten (10) hours Friday at straight time. All hours worked over the forty (40) hours Monday through Friday will be paid at time and one-half (1½) overtime rate. Overtime shall be computed at half-hour intervals. Shift Work: Two (2) or three (3) shifts shall be permitted, provided such shifts are scheduled for a minimum of three (3) consecutive days. The second shift shall begin at 4:30 p.m. and end at 12:30 a.m. with one-half (1/2) hour for lunch between 7:30 p.m. and 9:00 p.m. and shall received eighty (8) hours' pay. The third shift shall begin at 12:30 a.m. and end at 8:00 a.m. with one-half (1/2) hour for lunch between 3:30 a.m. and 5:00 a.m. and shall received (8) hour's; pay. There shall be at least one (1) foreman on each shift on jobs where more than one shift is employed, provided that there are two (2) or more employees on second and on the third shifts. All shifts shall arrange to interchange working hours at the end of each week. When three shifts are used, the applicable rate must be paid from Saturday at 8:00 a.m. until the following Monday at 8:00 a.m. When three shifts are employed, the second and third shifts shall contain at least one-half (1/2) as many employees as the first shift.

**COOPER COUNTY  
OVERTIME SCHEDULE - BUILDING CONSTRUCTION**

**NO. 50:** Means eight (8) hours constitute a normal day's work Monday through Friday. Any time worked over eight (8) hours will normally be paid at time and one-half (1½) except for exclusions stated in some following additional sentences. The Employer, at his discretion, may start the work day between 6:00 a.m. and 9:00 a.m. Any schedule chosen shall be started at the beginning of the work week (Monday) and used for at least five days. Work may be scheduled on a four (4) days a week (Monday through Thursday) at ten (10) hours a day schedule. If such a schedule is employed, then Friday may be used as a make-up day when time is lost due to inclement weather. Time and one-half (1½) shall be paid for any work in excess of eight (8) hours in any regular work day Monday through Friday unless working 4-10's, then time and one-half (1½) after ten (10) hours. All work performed on Saturday will be time and one-half (1½). Double (2) time shall be paid for all work on Sundays and recognized holidays.

**NO. 52:** Means the regular workweek shall consist of five (5) eight (8) hour days, Monday through Friday. The regular workday shall consist of a eight (8) hour period, to be worked between the agreed upon starting time, and ending no later than 4:30 p.m. The agreed upon starting time shall be any time between the hours of 6:00 a.m. and 8:00 a.m. The option exists for the employer to use a four (4) day, ten (10) hour work week. Days worked shall be Monday through Thursday or Tuesday through Friday. If the job requires men on duty all five (5) days, then part of the crew may work the first four (4) days and the remainder of the crew may work the last four (4) days. Hours each day shall be from 7:00 a.m. to 5:30 p.m. Interested party's on the project must agree to this clause before it may be used. Once this clause has been put into effect, it shall remain as long as the majority of the Employees on the project and the Employer agree to keep it. The four (4) day clause shall not be used to circumvent a Holiday. Except as otherwise provided, all work performed outside the regular working hours and performed during the regular work week (Monday through Friday) shall be at the following rates of pay:

Holidays-New Year's Day, Memorial Day, Independence Day, Thanksgiving Day, Christmas Day (or days observed as such) shall be recognized as Holidays that shall be paid at two (2) times the regular rate of pay.

Labor Day-No work shall be performed on Labor Day except in special cases of emergency. Rate of pay shall be at three (3) times the regular rate of pay.

Overtime-Work performed outside of the regular work day (the regular work day shall consist of an eight (8) hour period, to be worked between the agreed upon starting time, and ending not later than 4:30 p.m. The agreed upon starting time shall be any time between the hours of 6:00 a.m. and 8:00 a.m., by mutual consent of the interested party's.), shall be:

- A. Hours worked Monday through Friday, the first two (2) hours of overtime will be paid at time and one-half (1½). All other overtime will be paid at the double (2) time rate.
- B. The first ten (10) hours worked on Saturday will be paid at time and one-half (1½), with all other hours to be paid at the double (2) time rate.
- C. Sundays and Holidays (except Labor Day) shall be paid at the double (2) time rate.

**NO. 57:** Means eight (8) hours per day shall constitute a day's work and forty (40) hours per week, Monday through Friday, shall constitute a week's work. The regular starting time shall be 8:00 a.m. The above may be changed by mutual consent of authorized personnel. When circumstances warrant, the Employer may change the regular workweek to four (4) ten-hour days at the regular time rate of pay. It being understood that all other pertinent information must be adjusted accordingly. All time worked before and after the established workday of eight (8) hours, Monday through Friday, all time worked on Saturday, shall be paid at the rate of time and one-half (1½) except in cases where work is part of an employee's regular Friday shift. All time worked on Sunday and recognized holidays shall be paid at the double (2) time rate of pay.

**NO. 59:** Means that except as herein provided, eight (8) hours a day shall constitute a standard work day, and forty (40) hours per week shall constitute a week's work. All time worked outside of the standard eight (8) hour work day and on Saturday shall be classified as overtime and paid the rate of time and one-half (1½). All time worked on Sunday and holidays shall be classified as overtime and paid at the rate of double (2) time. The Employer has the option of working either five (5) eight hour days or four (4) ten hour days to constitute a normal forty (40) hour work week. When the four (4) ten-hour work week is in effect, the standard work day shall be consecutive ten (10) hour periods between the hours of 6:30 a.m. and 6:30 p.m. Forty (40) hours per week shall constitute a weeks work, Monday through Thursday, inclusive. In the event the job is down for any reason beyond the Employer's control, then Friday and/or Saturday may, at the option of the Employer, be worked as a make-up day; straight time not to exceed ten (10) hours or forty (40) hours per week. When the five day eight (8) hour work week is in effect, forty (40) hours per week shall constitute a week's work, Monday through Friday, inclusive. In the event the job is down for any reason beyond the Employer's control, then Saturday may, at the option of the Employer, be worked as a make-up day; straight time not to exceed eight (8) hours or forty (40) hours per week. The regular starting time (and resulting quitting time) may be moved to 6:00 a.m. or delayed to 9:00 a.m. Make-up days shall not be utilized for days lost due to holidays.

**COOPER COUNTY  
OVERTIME SCHEDULE - BUILDING CONSTRUCTION**

**NO. 60:** Means the Employer shall have the option of working five 8-hour days or four 10-hour days Monday through Friday. If an Employer elects to work five 8-hour days during any work week, hours worked more than eight (8) per day or forty (40) per week shall be paid at time and one-half (1½) the hourly wage rate plus fringe benefits Monday through Friday. **SATURDAY MAKE-UP DAY:** If an Employer is prevented from working forty (40) hours, Monday through Friday, or any part thereof by reason of inclement weather (rain or mud), Saturday or any part thereof may be worked as a make-up day at the straight time rate. It is agreed by the parties that the make-up day is not to be used to make up time lost due to recognized holidays. If an Employer elects to work four 10-hour days, between the hours of 6:30 a.m. and 6:30 p.m. in any week, work performed more than ten (10) hours per day or forty (40) hours per week shall be paid at time and one half (1½) the hourly wage rate plus fringe benefits Monday through Friday. If an Employer is working 10-hour days and loses a day due to inclement weather, the Employer may work ten (10) hours on Friday at straight time. All hours worked over the forty (40) hours Monday through Friday will be paid at time and one-half (1½) the hourly wage rate plus fringe benefits. All Millwright work performed in excess of the regular work day and on Saturday shall be compensated for at time and one-half (1½) the regular Millwright hourly wage rate plus fringe benefits. The regular work day starting at 8:00 a.m. (and resulting quitting time of 4:30 p.m.) may be moved forward to 6:00 a.m. or delayed one (1) hour to 9:00 a.m. All work accomplished on Sundays and recognized holidays, or days observed as recognized holidays, shall be compensated for at double (2) the regular hourly rate of wages plus fringe benefits. **NOTE:** All overtime is computed on the hourly wage rate plus an amount equal to the fringe benefits.

**NO. 85:** Means the work week shall be Monday through Sunday. Eight (8) hours shall constitute a day's work to begin between 6:00 a.m. and 9:00 a.m. and end between 2:30 p.m. to 5:30 p.m. Employees required to work during their lunch period shall receive the overtime rate. Employees shall receive time and one-half (1½) for all time they are required to work prior to their normal starting time or after eight (8) hours or normal quitting time Monday through Friday, or all day on Saturday. If an Employer has started the work week on a five day, eight hours a day schedule, and due to inclement weather misses any time, then he may switch to a nine or ten hours a day schedule, at straight time, for the remainder of that work week in order to make up for the lost time (10-hour make-up day). All work over ten (10) hours a day or over forty (40) hours a week must be paid at time & one-half (1½). Sundays and recognized holidays shall be paid at the double (2) time rate of pay. A contractor may alter the regular work week to four (4) ten (10) hour days at straight time rate of pay. To do this the scheduled 4-10's must be worked at least one full week and the regular workweek shall be Monday through Thursday with Friday being a make-up day at straight time for days missed in the regular workweek due to inclement weather. If 5-8's are being worked, Saturday may be used as a make-up day at straight time if inclement weather prevents work during the normal work week.

**NO. 88:** Means the regular work week shall consist of five (5) eight (8) hour days, 8:00 a.m. to 4:30 p.m., Monday through Friday, except when the work week is scheduled as a 4-10's week or as a week with start time advanced or delayed as described below. The starting time may be advanced or delayed by one hour on either side of 8:00 a.m. The advanced or delayed starting time must run for a period of at least five (5) days. The Employer may establish a work week consisting of four (4) days, during the regular work week, each day consisting of ten (10) hours at straight time. The 4-10's must run for a period of at least four (4) days. Time and one-half (1½) shall be paid for any work in excess of eight (8) hours in any regular work day Monday through Friday (or ten hours in a 4-10's week), the first eight (8) hours of a Saturday, and it shall be at time and one-half (1½) for the Friday and Saturday following Thanksgiving. Double (2) time shall be paid for the following time worked on Sunday, New Year's Day, Memorial Day, Fourth of July, Labor Day, Thanksgiving Day and Christmas Day, as well as any work in excess of eight (8) hours on a Saturday and the Saturday of a three-day weekend (except the Saturday following Thanksgiving).

**COOPER COUNTY  
OVERTIME SCHEDULE - BUILDING CONSTRUCTION**

**NO. 91:** Means eight (8) hours shall constitute a day's work commencing at 8:00 a.m. and ending at 4:30 p.m., allowing one-half (½) hour for lunch. The option exists for the Employer to use a flexible starting time between the hours of 6:00 a.m. and 9:00 a.m. The regular workweek shall consist of forty (40) hours of five (5) workdays, Monday through Friday. The workweek may consist of four (4) ten (10) hour days from Monday through Thursday, with Friday as a make-up day. If the make-up day is a holiday, the employee shall be paid at the double (2) time rate. The employees shall be paid time and one-half (1½) for work performed on Saturdays, before the regular starting time or after the regular quitting time or over eight (8) hours per work day (unless working a 10-hour work day, then time and one-half (1½) is paid for work performed over ten (10) hours a day) or over forty (40) hours per work week. Work performed on Sundays and recognized holidays shall be paid at the double (2) time rate of pay. **SHIFT WORK:** When it is necessary for the project to operate in shifts, there will be three (3) eight (8) hour shifts commencing at 8:00 a.m. Shift work must continue for a period of not less than three (3) consecutive work days, two (2) days which must be regular work days (Monday through Friday). In the event the second or third shift of any regular work day shall fall into a Saturday or a holiday, such extension into a Saturday or holiday shall be considered as part of the previous workday and employees shall be paid at the regular shift rate. The first day shift shall work a regular eight (8) hour day at regular rates. The second shift shall be eight (8) hours regular time pay plus \$2.00 per hour premium for seven and one-half (7½) hours work. Third shift will be for eight (8) hours regular time pay plus \$2.50 per hour premium for seven (7) hour work.

**NO. 94:** Means eight (8) hours shall constitute a day's work between the hours of 8:00 a.m. and 5:00 p.m. The regular workday starting time of 8:00 a.m. (and resulting quitting time of 4:30 p.m.) may be moved forward to 6:00 a.m. or delayed one (1) hour to 9:00 a.m. All work performed in excess of the regular work day and on Saturday shall be compensated at one and one-half (1½) times the regular pay. In the event time is lost during the work week due to weather conditions, the Employer may schedule work on the following Saturday at straight time. All work accomplished on Sunday and holidays shall be compensated at double the regular rate of wages.

**NO. 124:** Means eight (8) hours shall constitute a day's work on all classes of work between the hours of 6:00 a.m. and 5:30 p.m., Monday through Friday. The pay for time worked during these hours shall be at the regular wage rate. The regular workweek shall be Monday through Friday. Employment from 4:30 p.m. to 12:00 midnight, Monday through Friday, shall be paid for at one and one-half (1½) times the regular hourly rate. From 12:00 midnight until 8:00 a.m. on any day shall be paid for at twice the regular hourly rate. All time worked on Sundays and the recognized holidays shall be paid at the rate of double (2) time. It is understood that forty (40) hours shall constitute a regular workweek, (5-8's) Sunday Midnight through Friday Midnight, understanding anything over eight (8) hours is one and one-half (1½) times the hourly wage rate.

**COOPER COUNTY  
HOLIDAY SCHEDULE – BUILDING CONSTRUCTION**

**NO. 3:** All work done on New Year's Day, Memorial Day, Independence Day, Labor Day, Veteran's Day (November 11), Thanksgiving Day, and Christmas Day shall be compensated at the double (2) time rate of pay. When any of these holidays fall on a Sunday, the following Monday shall be observed. No work shall be performed on the days set forth except in cases of emergencies to protect life or property.

**NO. 4:** All work done on New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving and Christmas Day shall be paid at the double time rate of pay. If any of the above holidays fall on Sunday, Monday will be observed as the recognized holiday. If any of the above holidays fall on Saturday, Friday will be observed as the recognized holiday.

**NO. 5:** All work that shall be done on New Year's Day, Memorial Day, Fourth of July, Labor Day, Veteran's Day, Thanksgiving Day, and Christmas Day shall be paid at the double (2) time rate of pay.

**NO. 7:** The following days are assigned days and are recognized as holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Veteran's Day, Thanksgiving Day, and Christmas Day. If a holiday falls on a Sunday, it shall be observed on the following Monday. If a holiday falls on a Saturday, it shall be observed on the preceding Friday. No work shall be performed on Labor Day except in case of jeopardy to work under construction. This is applied to protect Labor Day. When a holiday falls during the normal workweek, Monday through Friday, it shall be counted as eight (8) hours toward the forty (40) hour week. However, no reimbursement for this eight (8) hours is too paid to the workman unless worked. If workman are required to work the above enumerated holidays or days observed as such, or on Sunday, they shall receive double (2) the regular rate of pay for such work.

**NO. 15:** All work accomplished on the recognized holidays of New Year's Day, Decoration Day (Memorial Day), Independence Day (Fourth of July), Labor Day, Veteran's Day, Thanksgiving Day and Christmas Day, or days observed as these named holidays, shall be compensated for at double (2) the regular hourly rate of wages plus fringe benefits. If a holiday falls on Saturday, it shall be observed on the preceding Friday. If a holiday falls on a Sunday, it shall be observed on the following Monday. No work shall be performed on Labor Day, Christmas Day, Decoration Day or Independence Day except to preserve life or property.

**NO. 19:** All work done on New Year's Day, Memorial Day, July 4th, Labor Day, Thanksgiving Day, and Christmas Day shall be paid at the double time rate of pay. The employee may take off Friday following Thanksgiving Day. However, the employee shall notify his or her Foreman, General Foreman or Superintendent on the Wednesday preceding Thanksgiving Day. When one of the above holidays falls on Sunday, the following Monday shall be considered a holiday and all work performed on either day shall be at the double (2) time rate. When one of the holidays falls on Saturday, the preceding Friday shall be considered a holiday and all work performed on either day shall be at the double (2) time rate.

**NO. 23:** All work done on New Year's Day, Memorial Day, Independence Day, Labor Day, Veteran's Day, Thanksgiving Day, Christmas Day and Sundays shall be recognized holidays and shall be paid at the double time rate of pay. When a holiday falls on Sunday, the following Monday shall be considered a holiday.

**NO. 32:** All work performed for the Friday and Saturday following Thanksgiving shall be paid at the time and one-half (1½) rate of pay. All work performed on Sundays, New Year's Day, Memorial Day, Fourth of July, Labor Day, Thanksgiving Day and Christmas Day shall be paid at the double (2) time rate of pay. When one of the above holidays falls on Sunday, the following Monday shall be observed and when one of the above holidays falls on Saturday, the preceding Friday shall be observed.

**NO. 35:** The following days are recognized as holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day and Christmas Day. If a holiday falls on a Sunday, it shall be observed on the following Monday. No work shall be performed on Labor Day except in case of jeopardy to work under construction. This rule is applied to protect Labor Day. When a holiday falls during the normal work week, Monday through Friday, it shall be counted as eight (8) hours toward the forty (40) hour week; however, no reimbursement for this eight (8) hours is to be paid the workman unless worked. An Employer working a four (4) day, ten (10) hour schedule may use Friday as a make-up day when an observed holiday occurs during the work week. Employees have the option to work that make-up day. If workmen are required to work the above enumerated holidays or days observed as such, they shall receive time and one-half (1 ½) the regular rate of pay for such work.

**COOPER COUNTY  
HOLIDAY SCHEDULE – BUILDING CONSTRUCTION**

**NO. 44:** All work done on New Year's Day, Memorial Day, Independence Day, Veteran's Day, Thanksgiving Day, and Christmas Day shall be paid at the double time rate of pay. If a holiday falls on a Sunday, it shall be observed on the Monday following. If a holiday falls on a Saturday, it shall be observed on the preceding Friday. No work shall be performed on these days except in emergency to protect life or property. All work performed on these holidays shall be compensated at double the regular hourly rate for the work performed. Overtime shall be computed at half-hour intervals.

**NO. 53:** All work done on New Year's Day, Memorial Day, Independence Day, Thanksgiving Day, Christmas Day or days observed as such for these holidays shall be paid at the double (2) time rate of pay. No work shall be performed on Labor Day except in special cases of emergency, and then the rate of pay shall be at three (3) times the regular rate of pay. When a holiday falls on a Sunday, the following Monday shall be observed as the holiday. When a holiday falls on Saturday, the preceding Friday shall be observed as the holiday.

**NO. 54:** All work performed on New Year's Day, Memorial Day, Independence Day, Labor Day, Veteran's Day, Thanksgiving Day, the Friday after Thanksgiving Day, and Christmas Day shall be paid at the double (2) time rate of pay. When a holiday falls on Saturday, it shall be observed on Friday. When a holiday falls on Sunday, it shall be observed on Monday.

**NO. 69:** All work performed on New Year's Day, Decoration Day, July Fourth, Labor Day, Veteran's Day, Thanksgiving Day or Christmas Day shall be compensated at double (2) their straight-time hourly rate of pay. Friday after Thanksgiving and the day before Christmas will also be holidays, but if the employer chooses to work these days, the employee will be paid at straight-time rate of pay. If a holiday falls on a Sunday in a particular year, the holiday will be observed on the following Monday.

**NO. 72:** All work performed on New Year's Day, Memorial Day (last Monday in May), Independence Day, Labor Day, Thanksgiving Day and Christmas Day shall be paid for at double (2) the regular straight time rate of pay. Any one of the above listed holidays falling on Sunday shall be observed on the following Monday and paid for at double (2) the regular straight time rate of pay, if worked. Any one of the above listed holidays falling on Saturday shall be observed on the prior Friday and paid for at double (2) the regular straight time rate of pay, if worked. No work shall be performed on Labor Day except in case of emergency.

**NO. 74:** All work performed on New Year's Day, Memorial Day, Fourth of July, Labor Day, Veteran's Day, Thanksgiving Day and Christmas Day, shall be paid at double (2) time of the hourly rate of pay. In the event one of the above holiday's falls on Saturday, the holiday shall be celebrated on Saturday. If the holiday falls on Sunday, the holiday will be celebrated on Monday.

Heavy Construction Rates for  
COOPER County

Section 027

OCCUPATIONAL TITLE	* Date of Increase	Basic Hourly Rates	Over-Time Schedule	Holiday Schedule	Total Fringe Benefits
<b>CARPENTER</b>					
Journeyman		\$28.87	7	16	\$11.85
Millwright		\$28.87	7	16	\$11.85
Pile Driver Worker		\$28.87	7	16	\$11.85
<b>OPERATING ENGINEER</b>					
Group I		\$29.45	5	15	\$13.00
Group II		\$29.05	5	15	\$13.00
Group III		\$29.05	5	15	\$13.00
Group IV		\$27.05	5	15	\$13.00
Oiler-Driver		\$27.05	5	15	\$13.00
<b>LABORER</b>					
General Laborer		\$25.06	2	4	\$9.92
Skilled Laborer		\$25.66	2	4	\$9.92
<b>TRUCK DRIVER-TEAMSTER</b>					
Group I		\$26.27	12	3	\$9.85
Group II		\$26.43	12	3	\$9.85
Group III		\$26.42	12	3	\$9.85
Group IV		\$26.54	12	3	\$9.85

Use Heavy Construction Rates on Highway and Heavy construction in accordance with the classifications of construction work established in 8 CSR 30-3.040(3).

Use Building Construction Rates on Building construction in accordance with the classifications of construction work established in 8 CSR 30-3.040(2).

If a worker is performing work on a heavy construction project within an occupational title that is not listed on the Heavy Construction Rate Sheet, use the rate for that occupational title as shown on the Building Construction Rate sheet.

**COOPER COUNTY  
OVERTIME SCHEDULE – HEAVY CONSTRUCTION**

**FED:** Minimum requirement per Fair Labor Standards Act means time and one-half (1 ½) shall be paid for all work in excess of forty (40) hours per work week.

**NO. 2:** Means a regular workweek shall be forty (40) hours and will start on Monday and end on Friday. The Employer shall have the option of working five 8-hour days or four 10-hour days Monday through Friday. If an Employer elects to work five 8-hour days during any workweek, hours worked more than eight (8) per day or 40 per week shall be paid at time and one-half the hourly rate Monday through Friday. If an Employer elects to work four 10-hour days in a week, work performed more than ten (10) hours per day or 40 hours per week shall be paid at time and one-half the hourly rate Monday through Friday. When working a five 8-hour day schedule and an Employer is prevented from working forty (40) hours Monday through Friday, or any part thereof, by reason of inclement weather, Saturday or any part thereof may be worked as a make-up day at the straight time rate. If an Employer is working a four 10-hour day schedule and loses a day due to inclement weather, he may work 10 hours Friday at straight time. All hours worked over the 40 hours Monday through Friday will be paid at 1 ½ overtime rate. A workday shift is to begin at the option of the Employer, between 6:00 a.m. and not later than 9:00 a.m. However, the project starting time may be advanced or delayed if required. If workmen are required to work the enumerated holidays or days observed as such or Sundays, they shall receive double (2) the regular rate of pay for such work. Overtime shall be computed at one-half (1/2) hour intervals. Shift: The Contractor may elect to work one, two or three shifts on any work. When operating on more than one shift, the shifts shall be known as the day shift, swing shift, and graveyard shift as such terms are recognized in the industry. When two shifts are worked on any operation, the shifts will consist of eight (8) or ten (10) hours exclusive of lunchtime. When three shifts are worked the first day or day shift will consist of eight (8) hours exclusive of lunchtime. The second or swing shift shall consist of seven and one-half (7 1/2) hours work for eight hours pay, exclusive of lunchtime, and the third or the graveyard shift shall consist of seven (7) hours work for eight (8) hours pay, exclusive of the lunchtime. All time in excess of normal shifts shall be considered overtime. Multiple shift (the two or three shift) operation will not be construed on the entire project if at anytime it is deemed advisable and necessary for the Employer to multiple shift a specific operation. However, no shift shall be started between midnight and six a.m. except the graveyard shift on a three-shift operation, or except in an unusual or emergency situation. If an Employer starts a shift between midnight and 6 a.m. except the graveyard shift on a three-shift operation, he shall reimburse all employees for the entire shift at the double time rate. Completion of the second shift on a two-shift operation or completion of the graveyard shift on a three-shift operation that carries over into Saturday morning, shall be at the straight time rate. Overtime shall be computed at ½ hour intervals.

**NO. 5:** Means a regular work week shall consist of not more that forty (40) hours work, Monday through Saturday, and all work performed over and above ten (10) hours per day and forty (40) hours per week shall be paid at the rate of time & one-half (1½). Workmen shall receive time and one-half (1½) for all work performed on Sundays and recognized holidays or days observed as such. Double (2) time shall be paid for work on Sunday or recognized holidays when and only if any other craft employees of the same employer at work on that same job site are receiving double (2) time pay for that Sunday or holiday. If a job can't work forty (40) hours, Monday through Saturday, because of inclement weather or other conditions beyond the control of the Employer, Friday and Saturday may be worked as make up days at straight time (if working 4-10's). Saturday may be worked as a make up day at straight time (if working 5-8's). Make up days shall not be utilized for days lost to holidays. A work day is to begin between 6:00 a.m. and 9:00 a.m. at the option of the Employer except when inclement weather or other conditions beyond the reasonable control of the Employer, including requirements of the owner, prevent work. In such event the starting time may be delayed but not later than 12:00 noon. Where one of the holidays falls or is observed during the work week, then all work performed over and above thirty-two (32) hours shall be paid at time & one-half (1½).

**COOPER COUNTY  
OVERTIME SCHEDULE – HEAVY CONSTRUCTION**

**NO. 7:** Means the regular work week shall start on Monday and end on Friday, except where the Employer elects to work Monday through Thursday, ten (10) hours per day. All work over ten (10) hours in a day or forty (40) hours in a week shall be at the overtime rate of one and one-half (1½) times the regular hourly rate. The regular work day shall be either eight (8) or ten (10) hours. If a job can't work forty (40) hours Monday through Friday because of inclement weather or other conditions beyond the control of the Employer, Friday or Saturday may be worked as a make-up day at straight time (if working 4-10's). Saturday may be worked as a make-up day at straight time (if working 5-8's). Make-up days shall not be utilized for days lost due to holidays. A workday is to begin at the option of the Employer but not later than 11:00 a.m. except when inclement weather, requirements of the owner or other conditions beyond the reasonable control of the Employer prevent work. Except as worked as a make-up day, time on Saturday shall be worked at one and one-half (1½) times the regular rate. Work performed on Sunday shall be paid at two (2) times the regular rate. Work performed on recognized holidays or days observed as such, shall also be paid at the double (2) time rate of pay.

**NO. 12:** Means a regular work week shall consist of not more than forty (40) hours of work and all work performed over and above ten (10) hours per day and forty (40) hours per week shall be paid at the rate of time & one-half (1½). A workday is to begin between 6:00 a.m. and 9:00 a.m. at the option of the Employer except when inclement weather or other conditions beyond the reasonable control of the Employer, in which event, the starting time may be advanced or delayed. Workers shall receive time and one-half (1½) for all work performed on recognized holidays or days observed as such.

**COOPER COUNTY  
HOLIDAY SCHEDULE – HEAVY CONSTRUCTION**

**NO. 3:** The following days are recognized as holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day and Christmas Day. If a holiday falls on a Sunday, it shall be observed on the following Monday. No work shall be performed on Labor Day except in case of jeopardy to work under construction. This rule is applied to protect Labor Day. When a holiday falls during the normal work week, Monday through Friday, it shall be counted as eight (8) hours toward the forty (40) hour week; however, no reimbursement for this eight (8) hours is to be paid to the workmen unless worked. An Employer working a four (4) day, ten (10) hour schedule may use Friday as a make up day when an observed holiday occurs during the work week. Employees have the option to work that make up day. If workmen are required to work the above enumerated holidays, or days observed as such, they shall receive time & one-half (1½) the regular rate of pay for such work.

**NO. 4:** All work performed on New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, Christmas Day, or observed as such, shall be paid at the double time rate of pay. When a Holiday falls on a Sunday, Monday shall be observed. No work shall be performed on Labor Day, except in case of jeopardy to life or property. This is applied to protect Labor Day.

**NO. 15:** The following days are recognized as holidays: New Year's Day, Memorial Day, July Fourth, Labor Day, Thanksgiving Day and Christmas Day. If a holiday falls on Sunday, it shall be observed on the following Monday. If a holiday falls on Saturday, it shall be observed on the preceding Friday. No work shall be performed on Labor Day except in case of jeopardy to work under construction. This rule is applied to protect Labor Day. If workmen are required to work the above enumerated holidays or days observed as such, they shall receive time and one-half (1½) the regular rate of pay for such work. Where one of the holidays specified falls or is observed during the workweek, then all work performed over and above thirty-two (32) hours in that week shall be paid at the rate of time and one-half (1½). Workmen shall receive time and one-half (1 ½) for all work performed on Sundays. Double (2) time shall be paid for work on Sunday or recognized holidays when and only if any other craft employees of the same employer at work on that same job site are receiving double (2) time for that Sunday or holiday.

**NO. 16:** The following days are recognized as holidays: New Year's Day, Memorial Day, Fourth of July, Labor Day, Thanksgiving Day and Christmas Day. If a holiday falls on Sunday, it shall be observed on the following Monday. If a holiday falls on Saturday, it shall be observed on the preceding Friday. No work shall be performed on Labor Day except in case of jeopardy to work under construction. This rule is applied to protect Labor Day. When a holiday falls during the normal work week, Monday through Friday, it shall be counted as eight (8) hours toward the forty (40) hour week; however, no reimbursement for this eight (8) hours is to be paid to the worker unless worked. If workers are required to work the above recognized holidays or days observed as such, they shall receive double (2) the regular rate of pay for such work.

## OUTSIDE ELECTRICIAN

These rates are to be used for the following counties:

Adair, Audrain, Boone, Callaway, Camden, Carter, Chariton, Clark, Cole, Cooper, Crawford, Dent, Franklin, Gasconade, Howard, Howell, Iron, Jefferson, Knox, Lewis, Lincoln, Linn, Macon, Maries, Marion, Miller, Moniteau, Monroe, Montgomery, Morgan, Oregon, Osage, Perry, Phelps, Pike, Pulaski, Putnam, Ralls, Randolph, Reynolds, Ripley, St. Charles, St. Francois, St. Louis City, St. Louis County, Ste. Genevieve, Schuyler, Scotland, Shannon, Shelby, Sullivan, Texas, Warren, and Washington.

### COMMERCIAL WORK

Occupational Title	Basic	Total
	Hourly	Fringe
	Rate	Benefits
Journeyman Lineman	\$35.03	\$4.75 + 42%
Lineman Operator	\$30.24	\$4.75 + 42%
Groundman	\$23.38	\$4.75 + 42%

**OVERTIME RATE:** Eight (8) hours shall constitute a work day between the hours of 7:00 a.m. and 4:30 p.m. Forty (40) hours within five (5) days, Monday through Friday inclusive, shall constitute the work week. Work performed in the 9th and 10th hour, Monday through Friday, shall be paid at time and one-half (1½) the regular straight time rate of pay. Contractor has the option to pay two (2) hours per day at the time and one-half (1½) the regular straight time rate of pay between the hours of 6:00 a.m. and 5:30 p.m., Monday through Friday. Work performed outside the regularly scheduled working hours and on Saturdays, Sundays and recognized legal holidays, or days celebrated as such, shall be paid for at the rate of double (2) time.

**HOLIDAY RATE:** All work performed on New Year's Day, Memorial Day, Fourth of July, Labor Day, Veteran's Day, Thanksgiving Day, Christmas Day, or days celebrated as such, shall be paid at the double time rate of pay. When one of the foregoing holidays falls on Sunday, it shall be celebrated on the following Monday. When one of the foregoing holidays falls on Saturday, it shall be celebrated on the Friday before the holiday.

### UTILITY WORK

Occupational Title	Basic	Total
	Hourly	Fringe
	Rate	Benefits
Journeyman Lineman	\$35.03	\$4.75 + 39.55%
Lineman Operator	\$30.24	\$4.75 + 39.55%
Groundman	\$23.38	\$4.75 + 39.55%

**OVERTIME RATE:** Eight (8) hours shall constitute a work day between the hours of 7:00 a.m. and 4:30 p.m. Forty (40) hours within five (5) days, Monday through Friday inclusive, shall constitute the work week. Work performed in the 9th and 10th hour, Monday through Friday, shall be paid at time and one-half (1½) the regular straight time rate of pay. Contractor has the option to pay two (2) hours per day at the time and one-half (1½) the regular straight time rate of pay between the hours of 6:00 a.m. and 5:30 p.m., Monday through Friday. Work performed in the first eight (8) hours on Saturday shall be paid at the rate of one and eight tenths (1.8) the regular straight time rate. Work performed outside these hours and on Sundays and recognized legal holidays, or days celebrated as such, shall be paid for at the rate of double (2) time.

**HOLIDAY RATE:** All work performed on New Year's Day, Memorial Day, Fourth of July, Labor Day, Veteran's Day, Thanksgiving Day, Christmas Day, or days celebrated as such, shall be paid at the double time rate of pay. When one of the foregoing holidays falls on Sunday, it shall be celebrated on the following Monday. When one of the foregoing holidays falls on Saturday, it shall be celebrated on the Friday before the holiday.