


CHAPTER VI
PAVEMENT STRUCTURE DESIGN

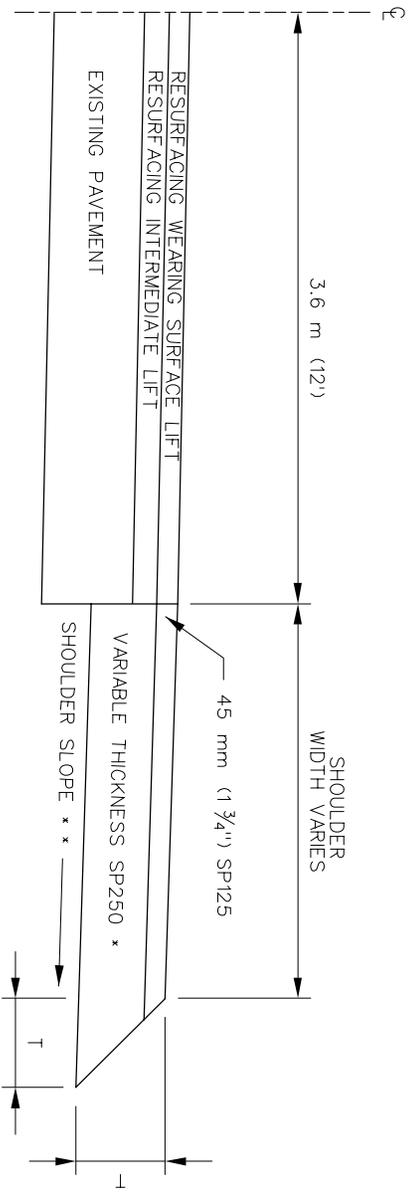

PAVEMENT WITH ADT >3500

- * RECOMMENDED THICKNESS IS 100 mm (4"), BUT MAY VARY IN LOCALIZED AREAS DEPENDING UPON TRAFFIC CONDITIONS. UNDER NO CIRCUMSTANCES SHOULD SHOULDER THICKNESS BE GREATER THAN THE ROADWAY PAVEMENT OR LESS THAN 145 mm (5 3/4").
- ** MATCH EXISTING SHOULDER SLOPE. MINIMUM SHOULDER SLOPE SHOULD BE 2%.

Shoulder Stabilization (Resurfacing Projects)