


Contract Limits and Location Sketch

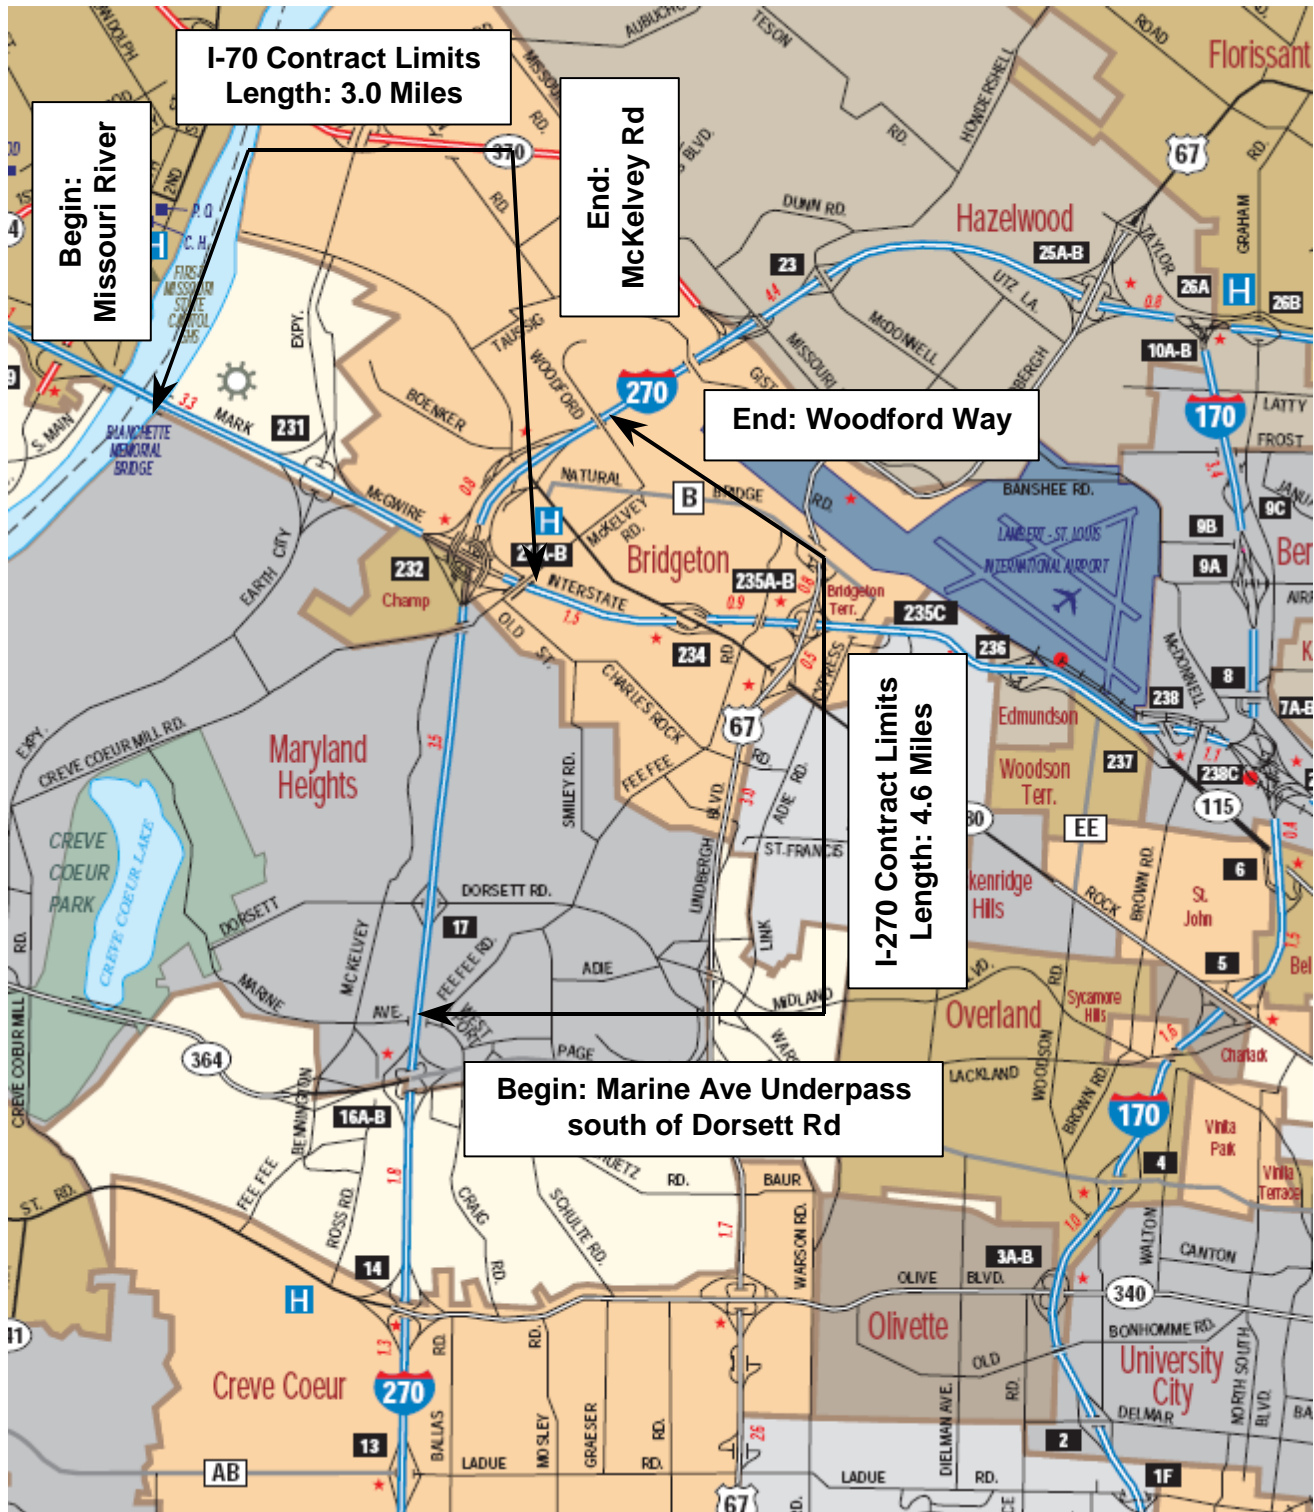

Contract Term and Extension

Initial Contract Term: Commencing [April 1, 2011](#) and shall terminate [November 30, 2011](#)
First Extended Term: Commencing [April 1, 2012](#) and shall terminate [November 30, 2012](#)
Second Extended Term: Commencing [April 1, 2013](#) and shall terminate [November 30, 2013](#)

Contract Limits and Exclusions

The following areas shall be included in the contract limits:

I-70

Begin Point: Missouri River
End Point: McKelvey Road overpass (east of I-270)

Earth City Expressway / I-70 Interchange

Begin Point: State Maintenance Begins / Ends signs north of I-70
End Point: State Maintenance Ends / Begins signs south of I-70

I-70 South Outer Road (Interstate Drive)

Begin Point: McKelvey Road
End Point: End of Roadway east of Earth City Expressway

I-270

Begin Point: Marine Avenue underpass (south of Dorsett Road interchange)
End Point: Woodford Way overpass (north of Route 180 interchange)

MO 180 / I-270 Interchange

Begin Point: Pennridge Lane (west of I-270)
End Point: Route B (Natural Bridge Road - east of I-270)

Notes:

1) Includes all areas between and adjacent to ramps at interchanges.

I-270 Location Specific Details:

15ft.cut on all of main line 3 times per year one before Memorial Day, one before July 4th, and one before Labor Day. One 30ft cut done before Nov. 15th. Trim around all guardrail, guard cable, and signs every cycle. More details about the ramps below.

Exit 17 Dorsett on ramp to 270 north and 270 south off ramp to Dorsett 15 ft cut on left side of ramp, cut to fence on the right side up the ramp taper back to 15 ft when it runs back into the

main line for 15ft cut. For 30ft cut entire area on inside of ramp to the interstate, right side cut to fence taper to 30ft when runs back into mainline.

Exit 20A ramp 270 to 70 east 15ft on both sides of ramp for 15ft cycles. 30ft cut down both sides for 30 ft. mow except where elevated

Exit 20B ramp 270 to 70 west 15ft on both sides of ramp except where elevated for 15ft cycle, 30ft on both sides except where elevated for 30ft cycle

Exit 20C St. Charles Rock Rd. 15ft on both sides of ramp for 15ft cycle, 30ft down right side and mow entire area between the left side of ramp and interstate

I-70 Location Specific Details:

Mow entire area in median at the east side of the Missouri River Bridge every cycle

Exit 231 A and B Maryland Heights Expressway 15ft on both sides of all on and off ramps for 15ft cycles, 30 ft on right side of outer most ramps and entire area between left side of ramps and the interstate including the clover leafs

Exit 232 A and B ramps 70 to 270 15 ft on both sides of ramps except where elevated for 15ft cycles, 30 ft on both side of ramps except where elevated

Exclusions: The following are known areas that shall be excluded from the contract limits unless otherwise directed by the engineer:

<u>ROUTE</u>	<u>DIRECTION</u>	<u>CROSS STREET</u>	<u>DESCRIPTION</u>	<u>ACREAGE</u>
I-70/I-270				
I-70	WB	Various Areas Earth City Expressway	Wildflower areas West of I-270 gore point to the north half of Earth City Expressway, mile marker 232.6 to 231.6. Includes frontages of Caps, Courtyard, World Omni Financial & Home Savings of America	0.50 6.00
I-70	WB	Mo. River	From the "First State Capitol Historic Site" sign to the levee mile marker 230.8 to 230.6. Includes frontages of Dart & Best Buy	3.00

TOTAL EXCLUSIONS (APPROXIMATE):

9.5 ACRES

Mowing Cycles, Litter Removal Cycles, and Preliminary Schedule**April 1 through June 30: 2 mowing cycles****July 1 through November 30: 2 mowing cycles****TOTAL MOWING & LITTER REMOVAL CYCLES: 4****Mowing Quantities**

The quantities shown are the total estimated acres to be mowed during one contract term if all areas are mowed and all mowing cycles are authorized. The total area included in the contract limits has been reduced for excluded areas and/or areas mowed and maintained by others.

The quantities are calculated as follows:

TOTAL AREA PER 15' MOWING CYCLE (APPROXIMATE): 85 ACRES
TOTAL AREA PER 30' MOWING CYCLE (APPROXIMATE): 135 ACRES

Total Area in Contract Limits (Acres)	X	Number of Mowing Cycles During Contract Term	=	Total Mowing Quantity During Contract Term (Acres)
85	X	3	=	255
135	X	1	=	135

TOTAL CONTRACT QUANTITY – MOWING: 390 ACRES

Litter Removal Quantities

In accordance with the contract specifications the litter removal area is presumed to be equal to the mowing area.

Total Area in Contract Limits (Acres)	X	Number of Litter Removal Cycles During Contract Term	=	Total Litter Removal Quantity During Contract Term (Acres)
85	X	3	=	255
135	X	1	=	135

TOTAL CONTRACT QUANTITY – LITTER REMOVAL: 390 ACRES

Contract Time for Completion of Work

The contractor shall complete all work required through the entire contract limits within the working days specified below after the notice to proceed date.

Mowing Cycle with Litter Removal Cycle:


85 Acre Cycle: 6 Working Days

135 Acre Cycle: 9 Working Days

Mowing Height & Special Equipment

- 1) Mowing equipment shall have a minimum adjustable height of 3 to 8 inches.
- 2) No special equipment or equipment restrictions are required for this contract.
- 3) All grass and vegetation shall be cut and trimmed to a height of five (5) inches unless otherwise directed by the engineer.

Special Sign Detail

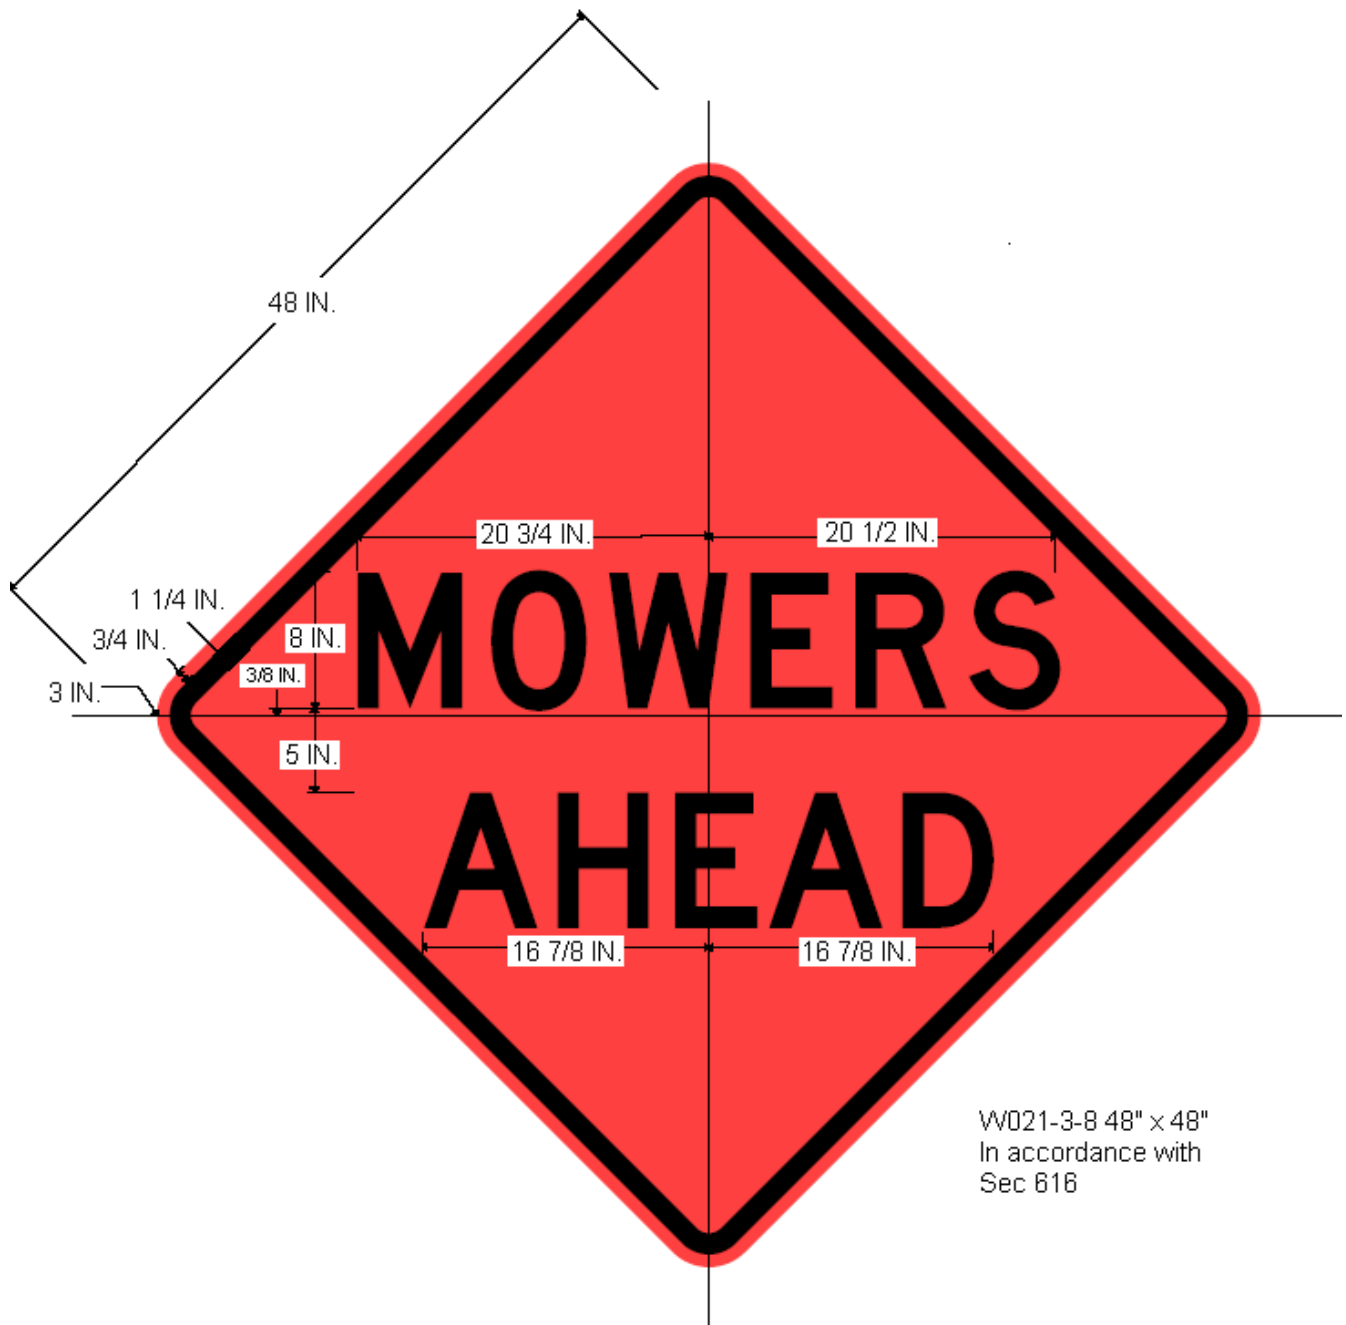

W021-3-8 48" x 48"
In accordance with
Sec 616

COLOR

Legend & Border – Black
Background – Orange

SHEETING

MoDOT Florescent Orange