


Contract Limits and Location Sketch

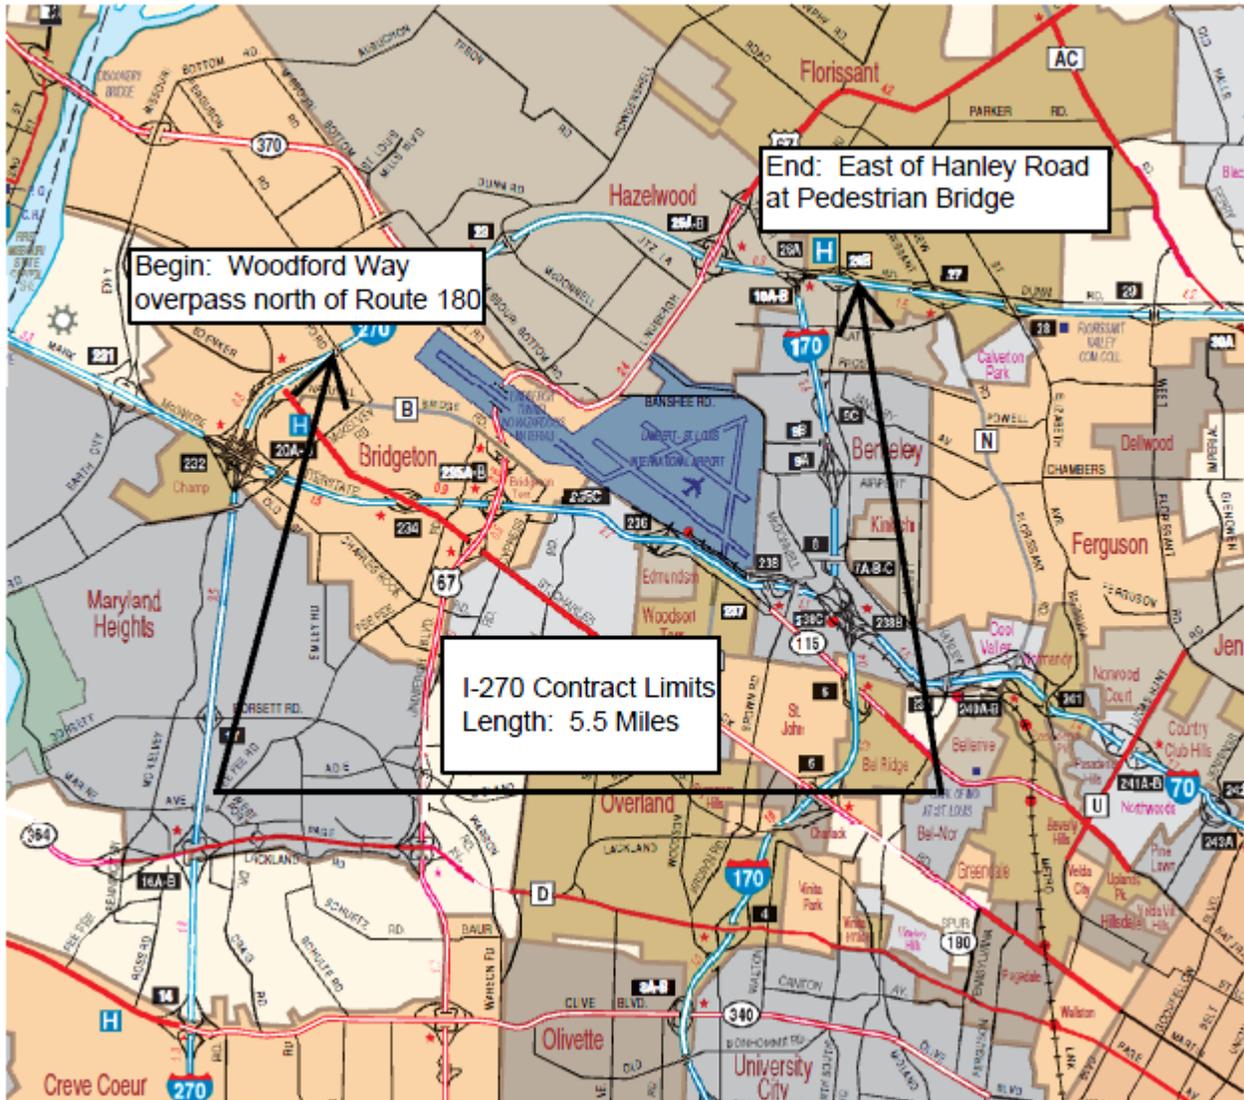

Contract Term and Extension

Initial Contract Term: Commencing [April 1, 2011](#) and shall terminate [November 30, 2011](#)
First Extended Term: Commencing [April 1, 2012](#) and shall terminate [November 30, 2012](#)
Second Extended Term: Commencing [April 1, 2013](#) and shall terminate [November 30, 2013](#)

Contract Limits and Exclusions

The following areas shall be included in the contract limits:

I-270

Begin Point: [Woodford Way overpass \(north of Route 180 interchange\)](#)
(approximate mile marker 21.5)

End Point: [Pedestrian Bridge located east of Hanley Road \(east of I-170 Interchange\)](#)
(approximate mile marker 27.0)

MO 370 Interchange

Begin Point: [Norfolk Southern Railroad Bridge \(1/2 mile west of I-270\)](#)

End Point: [I-270](#)

US 67 Interchange

Begin Point: [Taylor Road bridge \(north of I-270\)](#)

End Point: [Utz Lane \(south of I-270\)](#)

I-170 Interchange

Begin Point: [I-270](#)

End Point: [Nyflot Road underpass \(1/2 mile south of I-270\)](#)

I-270 North Outer Road (Dunn Rd)

Begin Point: [Utz Lane](#)

End Point: [Taylor Road](#)

Note: 1) Includes both sides of outer road

Notes:

1) Includes all areas between and adjacent to ramps at interchanges.

Location Specific Details:

[15ft.cut on all of main line 3 times per year one before Memorial Day, one before July 4th, and one before Labor Day. One 30ft cut done before Nov. 15th. Trim around all guardrail, guard cable, and signs every cycle. More details about the ramps below.](#)

[Exit 22A 270 to 370 west 15 ft cut both sides for 15ft cycles, 30ft cut both sides for 30ft cycle](#)

[Exit 22B 270 to Mo. Bottom Rd. 15ft cut both sides for 15ft cycles, 30ft cut both sides for 30ft cycle except where elevated](#)

Exit 23 McDonnell Blvd. 15ft both sides for 15ft cycles, 30ft on right side and entire area between left side and interstate for 30ft cycle

Exit 25 Lindberg 15ft on both sides of on and off ramps for 15ft cycles, 30ft on the right side of outer most ramps cut entire area on the left side of outer most ramps and interstate including clover leaves for 30 ft cycle

Section of interstate between Lindberg and 170 mow to the fence every cycle

Exit 26A 270 to 170 south 15ft both sides except where elevated for 15ft cycles, 30ft both sides except where elevated for 30ft cycle

Exit 26B 270 east to Hanley 15ft both sides of off and on ramps for 15ft cycles, 30ft on right side of off and on ramps and entire area between left side of off and on ramp and interstate for 30ft cycle except where elevated

Exclusions: The following are known areas that shall be excluded from the contract limits unless otherwise directed by the engineer:

<u>ROUTE</u>	<u>DIRECTION</u>	<u>CROSS STREET</u>	<u>DESCRIPTION</u>	<u>ACREAGE</u>
I-270	SB	Gist	Hillside behind guardrail between Gist Rd. and Woodford Way	1.50
I-270	SB	McDonnell Blvd.	From McDonnell Blvd. sign to exit ramp. Degel Truck Center @ mile marker 23.8	3.00
I-270	SB	McDonnell Blvd.	Area west of on-ramp in SW quadrant of interchange in front of Behlman Auto Dealership	3.00
I-270 NOR (Dunn Rd)	WB	Various	Various areas maintained by others	5.00

TOTAL EXCLUSIONS (APPROXIMATE):

12.5 ACRES

Mowing Cycles, Litter Removal Cycles, and Preliminary Schedule

April 1 through June 30: 2 mowing cycles

July 1 through November 30: 2 mowing cycles

TOTAL MOWING & LITTER REMOVAL CYCLES: 4

Mowing Quantities

The quantities shown are the total estimated acres to be mowed during one contract term if all areas are mowed and all mowing cycles are authorized. The total area included in the contract limits has been reduced for excluded areas and/or areas mowed and maintained by others.

The quantities are calculated as follows:

TOTAL AREA PER 15' MOWING CYCLE (APPROXIMATE): 45 ACRES
TOTAL AREA PER 30' MOWING CYCLE (APPROXIMATE): 75 ACRES

Total Area in Contract Limits (Acres)	X	Number of Mowing Cycles During Contract Term	=	Total Mowing Quantity During Contract Term (Acres)
45	X	3	=	135
75	X	1	=	75

TOTAL CONTRACT QUANTITY – MOWING: 210 ACRES

Litter Removal Quantities

In accordance with the contract specifications the litter removal area is presumed to be equal to the mowing area.

Total Area in Contract Limits (Acres)	X	Number of Litter Removal Cycles During Contract Term	=	Total Litter Removal Quantity During Contract Term (Acres)
45	X	3	=	135
75	X	1	=	75

TOTAL CONTRACT QUANTITY – LITTER REMOVAL: 210 ACRES

Contract Time for Completion of Work


The contractor shall complete all work required through the entire contract limits within the working days specified below after the notice to proceed date.

Mowing Cycle with Litter Removal Cycle:
45 Acre Cycle: 3 Working Days
75 Acre Cycle: 5 Working Days

Mowing Height & Special Equipment

- 1) Mowing equipment shall have a minimum adjustable height of 3 to 8 inches.
- 2) No special equipment or equipment restrictions are required for this contract.
- 3) All grass and vegetation shall be cut and trimmed to a height of five (5) inches unless otherwise directed by the engineer.

Special Sign Detail

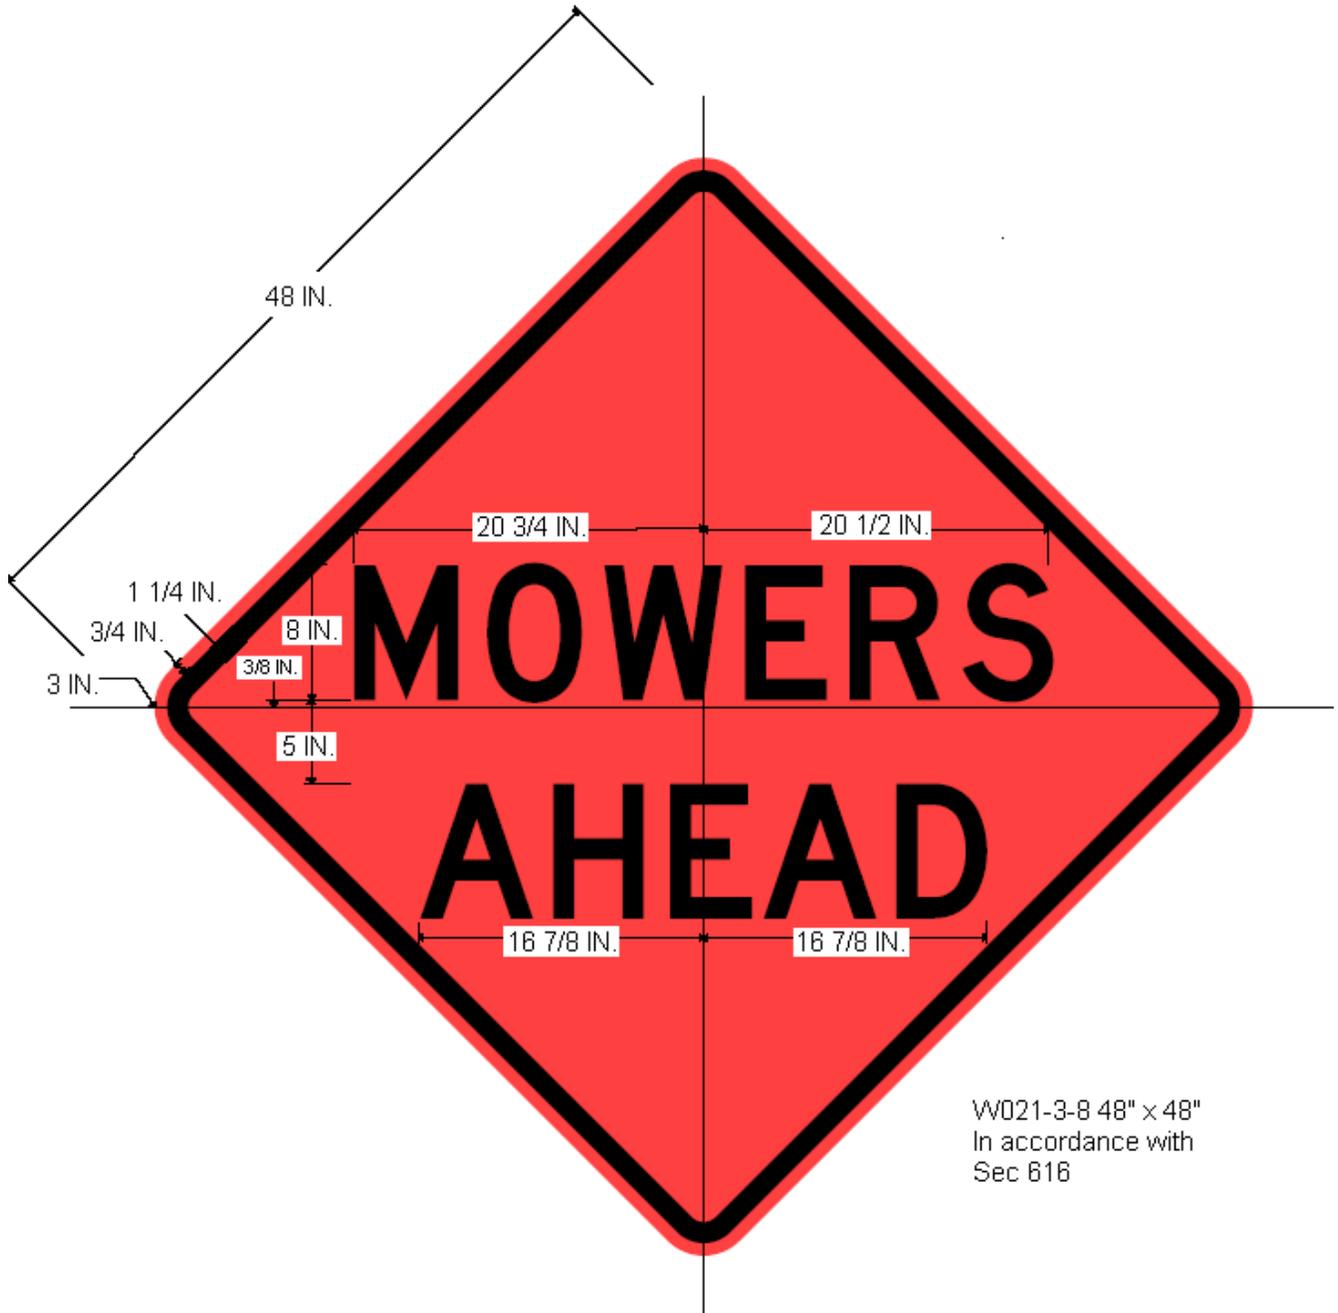

W021-3-8 48" x 48"
In accordance with
Sec 816

COLOR

Legend & Border – Black
Background – Orange

SHEETING

MoDOT Florescent Orange