


Contract Limits and Location Sketch

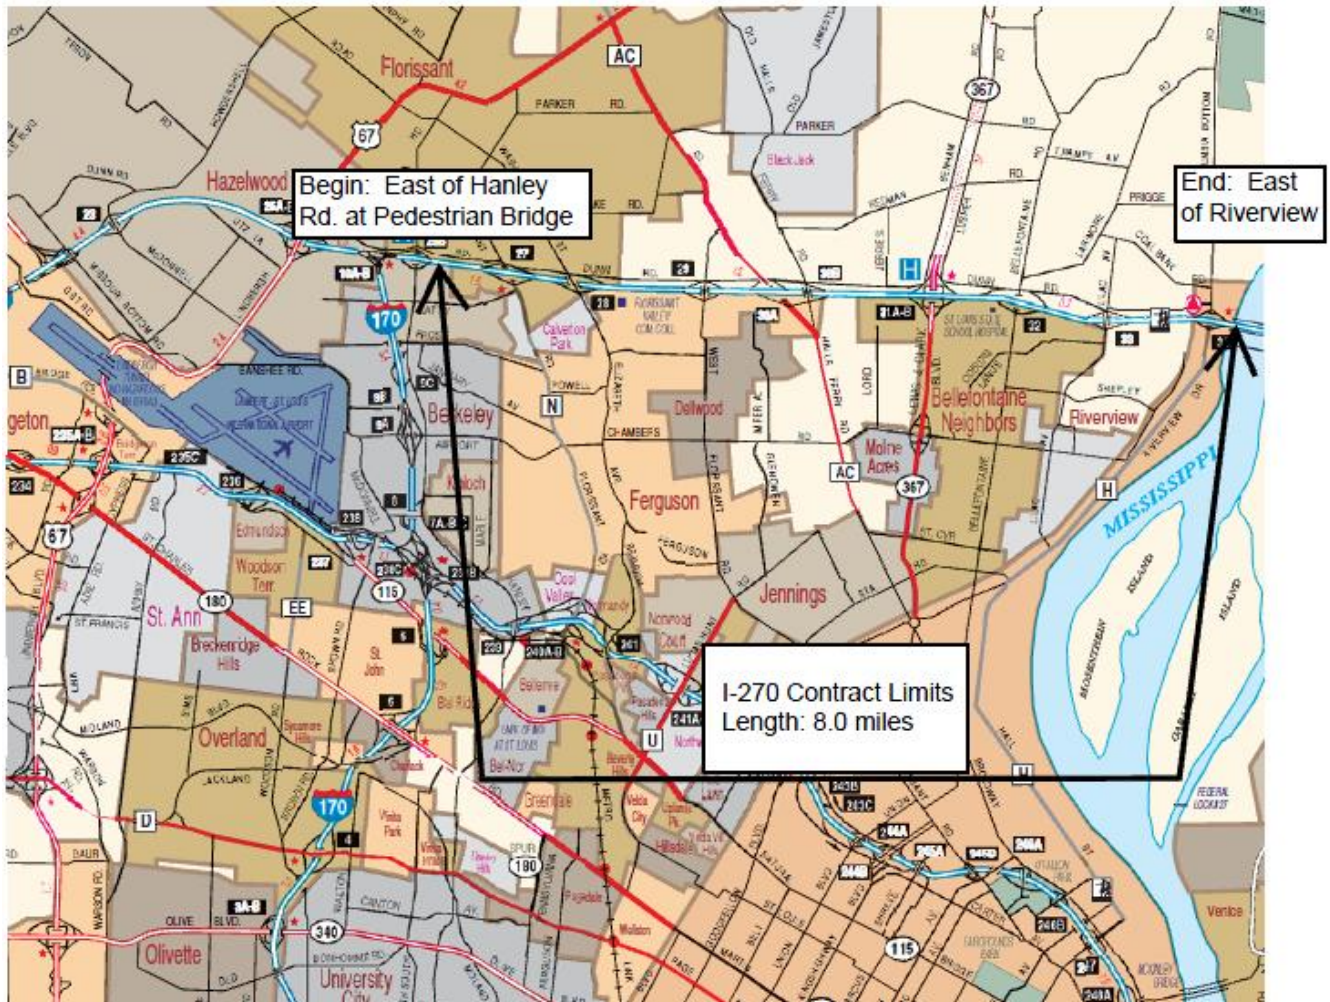

Contract Term and Extension

Initial Contract Term: Commencing [April 1, 2011](#) and shall terminate [November 30, 2011](#)
First Extended Term: Commencing [April 1, 2012](#) and shall terminate [November 30, 2012](#)
Second Extended Term: Commencing [April 1, 2013](#) and shall terminate [November 30, 2013](#)

Contract Limits and Exclusions

The following areas shall be included in the contract limits:

I-270

Begin Point: Pedestrian Bridge located east of Hanley Road (east of I-170 Interchange)
(approximate mile marker 27.0)
End Point: East of Riverview Ramps at Mississippi River
(approximate mile marker 35.0)

MO 367 / I-270 Interchange

Begin Point: Dunn Road intersection north of I-270
End Point: Missouri Veterans Home access road south of I-270

Notes:

- 1) Includes all areas between and adjacent to ramps at interchanges.
- 2) Limits extend to fence line located between I-270 and the North and South Outer Roads (Dunn Road and Pershall Road).
- 3) Some areas between I-270 and the Outer Roads have steep slopes.

Location Specific Details:

Exit 27 New Florissant 15ft both sides of off and on ramps for 15ft cycles, 30ft on right side of off and on ramps and the entire area between the left side of the off and on ramps and the interstate for the 30ft cycle

Exit 28 Washington Elizabeth 15ft both sides off and on ramps for 15ft cycles, 30ft on right side of off and on ramps and entire area between the left side of off and on ramps and interstate for 30ft cycle

Exit 29 West Florissant 15ft both sides of off and on ramps for 15ft cycle, 30ft on right side of off and on ramps and entire area between left side of off and on ramps and interstate for 30ft cycle

Exit 30 New Halls Ferry 15ft both sides off and on ramps for 15ft cycles, 30ft right side of off and on ramps and entire area between left side of ramps and interstate for 30ft cycles

Exit 31 367 15ft both sides of all ramps for 15ft cycles, 30ft on the right side of the outer most ramps and entire area between left side of outer most ramps and interstate including the clover leafs.

For the 30ft cycle entire area between fence and inter state should be mowed from Lindberg to mile marker 31.4

Exit 32 Bellefontaine Rd. 15ft both sides off and on ramps for 15ft cycles, 30ft right side of off and on ramps and entire area between left side of ramps and interstate for 30ft cycles

Exit 33 Lilac 15ft both sides off and on ramps for 15ft cycles, 30ft right side of off and on ramps and entire area between left side of ramps and interstate for 30ft cycles

Entire median mowed out every cycle between Lilac and Riverview

Exit 34 Riverview 15ft both sides off and on ramps for 15ft cycles, 30ft right side of off and on ramps and entire area between left side of ramps and interstate for 30ft cycles

Exclusions: The following are known areas that shall be excluded from the contract limits unless otherwise directed by the engineer:

<u>ROUTE</u>	<u>DIRECTION</u>	<u>CROSS STREET</u>	<u>DESCRIPTION</u>	<u>ACREAGE</u>
I-270			None	0

TOTAL EXCLUSIONS (APPROXIMATE):

0 ACRES

Mowing Cycles, Litter Removal Cycles, and Preliminary Schedule

April 1 through June 30: 2 mowing cycles

July 1 through November 30: 2 mowing cycles

TOTAL MOWING & LITTER REMOVAL CYCLES:

4

Mowing Quantities

The quantities shown are the total estimated acres to be mowed during one contract term if all areas are mowed and all mowing cycles are authorized. The total area included in the contract limits has been reduced for excluded areas and/or areas mowed and maintained by others.

The quantities are calculated as follows:

TOTAL AREA PER 15' MOWING CYCLE (APPROXIMATE): 60 ACRES
TOTAL AREA PER 30' MOWING CYCLE (APPROXIMATE): 110 ACRES

Total Area in Contract Limits (Acres)	X	Number of Mowing Cycles During Contract Term	=	Total Mowing Quantity During Contract Term (Acres)
60	X	3	=	180
110	X	1	=	110
TOTAL CONTRACT QUANTITY – MOWING:				290 ACRES

Litter Removal Quantities

In accordance with the contract specifications the litter removal area is presumed to be equal to the mowing area.

Total Area in Contract Limits (Acres)	X	Number of Litter Removal Cycles During Contract Term	=	Total Litter Removal Quantity During Contract Term (Acres)
60	X	3	=	180
110	X	1	=	110
TOTAL CONTRACT QUANTITY – MOWING:				290 ACRES

Contract Time for Completion of Work

The contractor shall complete all work required through the entire contract limits within the working days specified below after the notice to proceed date.

Mowing Cycle with Litter Removal Cycle:


60 Acre Cycle: 4 Working Days

110 Acre Cycle: 8 Working Days

Mowing Height & Special Equipment

- 1) Mowing equipment shall have a minimum adjustable height of 3 to 8 inches.
- 2) No special equipment or equipment restrictions are required for this contract.
- 3) The contractor is advised of steep slopes between I-270 and the North and South Outer Roads that require cutting. The contractor shall utilize appropriate equipment as needed to safely cut these steep areas.
- 4) All grass and vegetation shall be cut and trimmed to a height of five (5) inches unless otherwise directed by the engineer.

Special Sign Detail

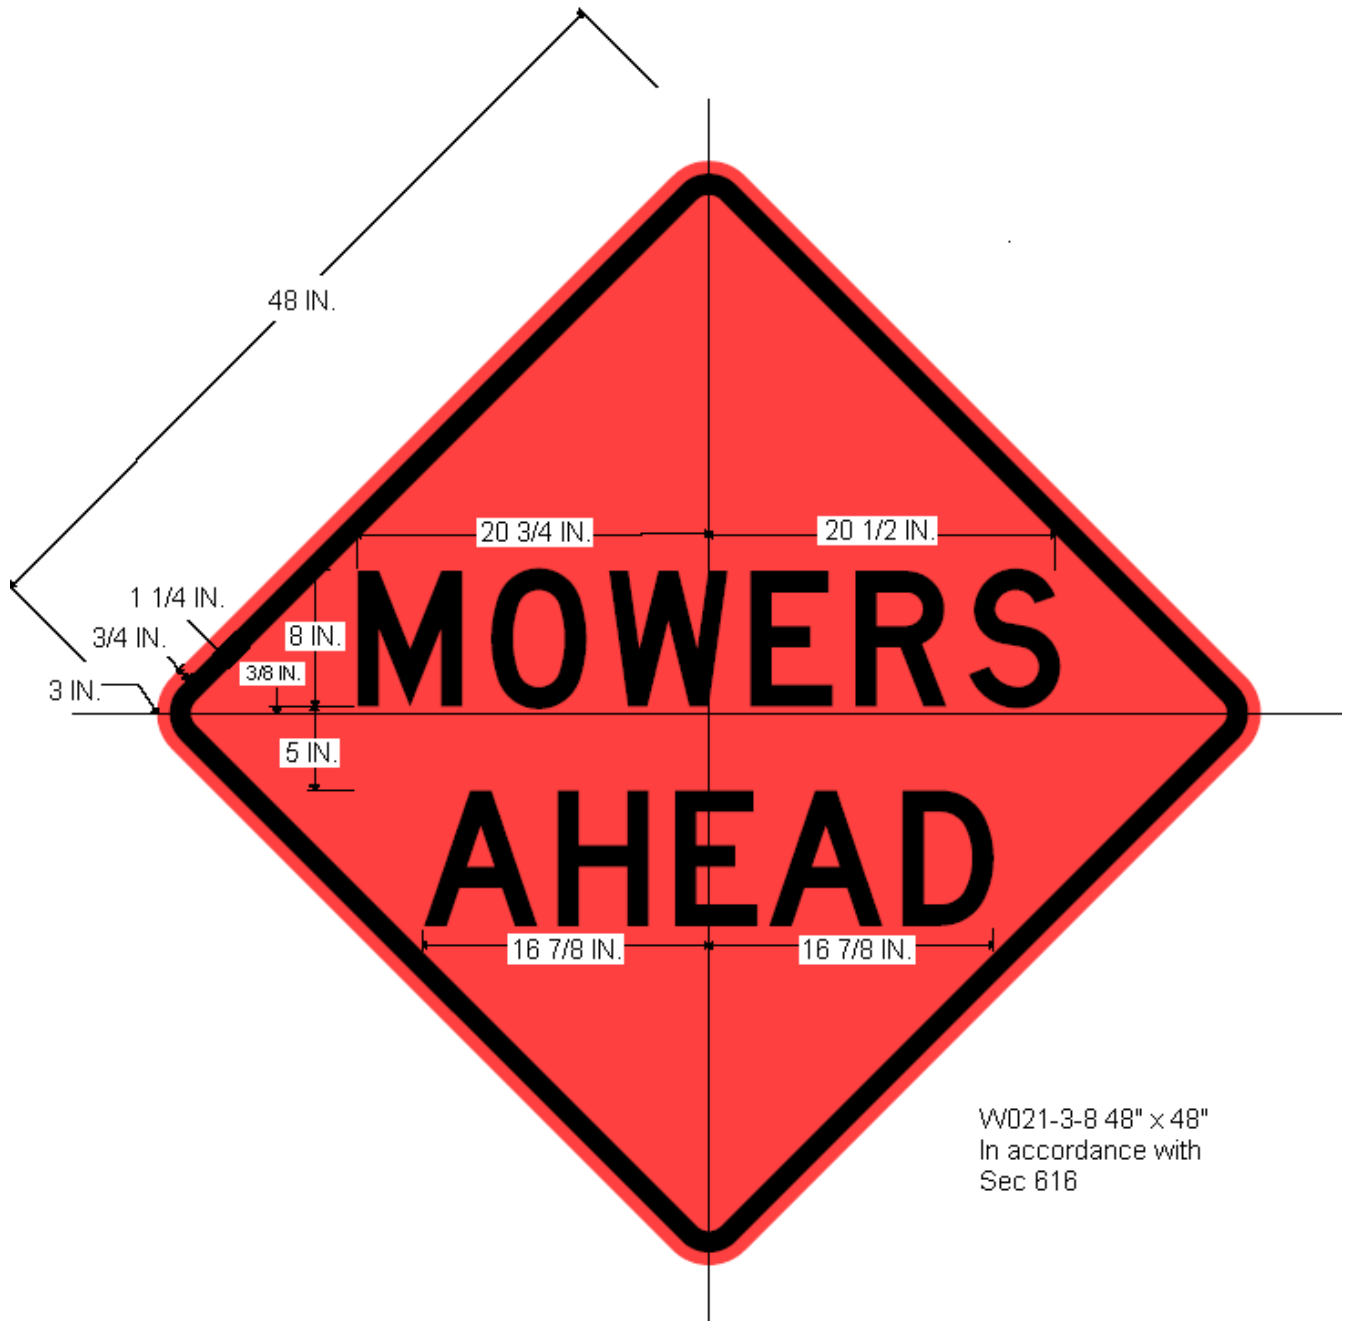

W021-3-8 48" x 48"
In accordance with
Sec 616

COLOR

Legend & Border – Black
Background – Orange

SHEETING

MoDOT Florescent Orange