


Contract Limits and Location Sketch

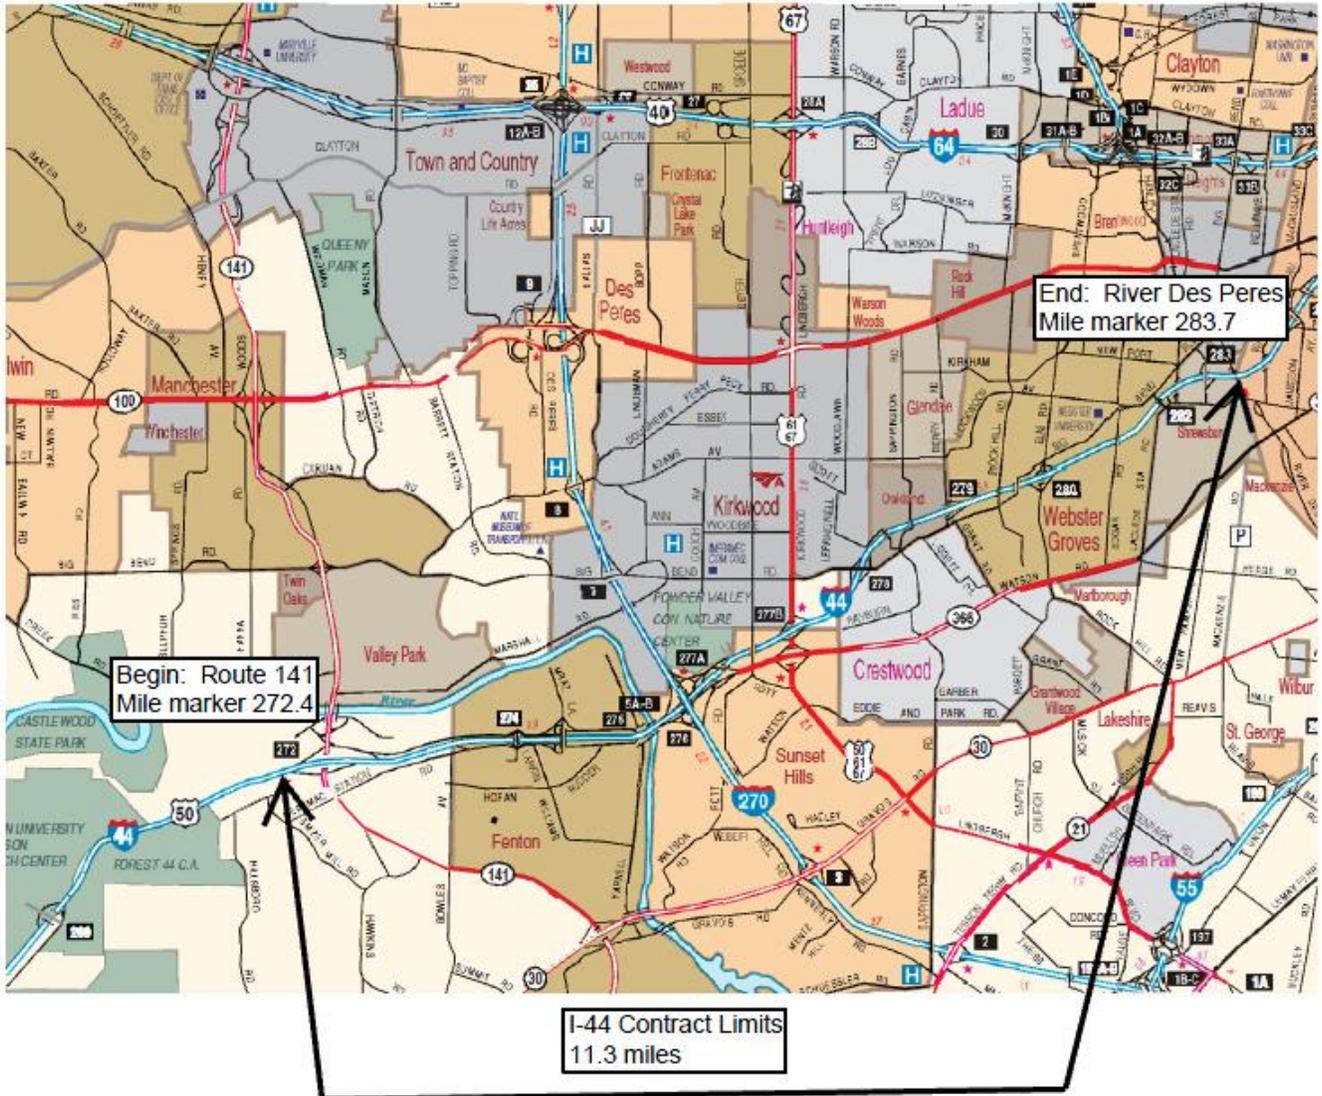

Contract Term and Extension

Initial Contract Term: Commencing [April 1, 2011](#) and shall terminate [November 30, 2011](#)
First Extended Term: Commencing [April 1, 2012](#) and shall terminate [November 30, 2012](#)
Second Extended Term: Commencing [April 1, 2013](#) and shall terminate [November 30, 2013](#)

Contract Limits and Exclusions

The following areas shall be included in the contract limits:

I-44 Project Limits

Begin Point: West of Route 141 Interchange
(approximate mile marker 272.4)
End Point: River Des Peres Bridge
(approximate mile marker 283.7)
Total Length: 11.3 miles
Note: Includes median from Meramec River to I-270

I-44 / I-270 Interchange

Begin Point: North of I-44 at Craigwold Drive overpass
End Point: South of I-44 at Rott Road underpass

West & North Outer Road / Craigwold Road / Stoneywood Road

Includes areas adjacent to Craigwold Road along west side of I-270 north and south of overpass and along north side of I-44 to Geyer Road. Portions are named Stoneywood Road.

Misc. Interchanges along I-44

Includes all areas between and adjacent to ramps at interchanges.

Notes:

- 1) Includes all areas between and adjacent to ramps at interchanges.
- 2) Includes interchanges and outer roads as shown in pictures 7 through 15 below.

Exclusions: The following are known areas that shall be excluded from the contract limits unless otherwise directed by the engineer:

<u>ROUTE</u>	<u>DIRECTION</u>	<u>CROSS STREET</u>	<u>DESCRIPTION</u>	<u>ACREAGE</u>
I-44	EB & WB	Various	Areas mowed by others	N/A
These are areas mowed by adjoining property owners. They are located at numerous sites throughout the contract limits. Areas will be designated by the engineer.				
I-44	EB & WB	Various	Rock cuts along roadway	N/A
The contractor will not be required to mow the top of rock cuts unless the cut is in an interchange or is adjacent to an outer road. The contractor will be required to mow and trim the area from the edge of the pavement to the ditchline along the bottom of rock cuts.				
I-44	EB & WB	Rte I-270 Interchange	Begin at Meramec River west of interchange and end at Geyer Rd east of interchange	10
TOTAL EXCLUSIONS (APPROXIMATE):				15 ACRES

Mowing Cycles, Litter Removal Cycles, and Preliminary Schedule

April 1 through June 30: 2 mowing cycles

July 1 through November 30: 2 mowing cycles

TOTAL MOWING & LITTER REMOVAL CYCLES: 4

Mowing Quantities

The quantities shown are the total estimated acres to be mowed during one contract term if all areas are mowed and all mowing cycles are authorized. The total area included in the contract limits has been reduced for excluded areas and/or areas mowed and maintained by others.

The quantities are calculated as follows:

TOTAL AREA PER 1st, 2nd, and 3rd MOWING CYCLEs (APPROXIMATE): 65 ACRES
TOTAL AREA PER 4th MOWING CYCLE (APPROXIMATE): 115 ACRES

Total Area in Contract Limits (Acres)	X	Number of Mowing Cycles During Contract Term	=	Total Mowing Quantity During Contract Term (Acres)
65	X	3	=	195
115	X	1	=	115
TOTAL CONTRACT QUANTITY – MOWING:				310 ACRES

Litter Removal Quantities

In accordance with the contract specifications the litter removal area is presumed to be equal to the mowing area.

Total Area in Contract Limits (Acres)	X	Number of Litter Removal Cycles During Contract Term	=	Total Litter Removal Quantity During Contract Term (Acres)
65	X	3	=	195
115	X	1	=	115

TOTAL CONTRACT QUANTITY – LITTER REMOVAL: 310 ACRES

Contract Time for Completion of Work

The contractor shall complete all work required through the entire contract limits within the working days specified below after the notice to proceed date.

Mowing Cycle with Litter Removal Cycle:


65 Acre Cycle: 5 Working Days

115 Acre Cycle: 8 Working Days

Mowing Height & Special Equipment

- 1) Mowing equipment shall have a minimum adjustable height of 3 to 8 inches.
- 2) No special equipment or equipment restrictions are required for this contract.
- 3) All grass and vegetation shall be cut and trimmed to a height of five (5) inches unless otherwise directed by the engineer.

Special Sign Detail

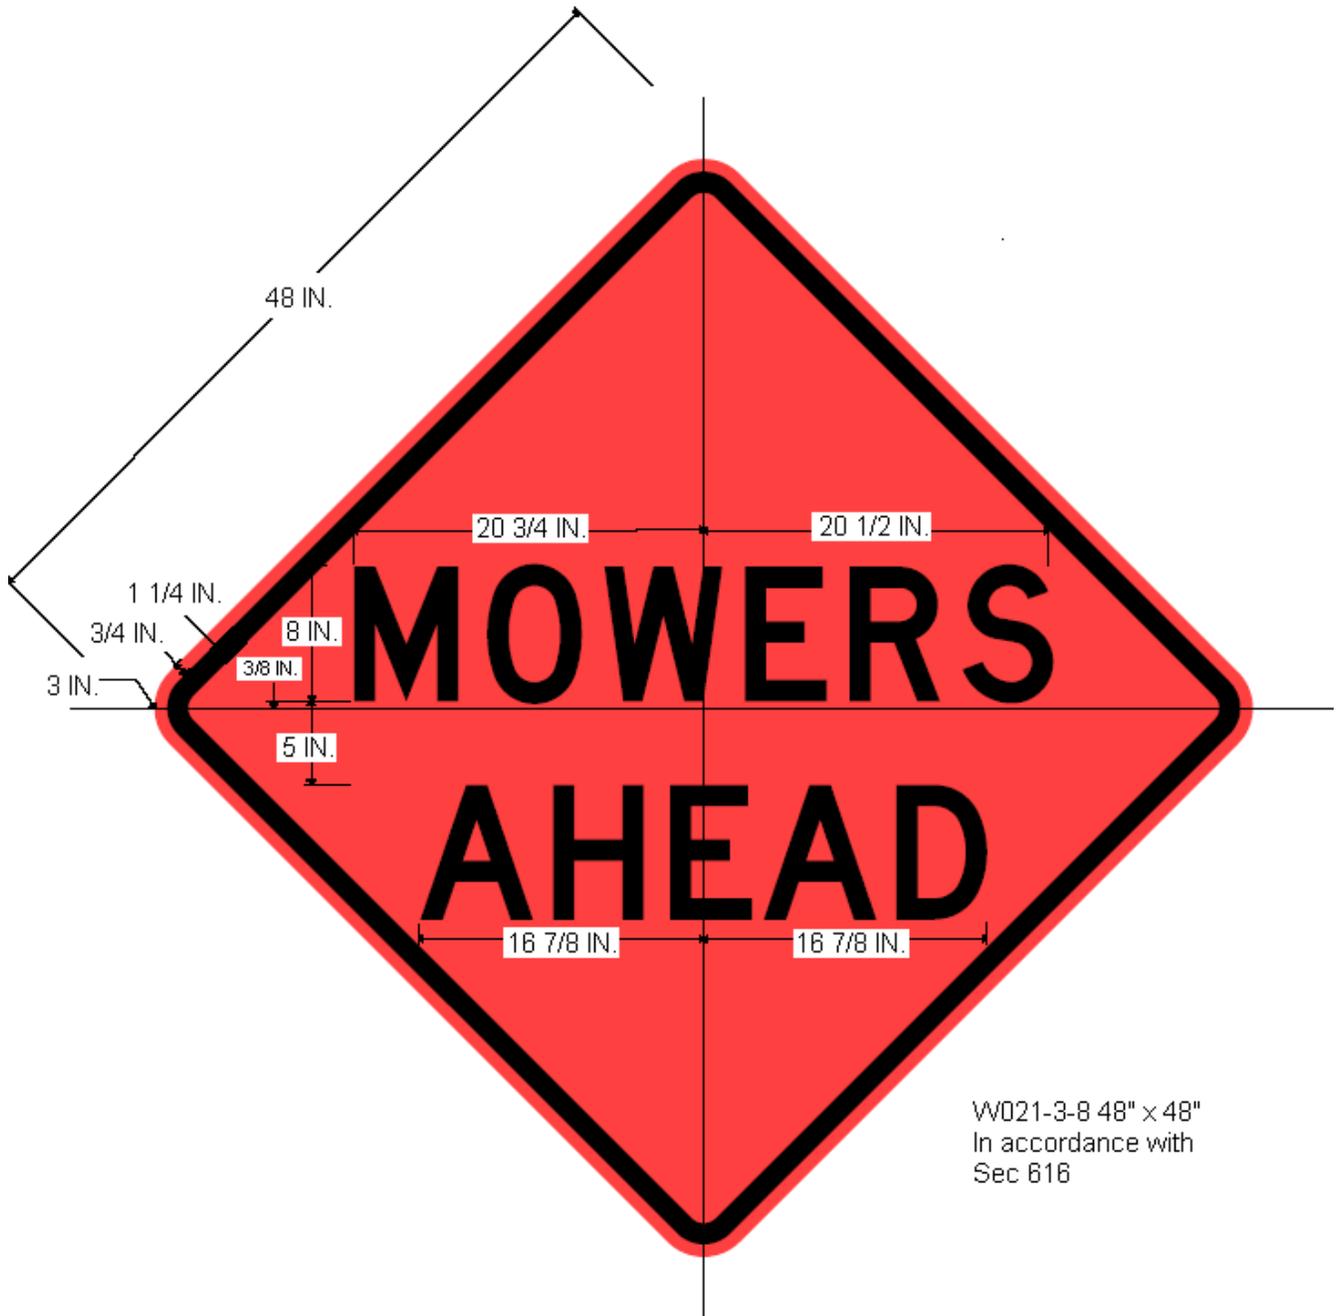

W021-3-8 48" x 48"
In accordance with
Sec 816

COLOR

Legend & Border – Black
Background – Orange

SHEETING

MoDOT Fluorescent Orange

EXHIBIT A

Mowing Project #D6-2011-J
Route I-44
St. Louis County
Project Detail Sheet 7 of 15





