


Contract Limits and Location Sketch

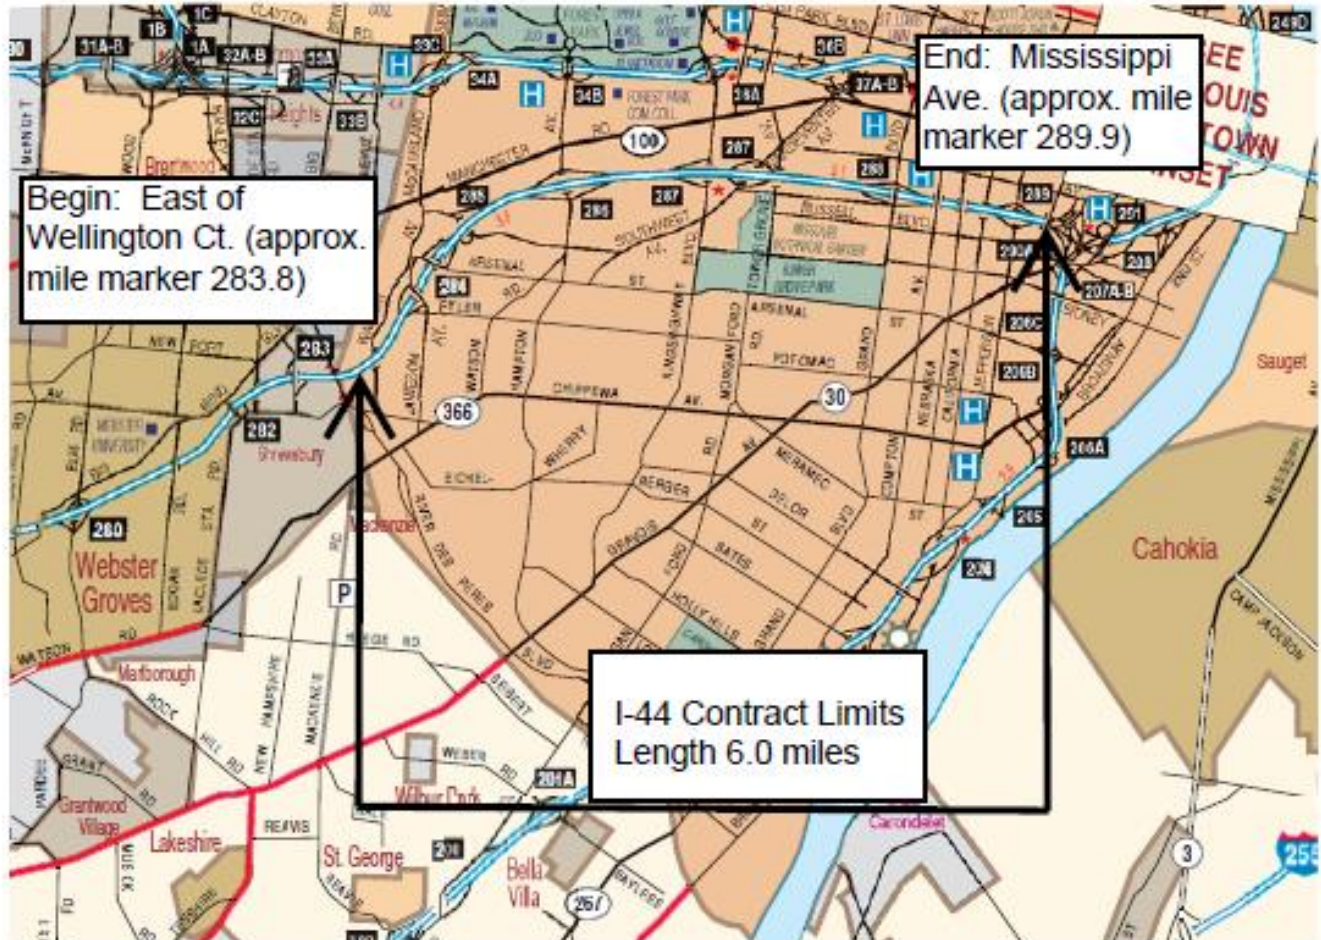

Contract Term and Extension

Initial Contract Term: Commencing [April 1, 2011](#) and shall terminate [November 30, 2011](#)
First Extended Term: Commencing [April 1, 2012](#) and shall terminate [November 30, 2012](#)
Second Extended Term: Commencing [April 1, 2013](#) and shall terminate [November 30, 2013](#)

Contract Limits and Exclusions

The following areas shall be included in the contract limits:

I-55

Begin Point: St Louis City Limits (East of Wellington Ct)
(approximate mile marker 283.8)
End Point: Mississippi Avenue (1/4 mile west of I-55)
(approximate mile marker 289.9)

Notes:

1) Includes all areas between and adjacent to ramps at interchanges.

Exclusions: The following are known areas that shall be excluded from the contract limits unless otherwise directed by the engineer:

<u>ROUTE</u>	<u>DIRECTION</u>	<u>CROSS STREET</u>	<u>DESCRIPTION</u>	<u>ACREAGE</u>
I-44		Interchange at Hampton Avenue	Mowing and litter by MoDOT landscape crews.	4
I-44	Eastbound	Area between I-44 and the Hampton Maintenance Facility	Mowing and litter by MoDOT landscape crews.	2

Interchange exceptions include interior and exterior of ramps from the gore point to the crossroad.

TOTAL EXCLUSIONS (APPROXIMATE):

6 ACRES

Mowing Cycles and Preliminary Schedule**April 1 through November 30 5 mowing cycles****TOTAL MOWING CYCLES: 5****Mowing Quantities**

The quantities shown are the total estimated acres to be mowed during one contract term if all areas are mowed and all mowing cycles are authorized. The total area included in the contract limits has been reduced for excluded areas and/or areas mowed and maintained by others.

The quantities are calculated as follows:

Total Area Per Mowing Cycle (Approximate): 109 Acres

Total Area in Contract Limits (Acres)	X	Number of Mowing Cycles During Contract Term	=	Total Mowing Quantity During Contract Term (Acres)
109	X	5	=	545

TOTAL CONTRACT QUANTITY - MOWING: 545 ACRES**Litter Removal Quantities**

In accordance with the contract specifications the litter removal area is presumed to be equal to the accepted mowing area.

TOTAL CONTRACT QUANTITY – LITTER REMOVAL: 545 ACRES

Contract Time for Completion of Work

The contractor shall complete all work required for each mowing cycle through the entire contract limits within the working days specified below after the notice to proceed date.

9 Working Days

Mowing Height & Special Equipment

- 1) Mowing equipment shall have a minimum adjustable height of 2 to 6 inches.
- 2) Mowing equipment for this contract shall be capable of lower cutting heights than used in more wide open, lesser mowed areas. Equipment shall be capable of mowing within constricted areas not generally accessible to large mechanical equipment. Large rural farm-type mowing equipment may be used if the contractor can demonstrate acceptable mowing results to the satisfaction of the engineer. Equipment shall not rut or damage the existing turf and soil on slopes.
- 3) All grass and vegetation shall be cut and trimmed to a height of four (4) inches unless otherwise directed by the engineer.

Special Sign Detail

