


Contract Limits and Location Sketch

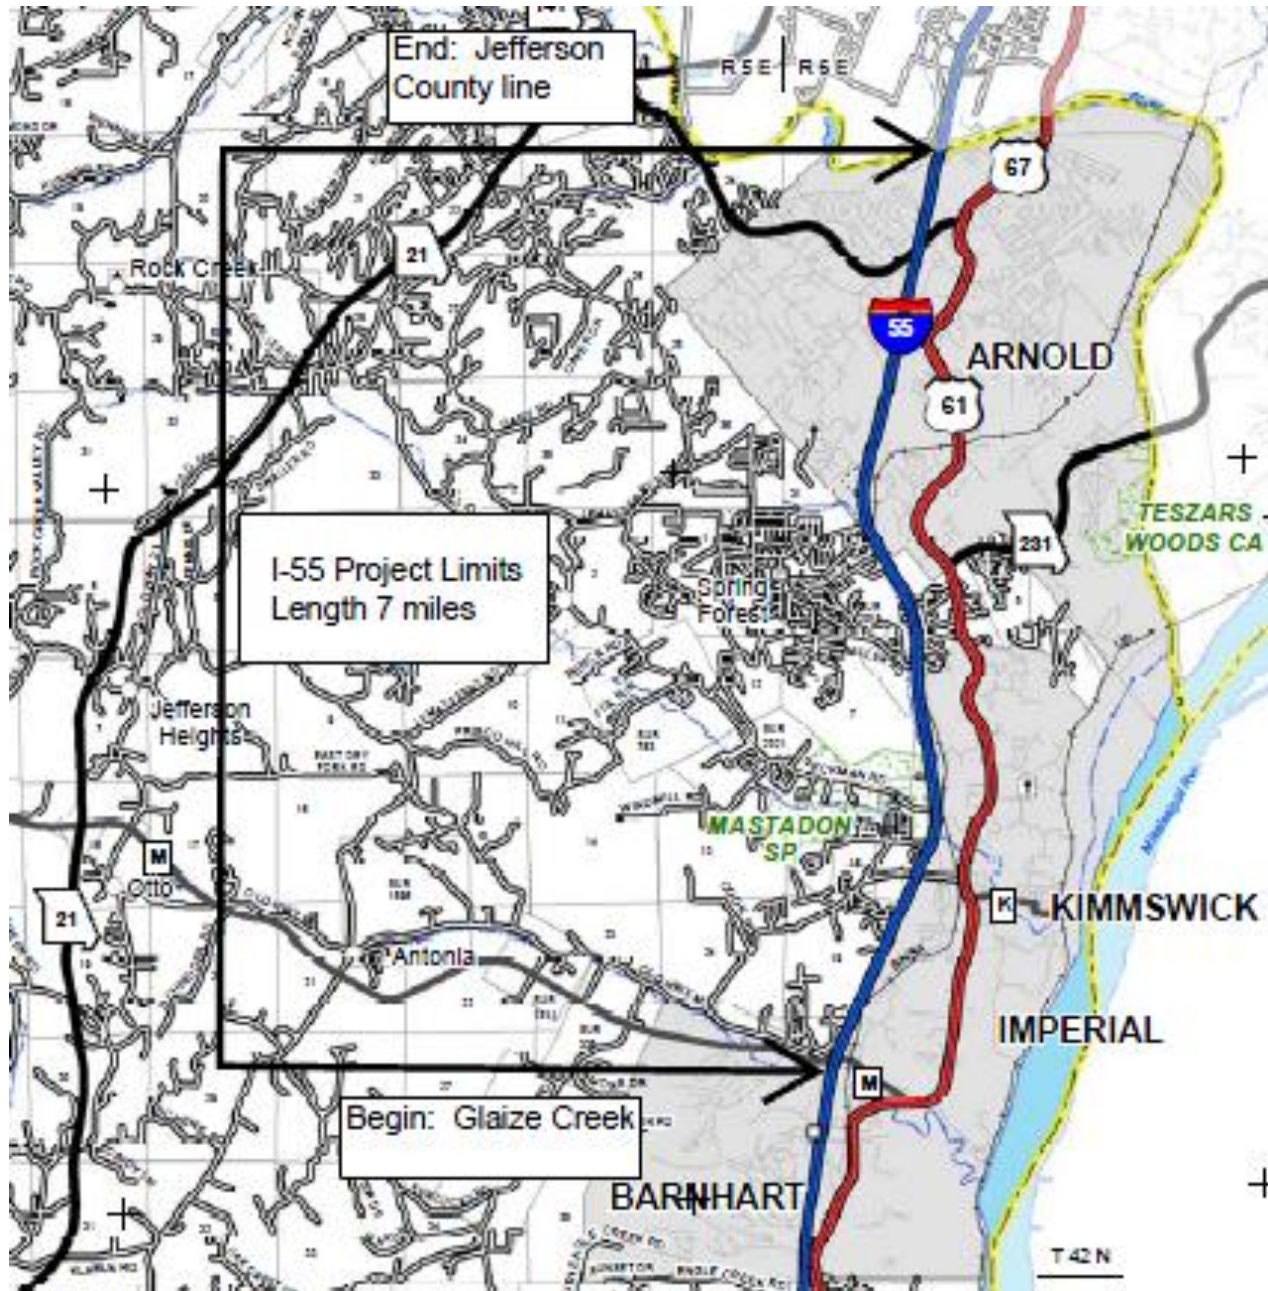

Contract Term and Extension

Initial Contract Term: Commencing [April 1, 2011](#) and shall terminate [November 30, 2011](#)
First Extended Term: Commencing [April 1, 2012](#) and shall terminate [November 30, 2012](#)
Second Extended Term: Commencing [April 1, 2013](#) and shall terminate [November 30, 2013](#)

Contract Limits and Exclusions

The following areas shall be included in the contract limits:

Route I-55 Project Limits

Begin Point: South of the Route M Interchange, MM 185

End Point: Jefferson/ St Louis County Line, MM 192

Note: Includes interchanges and outer roads as shown in pictures 6 through 15 below.

Exclusions: All areas that shall be excluded from the contract limits are shown in the pictures below unless otherwise directed by the engineer.

Mowing Cycles, Litter Removal Cycles, and Preliminary Schedule**April 1 through June 30: 2 mowing cycles****July 1 through November 30: 2 mowing cycles****TOTAL MOWING & LITTER REMOVAL CYCLES: 4****Mowing Quantities**

The quantities shown are the total estimated acres to be mowed during one contract term if all areas are mowed and all mowing cycles are authorized. The total area included in the contract limits has been reduced for excluded areas and/or areas mowed and maintained by others.

The quantities are calculated as follows:

TOTAL AREA PER PARTIAL MOWING CYCLE (APPROXIMATE): 55 ACRES
TOTAL AREA PER FULL MOWING CYCLE (APPROXIMATE): 80 ACRES

Total Area in Contract Limits (Acres)	X	Number of Mowing Cycles During Contract Term	=	Total Mowing Quantity During Contract Term (Acres)
55	X	3	=	165
80	X	1	=	80

TOTAL CONTRACT QUANTITY – MOWING: 245 ACRES

Litter Removal Quantities

In accordance with the contract specifications the litter removal area is presumed to be equal to the mowing area.

Total Area in Contract Limits (Acres)	X	Number of Litter Removal Cycles During Contract Term	=	Total Litter Removal Quantity During Contract Term (Acres)
55	X	3	=	165
80	X	1	=	80

TOTAL CONTRACT QUANTITY – LITTER REMOVAL: 245 ACRES

Contract Time for Completion of Work

The contractor shall complete all work required through the entire contract limits within the working days specified below after the notice to proceed date.

Mowing Cycle with Litter Removal Cycle:


55 Acre Cycle: 4 Working Days

80 Acre Cycle: 6 Working Days

Mowing Height & Special Equipment

- 1) Mowing equipment shall have a minimum adjustable height of 3 to 8 inches.
- 2) No special equipment or equipment restrictions are required for this contract.
- 3) All grass and vegetation shall be cut and trimmed to a height of five (5) inches unless otherwise directed by the engineer.

Special Sign Detail

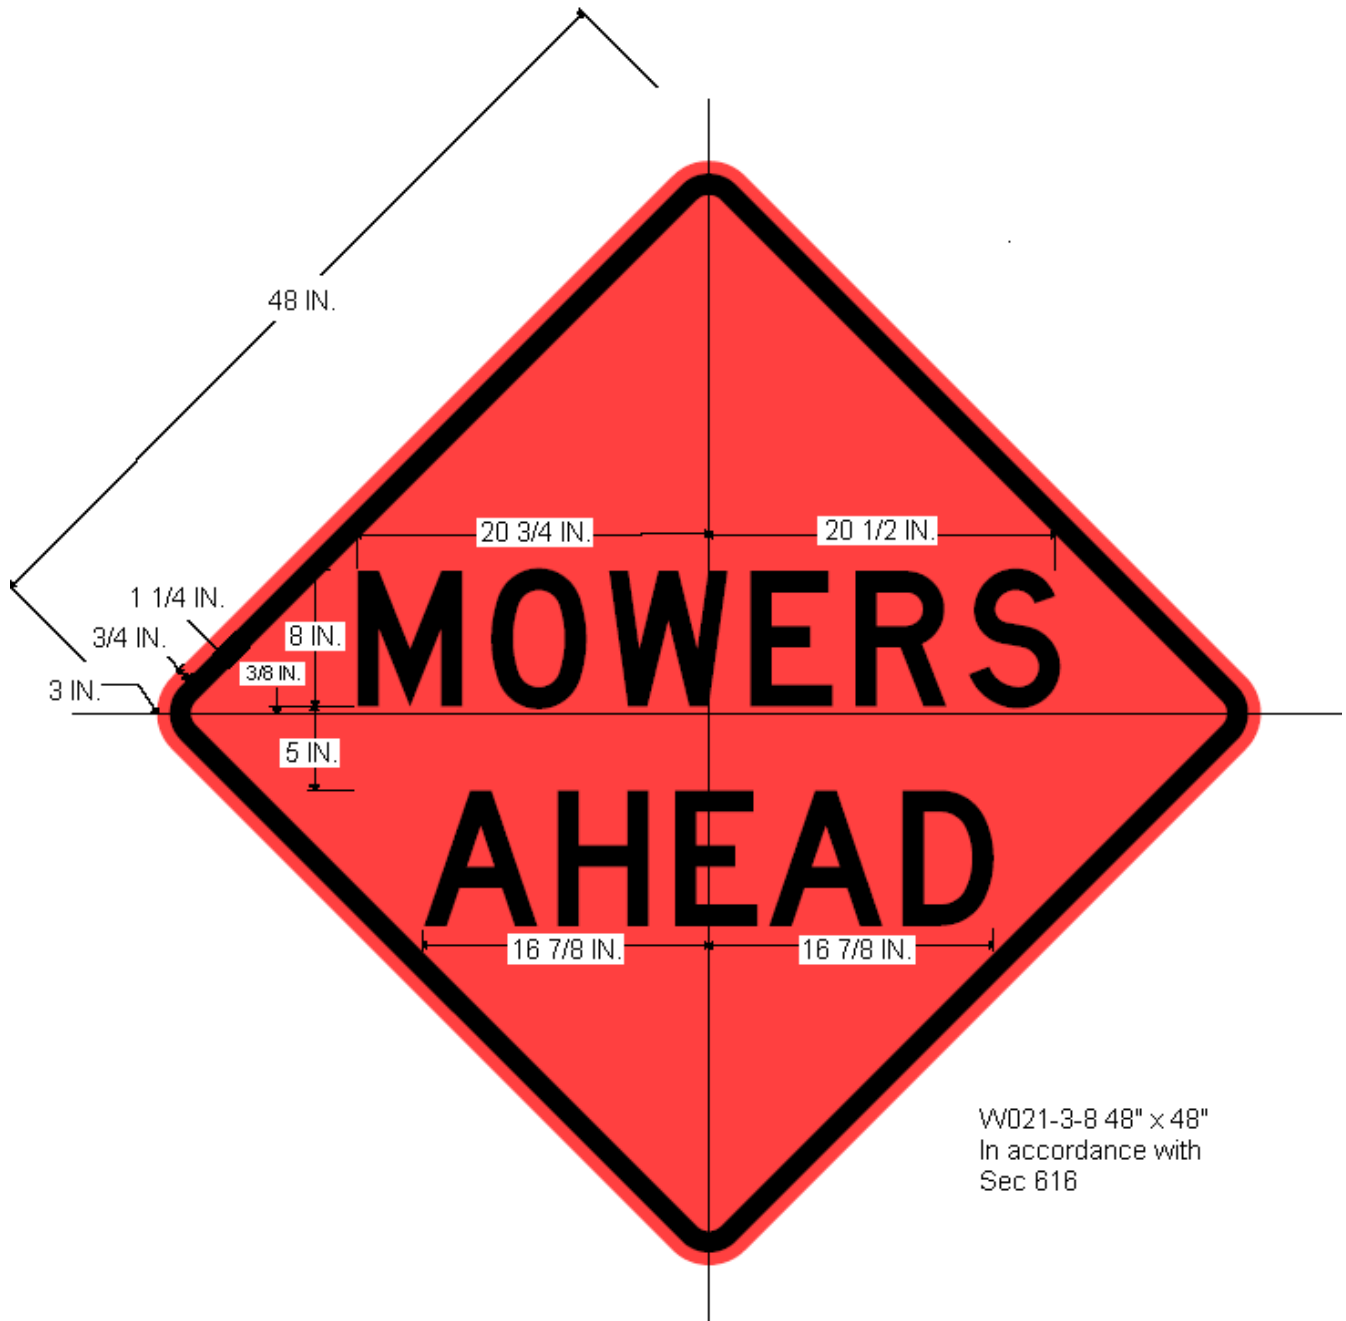

W021-3-8 48" x 48"
In accordance with
Sec 616

COLOR

Legend & Border – Black
Background – Orange

SHEETING

MoDOT Florescent Orange















EXHIBIT A

Mowing Project #D6-2011-M
Route I-55
Jefferson County
Project Detail Sheet 13 of 15





