


Contract Limits and Location Sketch

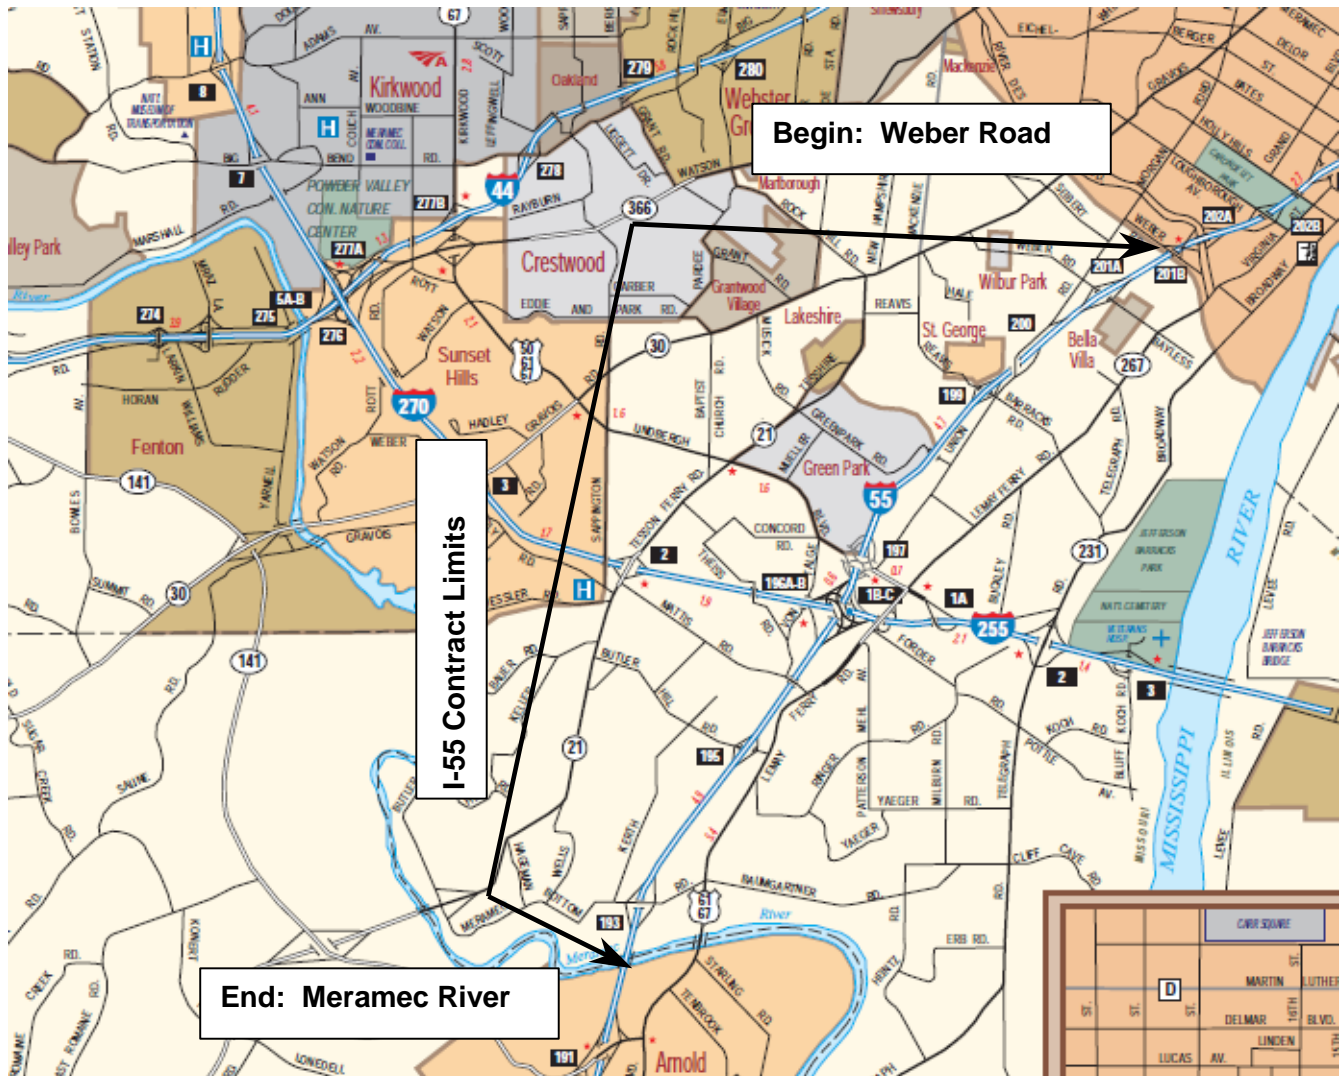

Contract Term and Extension

Initial Contract Term: Commencing [April 1, 2011](#) and shall terminate [November 30, 2011](#)
First Extended Term: Commencing [April 1, 2012](#) and shall terminate [November 30, 2012](#)
Second Extended Term: Commencing [April 1, 2013](#) and shall terminate [November 30, 2013](#)

Contract Limits and Exclusions

The following areas shall be included in the contract limits:

I-55 Project Limits

Begin Point: Weber Road (St. Louis City Limits)

End Point: Meramec River Bridge

Total Length: 8.8 miles

Note: Includes median north of Lindbergh Blvd (Route 61/67)

I-55 / I-270 Interchange

Begin Point: West of I-55 at Von Talge Road underpass

End Point: East of I-55 at pedestrian overpass just west of Route 61/67 overpass

Misc. Interchanges along I-55

Includes all areas between and adjacent to ramps at interchanges.

West Outer Road / Spokane Road

Begin Point: Reavis Barracks

End Point: South to end state maintenance

Note: Includes all grassy areas around commuter lot.

West Outer Road / Little Rock Road

Begin Point: Butler Hill Road

End Point: North to end state maintenance

Notes:

- 1) Includes all areas between and adjacent to ramps at interchanges.
- 2) Includes interchanges and outer roads as shown in pictures 7 through 16 below.

Exclusions: The following are known areas that shall be excluded from the contract limits unless otherwise directed by the engineer:

<u>ROUTE</u>	<u>DIRECTION</u>	<u>CROSS STREET</u>	<u>DESCRIPTION</u>	<u>ACREAGE</u>
I-55	NB & SB	Various	Areas mowed by others	N/A
These are areas mowed by adjoining property owners. They are located at numerous sites throughout the contract limits. Areas will be designated by the engineer.				
I-55	NB & SB	Various	Rock cuts along roadway	N/A
The contractor will not be required to mow the top of rock cuts unless the cut is in an interchange or is adjacent to an outer road. The contractor will be required to mow and trim the area from the edge of the pavement to the ditchline along the bottom of rock cuts.				

TOTAL EXCLUSIONS (APPROXIMATE):

5 ACRES

Mowing Cycles, Litter Removal Cycles, and Preliminary Schedule

April 1 through June 30: 2 mowing cycles

July 1 through November 30: 2 mowing cycles

TOTAL MOWING & LITTER REMOVAL CYCLES: 4

Mowing Quantities

The quantities shown are the total estimated acres to be mowed during one contract term if all areas are mowed and all mowing cycles are authorized. The total area included in the contract limits has been reduced for excluded areas and/or areas mowed and maintained by others.

The quantities are calculated as follows:

T
TOTAL AREA PER 1st, 2nd, and 3rd MOWING CYCLES (APPROXIMATE): 45 ACRES
TOTAL AREA PER 4th MOWING CYCLE (APPROXIMATE): 75 ACRES

Total Area in Contract Limits (Acres)	X	Number of Mowing Cycles During Contract Term	=	Total Mowing Quantity During Contract Term (Acres)
45	X	3	=	135
75	X	1	=	75
TOTAL CONTRACT QUANTITY – MOWING:				210 ACRES

Litter Removal Quantities

In accordance with the contract specifications the litter removal area is presumed to be equal to the mowing area.

Total Area in Contract Limits (Acres)	X	Number of Litter Removal Cycles During Contract Term	=	Total Litter Removal Quantity During Contract Term (Acres)
45	X	3	=	135
75	X	1	=	75
TOTAL CONTRACT QUANTITY – LITTER REMOVAL:				210 ACRES

Contract Time for Completion of Work


The contractor shall complete all work required through the entire contract limits within the working days specified below after the notice to proceed date.

Mowing Cycle with Litter Removal Cycle:
45 Acre Cycle: 3 Working Days
75 Acre Cycle: 5 Working Days

Mowing Height & Special Equipment

- 1) Mowing equipment shall have a minimum adjustable height of 3 to 8 inches.
- 2) No special equipment or equipment restrictions are required for this contract.
- 3) All grass and vegetation shall be cut and trimmed to a height of five (5) inches unless otherwise directed by the engineer.

Special Sign Detail

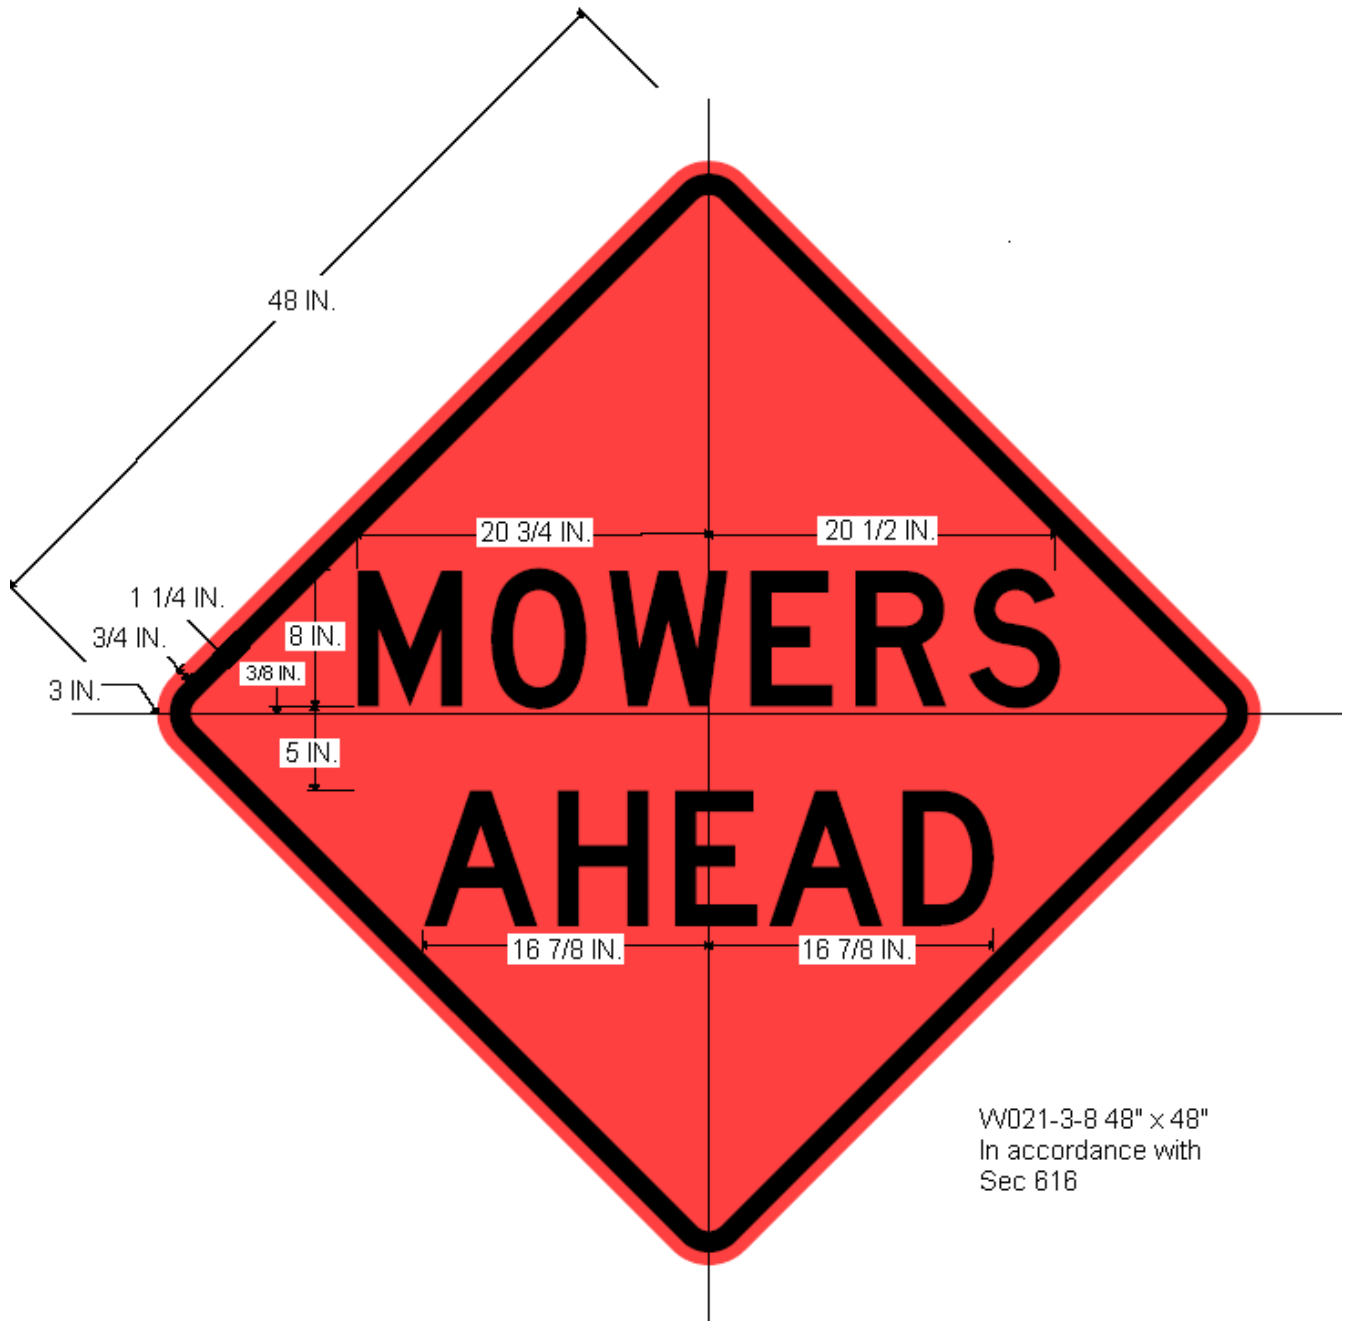

W021-3-8 48" x 48"
In accordance with
Sec 616

COLOR

Legend & Border – Black
Background – Orange

SHEETING

MoDOT Fluorescent Orange



I-55 St. Louis City limits (Weber Rd) to MO-M













Mowing Project #D6-2011-N
Route I-55
St. Louis County
Project Detail Sheet 14of16

