


Contract Limits and Location Sketch

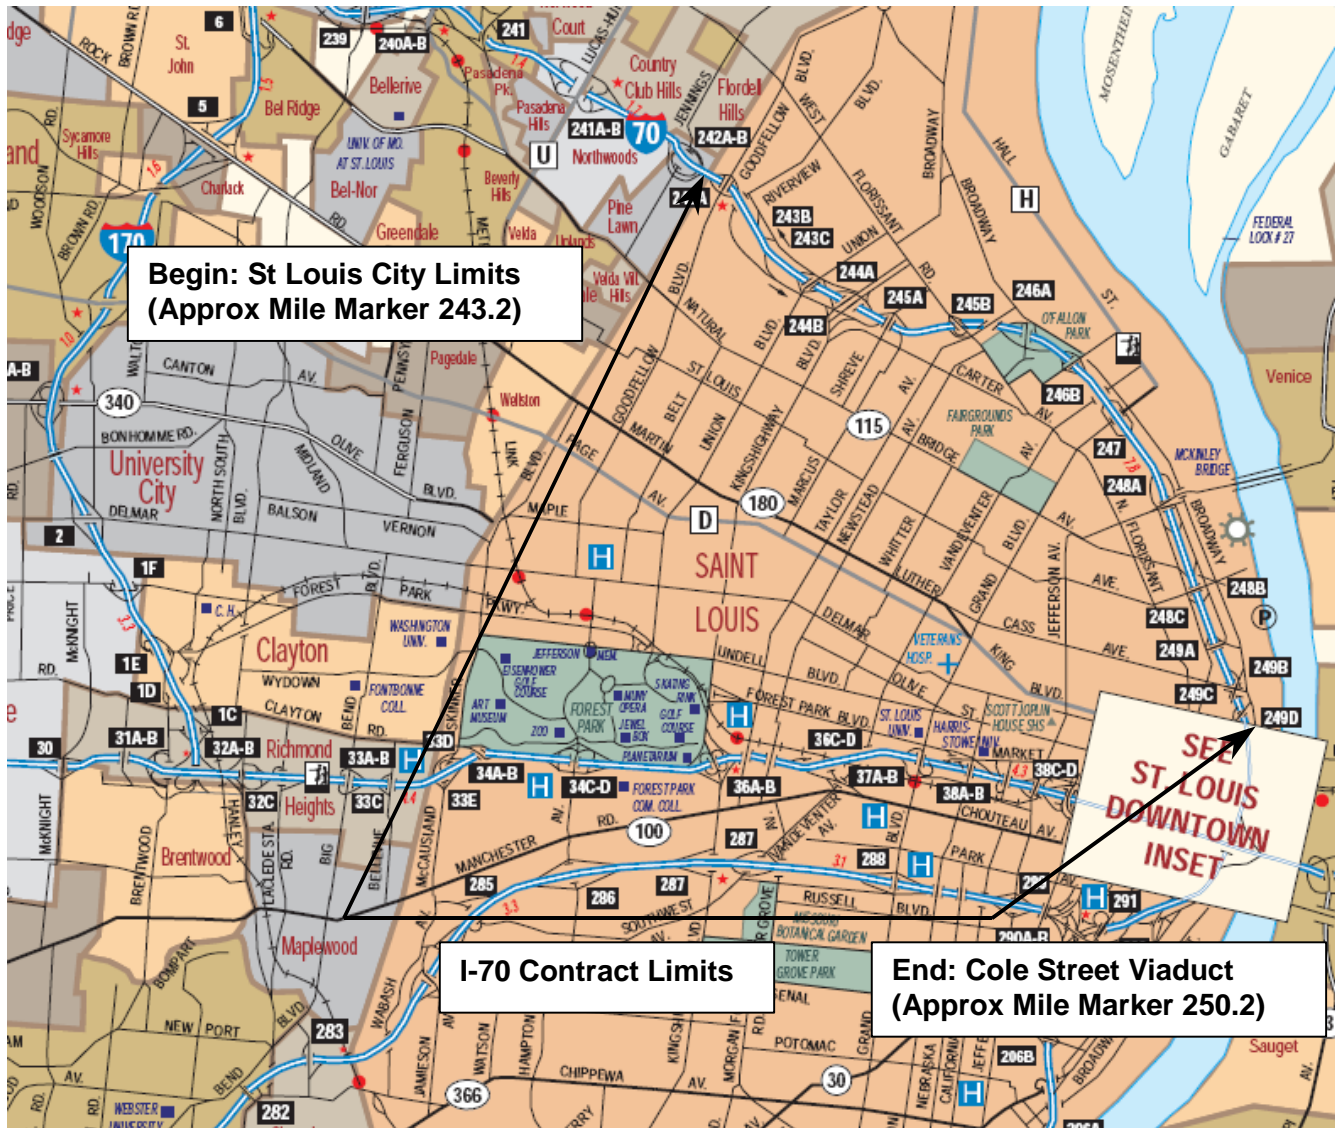

Contract Term and Extension

Initial Contract Term: Commencing April 1, 2011 and shall terminate November 30, 2011
First Extended Term: Commencing April 1, 2012 and shall terminate November 30, 2012
Second Extended Term: Commencing April 1, 2013 and shall terminate November 30, 2013

Contract Limits and Exclusions

The following areas shall be included in the contract limits:

I-70

Begin Point: St Louis City Limits (west of Goodfellow Avenue)
(approximate mile marker 243.2)
End Point: Cole Street Viaduct
(approximate mile marker 250.2)

Location Specific Details:

- 1) Parcel Located at Eastbound I-70 Exit onto Bircher Blvd East of Shreve Ave
 - Triangular parcel of land bounded by Sexauer Ave to the west, Bircher Blvd to the north, and the alley to the east.
- 2) Northwest Quadrant of Westbound I-70 at East Taylor:
 - Triangular parcel of land bounded by E Taylor Ave to the northwest, private parcel to the northeast, and the fence along I-70 to the south.

Notes:

- 1) Includes all areas between and adjacent to ramps at interchanges.

Exclusions: The following are known areas that shall be excluded from the contract limits unless otherwise directed by the engineer:

<u>ROUTE</u>	<u>DIRECTION</u>	<u>CROSS STREET</u>	<u>DESCRIPTION</u>	<u>ACREAGE</u>
I-70		Various	Daffodil beds (See note below *)	N/A

* Note: Most interchanges along this section of I-70 have daffodil beds which bloom in the spring. The beds shall be left undisturbed and mowed around until approximately June 15 or as otherwise directed by the engineer. No deduction from the total mowing acres has been made.

TOTAL EXCLUSIONS (APPROXIMATE):

0 ACRES

Mowing Cycles and Preliminary Schedule**April 1 through November 30 5 mowing cycles****TOTAL MOWING CYCLES: 5****Mowing Quantities**

The quantities shown are the total estimated acres to be mowed during one contract term if all areas are mowed and all mowing cycles are authorized. The total area included in the contract limits has been reduced for excluded areas and/or areas mowed and maintained by others.

The quantities are calculated as follows:

Total Area Per Mowing Cycle (Approximate): 105 Acres

Total Area in Contract Limits (Acres)	X	Number of Mowing Cycles During Contract Term	=	Total Mowing Quantity During Contract Term (Acres)
105	X	5	=	525

TOTAL MOWING QUANTITY: 525 ACRES**Litter Removal Quantities**

In accordance with the contract specifications the litter removal area is presumed to be equal to the accepted mowing area.

TOTAL CONTRACT QUANTITY – LITTER REMOVAL:**525 ACRES**

Contract Time for Completion of Work

The contractor shall complete all work required for each mowing cycle through the entire contract limits within the working days specified below after the notice to proceed date.

9 Working Days

Mowing Height & Special Equipment

- 1) Mowing equipment shall have a minimum adjustable height of **2 to 6** inches.
- 2) Mowing equipment for this contract shall be capable of lower cutting heights than used in more wide open, lesser mowed areas. Equipment shall be capable of mowing within constricted areas not generally accessible to large mechanical equipment. Large rural farm-type mowing equipment may be used if the contractor can demonstrate acceptable mowing results to the satisfaction of the engineer. Equipment shall not rut or damage the existing turf and soil on slopes.
- 3) All grass and vegetation shall be cut and trimmed to a height of **four (4)** inches unless otherwise directed by the engineer.

Special Sign Detail

