


### Contract Limits and Location Sketch

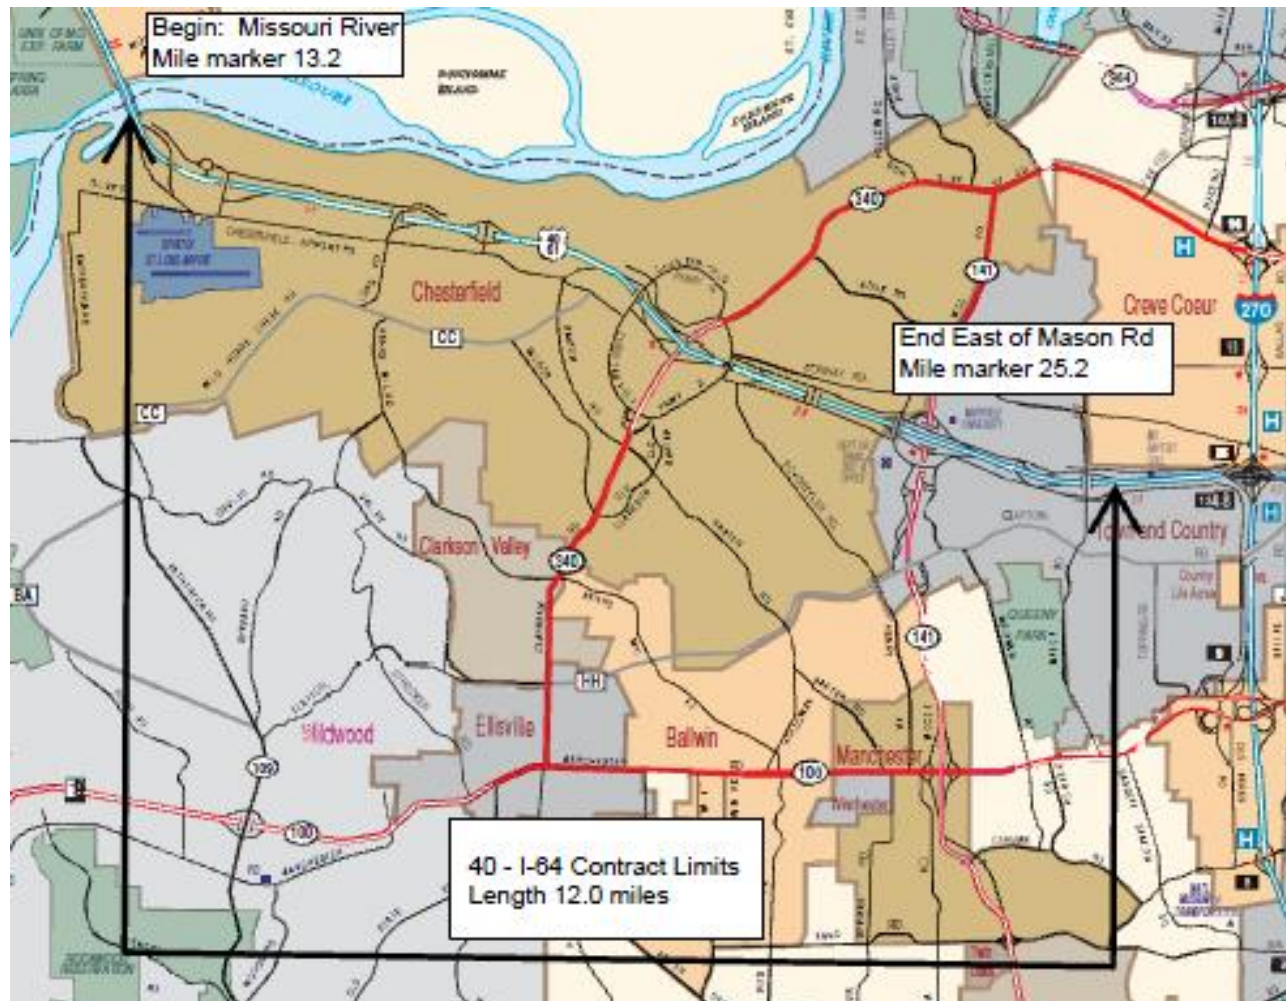

### **Contract Term and Extension**

Initial Contract Term: Commencing [April 1, 2011](#) and shall terminate [November 30, 2011](#)  
First Extended Term: Commencing [April 1, 2012](#) and shall terminate [November 30, 2012](#)  
Second Extended Term: Commencing [April 1, 2013](#) and shall terminate [November 30, 2013](#)

### **Contract Limits and Exclusions**

**The following areas shall be included in the contract limits:**

#### **Route 40**

Begin Point: Missouri River (MM 13.4)

End Point: East of Mason Rd, West of I-270 Interchange (MM 25.2)

#### **MM: 13.4 – 14.6**

Full Mow Out: 32.67 Acres

Acres Per Edge Cut: 12.84 Acres

#### **MM: 14.6-16.2**

Full Mow Out: 30.8 Acres

Acres Per Edge Cut: 16.03 Acres

#### **MM: 16.2-18.2**

Full Mow Out: 22.06 Acres

Acres Per Edge Cut: 11.71 Acres

#### **MM: 18.2-18.6**

Full Mow Out: 8.89 Acres

Acres Per Edge Cut: 6.26 Acres

#### **MM: 18.6-19.2**

Full Mow Out: 5.98 Acres

Acres Per Edge Cut: 6.50 Acres

#### **MM: 19.2-19.8**

Full Mow Out: 6.89 Acres

Acres Per Edge Cut: 3.84

#### **MM: 19.8-20.4 340 to Chesterfield Parkway (East)**

Full Mow Out Acres: 1.4 Acres

20 FT Perimeter Acres Cut: 1.4

#### **MM: 20.4-21.4 Chesterfield Parkway (East) to Timberlake**

Full Mow Out Acres: 6.4 Acres

20FT Perimeter Acres Cut: 6.4

**MM: 21.4-22.4 Timberlake to Woods Mill (Overpass)**

Full Mow Out Acres: 7.2 Acres

20FT Perimeter Acres Cut: 7.2

**MM: 22.4-22.8 141 Interchange**

Full Mow Out Acres: 20.18 Acres

20FT Perimeter Acres Cut: 14.02

**MM: 22.8-23.2 141 to Maryville Center**

Full Mow Out Acres: 2.33Acres

20FT Perimeter Acres Cut: 2.33

**MM: 23.2-24.2 Maryville to Mason**

Full Mow Out Acres: 11.3 Acres

20FT Perimeter Acres Cut: 9.72

**MM: 24.2-25.2 Mason to 270**

Full Mow Out Acres: 11.78 Acres

20 FT Perimeter Acres Cut: 11.78

**Notes:**

1) Includes all areas between and adjacent to ramps at interchanges.

**Exclusions: The following are known areas that shall be excluded from the contract limits unless otherwise directed by the engineer:**

| <u>ROUTE</u> | <u>DIRECTION</u> | <u>CROSS STREET</u> | <u>DESCRIPTION</u> | <u>ACREAGE</u> |
|--------------|------------------|---------------------|--------------------|----------------|
|--------------|------------------|---------------------|--------------------|----------------|

|                                 |  |  |         |
|---------------------------------|--|--|---------|
| TOTAL EXCLUSIONS (APPROXIMATE): |  |  | 0 ACRES |
|---------------------------------|--|--|---------|

**Mowing Cycles, Litter Removal Cycles, and Preliminary Schedule****April 1 through June 30: 2 mowing cycles****July 1 through November 30: 2 mowing cycles**

|                                       |   |
|---------------------------------------|---|
| TOTAL MOWING & LITTER REMOVAL CYCLES: | 4 |
|---------------------------------------|---|

**Mowing Quantities**

The quantities shown are the total estimated acres to be mowed during one contract term if all areas

are mowed and all mowing cycles are authorized. The total area included in the contract limits has been reduced for excluded areas and/or areas mowed and maintained by others.

The quantities are calculated as follows:

**TOTAL AREA PER 15' MOWING CYCLE (APPROXIMATE): 110 ACRES**

**TOTAL AREA PER 30' MOWING CYCLE (APPROXIMATE): 170 ACRES**

| Total Area in<br>Contract Limits<br>(Acres) | X | Number of Mowing<br>Cycles During Contract<br>Term | = | Total Mowing Quantity<br>During Contract Term<br>(Acres) |
|---|---|--|---|--|
|---|---|--|---|--|

|     |   |   |   |     |
|-----|---|---|---|-----|
| 110 | X | 3 | = | 330 |
| 170 | X | 1 | = | 170 |

**TOTAL CONTRACT QUANTITY – MOWING: 500 ACRES**

### Litter Removal Quantities

In accordance with the contract specifications the litter removal area is presumed to be equal to the mowing area.

| Total Area in<br>Contract Limits<br>(Acres) | X | Number of Litter Removal<br>Cycles During Contract<br>Term | = | Total Litter Removal Quantity<br>During Contract Term<br>(Acres) |
|---|---|--|---|--|
|---|---|--|---|--|

|     |   |   |   |     |
|-----|---|---|---|-----|
| 110 | X | 3 | = | 330 |
| 170 | X | 1 | = | 170 |

**TOTAL CONTRACT QUANTITY – LITTER REMOVAL: 500 ACRES**

### **Contract Time for Completion of Work**

The contractor shall complete all work required through the entire contract limits within the working days specified below after the notice to proceed date.

#### **Mowing Cycle with Litter Removal Cycle:**


**110 Acre Cycle: 7 Working Days**

**170 Acre Cycle: 11 Working Days**

### **Mowing Height & Special Equipment**

- 1) Mowing equipment shall have a minimum adjustable height of 3 to 8 inches.
- 2) No special equipment or equipment restrictions are required for this contract.
- 3) All grass and vegetation shall be cut and trimmed to a height of five (5) inches unless otherwise directed by the engineer.

Special Sign Detail

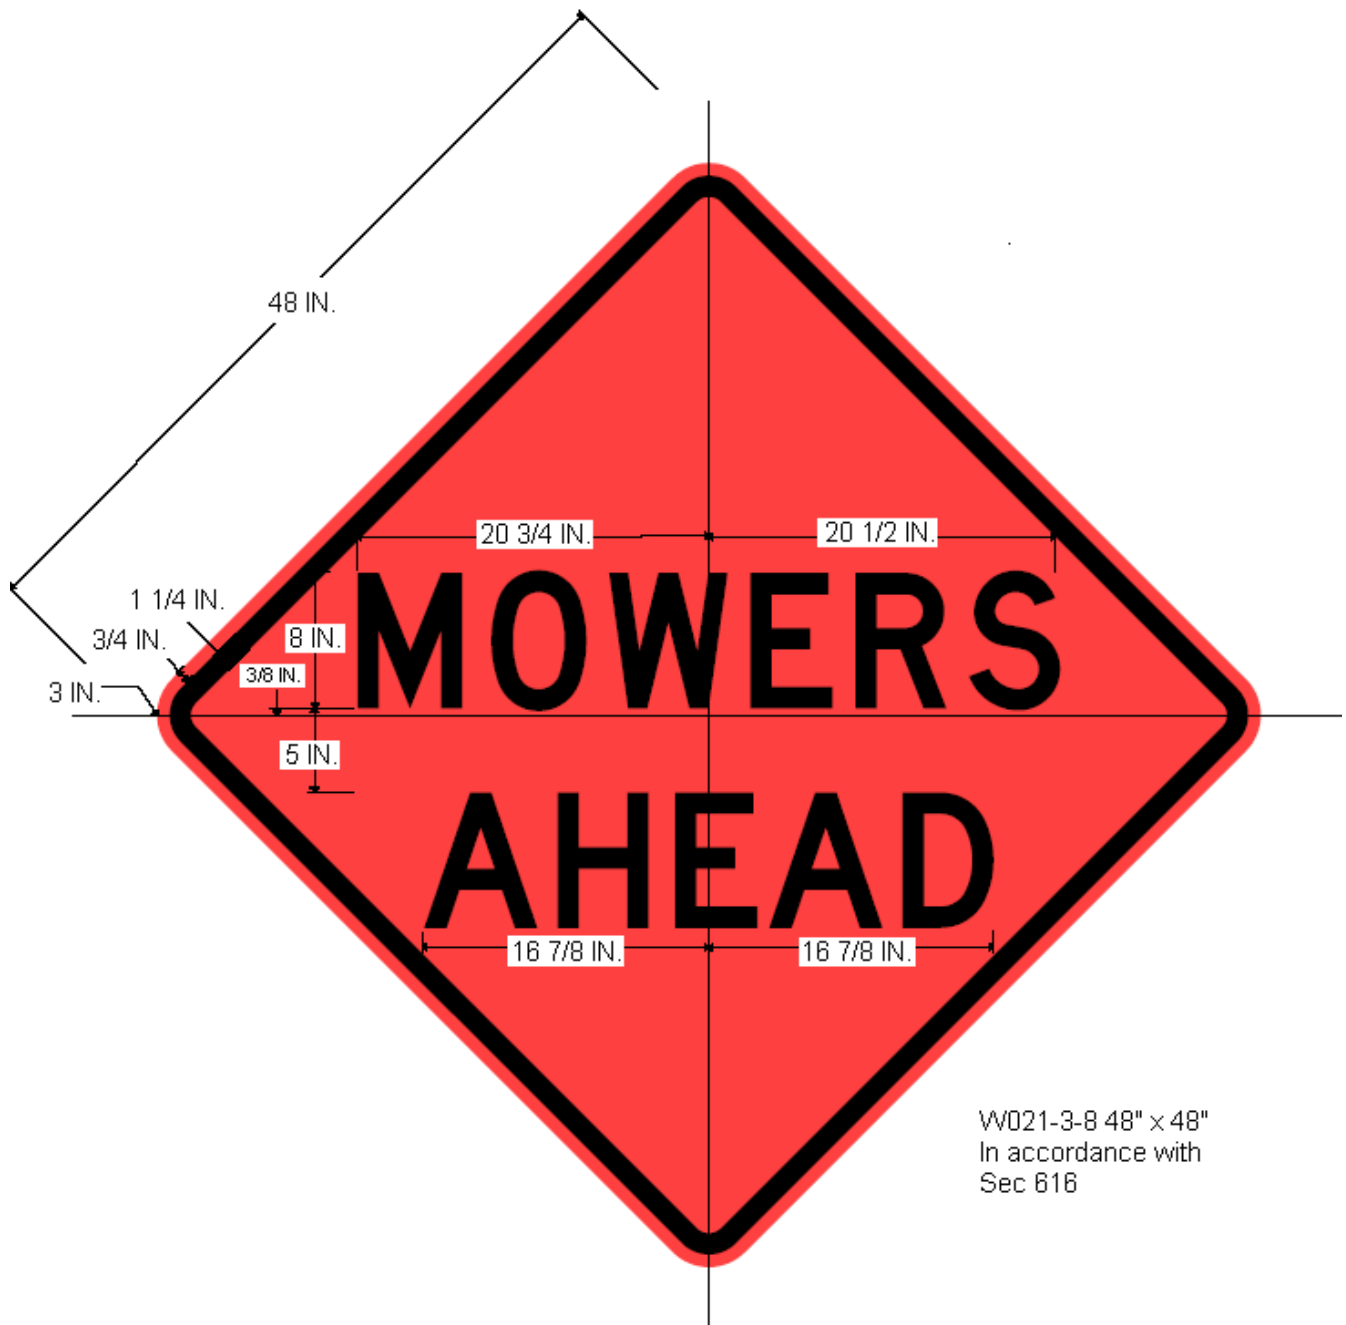

W021-3-8 48" x 48"  
In accordance with  
Sec 616

COLOR

Legend & Border – Black  
Background – Orange

SHEETING

MoDOT Florescent Orange