


Contract Limits and Location Sketch

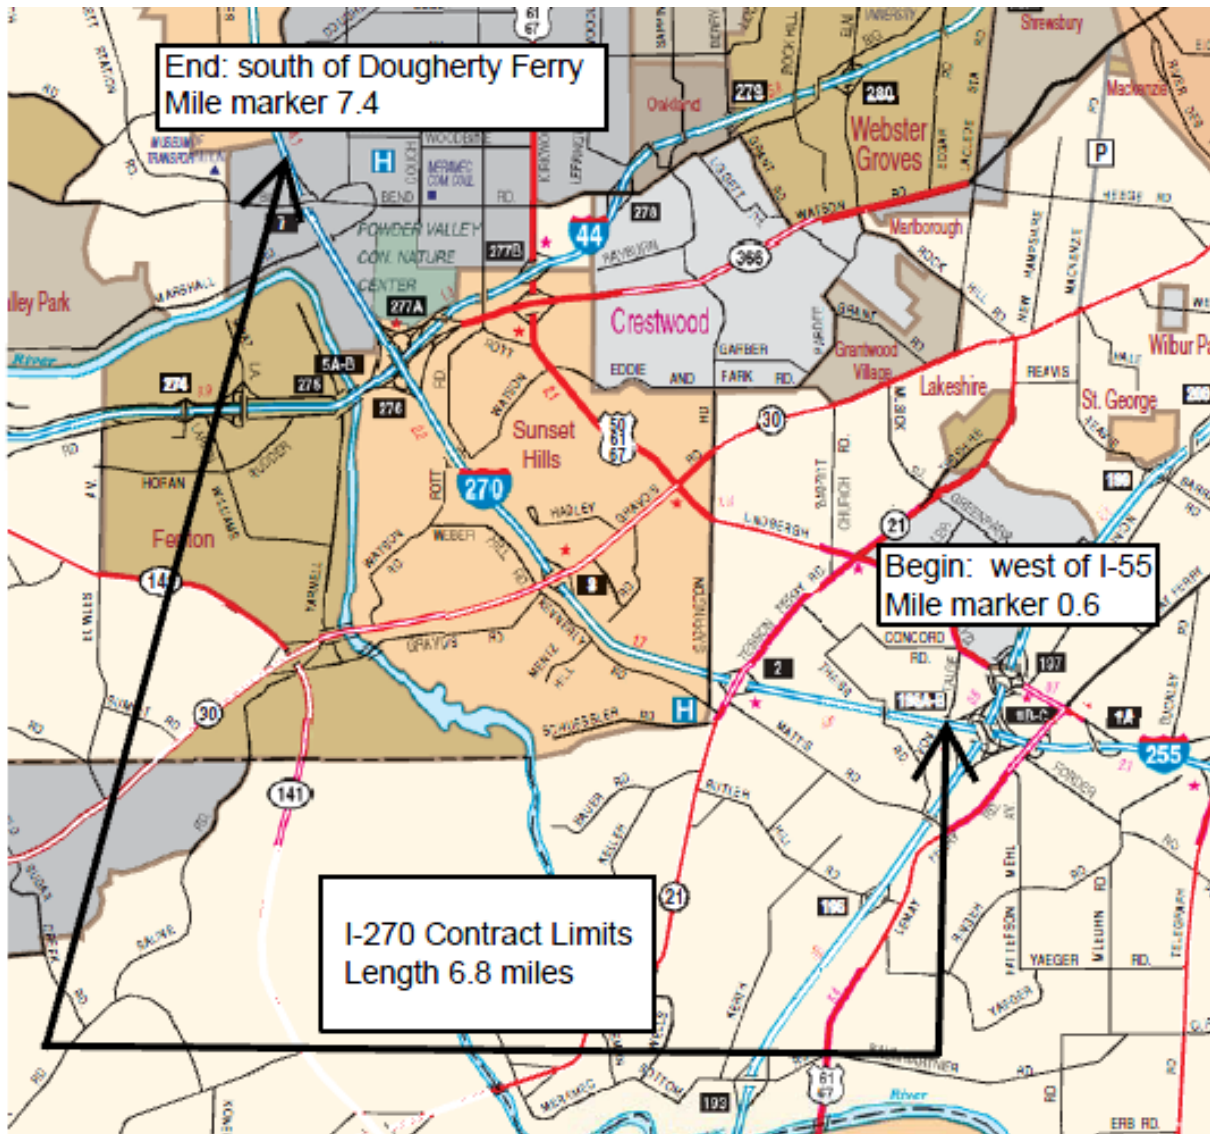

Contract Term and Extension

Initial Contract Term: Commencing [April 1, 2011](#) and shall terminate [November 30, 2011](#)
First Extended Term: Commencing [April 1, 2012](#) and shall terminate [November 30, 2012](#)
Second Extended Term: Commencing [April 1, 2013](#) and shall terminate [November 30, 2013](#)

Contract Limits and Exclusions

The following areas shall be included in the contract limits:

Route 40

Begin Point: South of Dougherty Ferry (MM 7.4)

End Point: Von Talge Overpass, West of I-55 Interchange (MM 0.6)

Notes:

- 1) Includes all areas between and adjacent to ramps at interchanges.
- 2) Includes interchanges and outer roads as shown in pictures 6 through 15 below.

Exclusions: The following are known areas that shall be excluded from the contract limits unless otherwise directed by the engineer:

<u>ROUTE</u>	<u>DIRECTION</u>	<u>CROSS STREET</u>	<u>DESCRIPTION</u>	<u>ACREAGE</u>
I-270	NB	Gravois	Area mowed by adjacent property owner	N/A

TOTAL EXCLUSIONS (APPROXIMATE): [0 ACRES](#)

Mowing Cycles, Litter Removal Cycles, and Preliminary Schedule

[April 1](#) through [June 30](#): [2](#) mowing cycles

[July 1](#) through [November 30](#): [2](#) mowing cycles

TOTAL MOWING & LITTER REMOVAL CYCLES: [4](#)

Mowing Quantities

The quantities shown are the total estimated acres to be mowed during one contract term if all areas are mowed and all mowing cycles are authorized. The total area included in the contract limits has been reduced for excluded areas and/or areas mowed and maintained by others.

The quantities are calculated as follows:

TOTAL AREA PER 1st, 2nd, and 3rd MOWING CYCLES (APPROXIMATE): 30 ACRES
TOTAL AREA PER 4th MOWING CYCLE (APPROXIMATE): 50 ACRES

Total Area in Contract Limits (Acres)	X	Number of Mowing Cycles During Contract Term	=	Total Mowing Quantity During Contract Term (Acres)
30	X	3	=	90
50	X	1	=	50
TOTAL CONTRACT QUANTITY – MOWING:				140 ACRES

Litter Removal Quantities

In accordance with the contract specifications the litter removal area is presumed to be equal to the mowing area.

Total Area in Contract Limits (Acres)	X	Number of Litter Removal Cycles During Contract Term	=	Total Litter Removal Quantity During Contract Term (Acres)
30	X	3	=	90
50	X	1	=	50
TOTAL CONTRACT QUANTITY – LITTER REMOVAL:				140 ACRES

Contract Time for Completion of Work


The contractor shall complete all work required through the entire contract limits within the working days specified below after the notice to proceed date.

Mowing Cycle with Litter Removal Cycle:
30 Acre Cycle: 3 Working Days
50 Acre Cycle: 4 Working Days

Mowing Height & Special Equipment

- 1) Mowing equipment shall have a minimum adjustable height of 3 to 8 inches.
- 2) No special equipment or equipment restrictions are required for this contract.
- 3) All grass and vegetation shall be cut and trimmed to a height of five (5) inches unless otherwise directed by the engineer.

Special Sign Detail

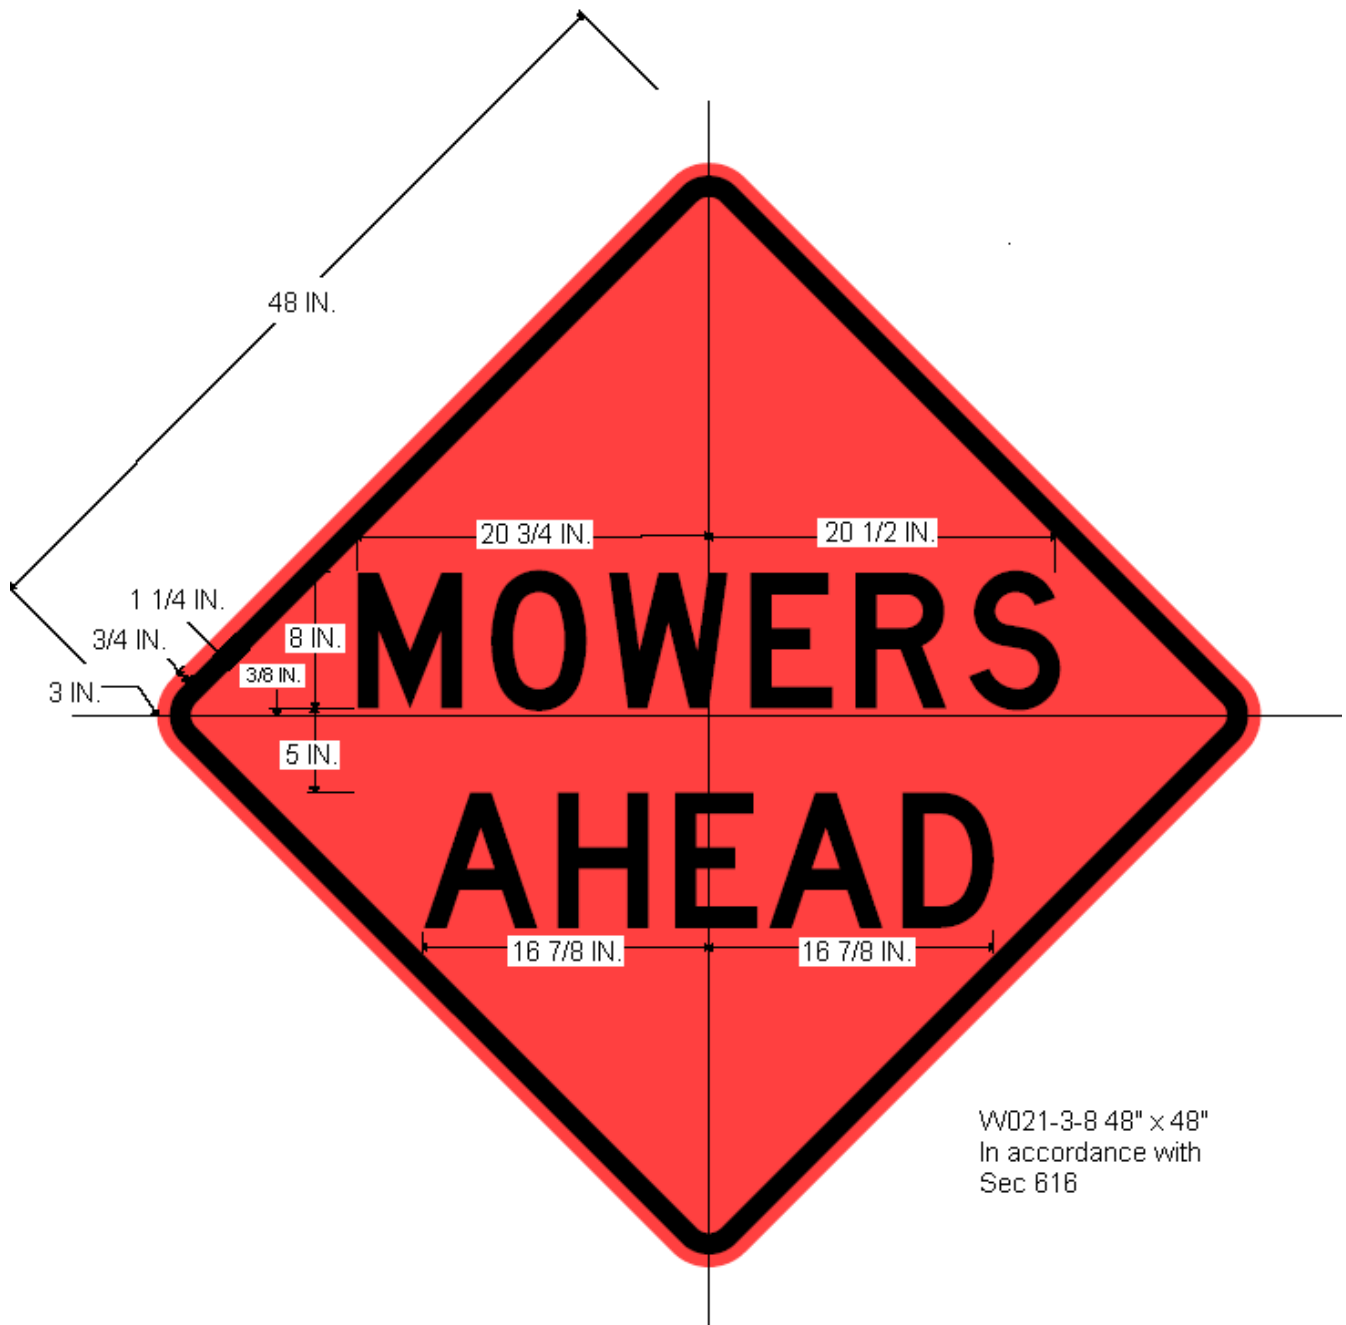

W021-3-8 48" x 48"
In accordance with
Sec 616

COLOR

Legend & Border – Black
Background – Orange

SHEETING

MoDOT Florescent Orange

















EXHIBIT A

Mowing Project #D6-2011-S
Route I-270
St Louis County
Project Detail Sheet 14 of 15

