


Contract Limits and Location Sketch

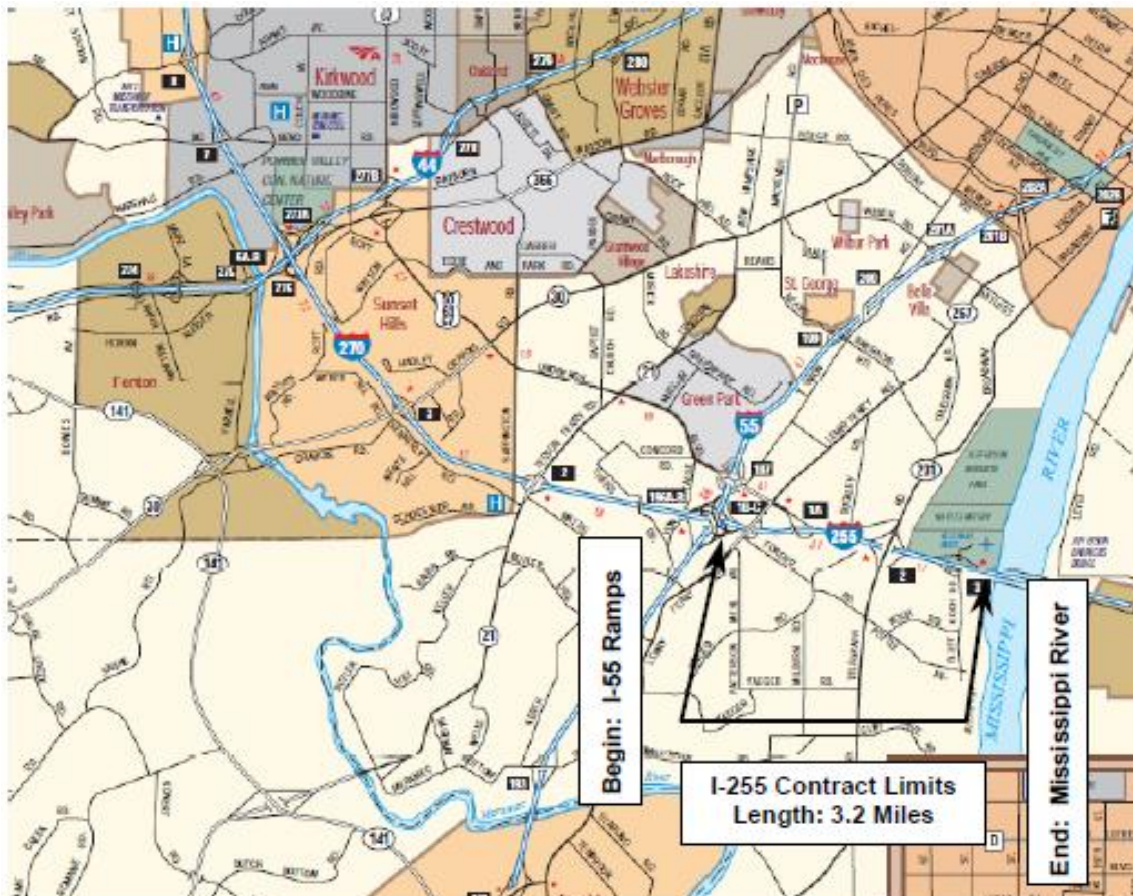

Contract Term and Extension

Initial Contract Term: Commencing [April 1, 2011](#) and shall terminate [November 30, 2011](#)
First Extended Term: Commencing [April 1, 2012](#) and shall terminate [November 30, 2012](#)
Second Extended Term: Commencing [April 1, 2013](#) and shall terminate [November 30, 2013](#)

Contract Limits and Exclusions

The following areas shall be included in the contract limits:

Route I-255 Project Limits

Begin Point: West of Lemay Ferry Rd, (MM 0.4)

End Point: Mississippi River, (MM 3.4)

Note: Includes interchanges and outer roads as shown in pictures 6 through 8 below.

Exclusions: All areas that shall be excluded from the contract limits are shown in the pictures below unless otherwise directed by the engineer.

<u>ROUTE</u>	<u>DIRECTION</u>	<u>CROSS STREET</u>	<u>DESCRIPTION</u>	<u>ACREAGE</u>
TOTAL EXCLUSIONS (APPROXIMATE):				0 ACRES

Mowing Cycles, Litter Removal Cycles, and Preliminary Schedule

April 1 through June 30: 2 mowing cycles

July 1 through November 30: 2 mowing cycles

TOTAL MOWING & LITTER REMOVAL CYCLES: 4

Mowing Quantities

The quantities shown are the total estimated acres to be mowed during one contract term if all areas are mowed and all mowing cycles are authorized. The total area included in the contract limits has been reduced for excluded areas and/or areas mowed and maintained by others.

The quantities are calculated as follows:

TOTAL AREA PER 1st, 2nd, and 3rd MOWING CYCLES (APPROXIMATE): 35 ACRES
TOTAL AREA PER 4th MOWING CYCLE (APPROXIMATE): 80 ACRES

Total Area in Contract Limits (Acres)	X	Number of Mowing Cycles During Contract Term	=	Total Mowing Quantity During Contract Term (Acres)
35	X	3	=	105
80	X	1	=	80

TOTAL CONTRACT QUANTITY – MOWING: 185 ACRES

Litter Removal Quantities

In accordance with the contract specifications the litter removal area is presumed to be equal to the mowing area.

Total Area in Contract Limits (Acres)	X	Number of Litter Removal Cycles During Contract Term	=	Total Litter Removal Quantity During Contract Term (Acres)
35	X	3	=	105
80	X	1	=	80

TOTAL CONTRACT QUANTITY – LITTER REMOVAL: 185 ACRES

Contract Time for Completion of Work

The contractor shall complete all work required through the entire contract limits within the working days specified below after the notice to proceed date.

Mowing Cycle with Litter Removal Cycle:


35 Acre Cycle: 3 Working Days

80 Acre Cycle: 6 Working Days

Mowing Height & Special Equipment

- 1) Mowing equipment shall have a minimum adjustable height of **3 to 8** inches.
- 2) **No special equipment or equipment restrictions are required for this contract.**
- 3) All grass and vegetation shall be cut and trimmed to a height of **five (5)** inches unless otherwise directed by the engineer.

Special Sign Detail

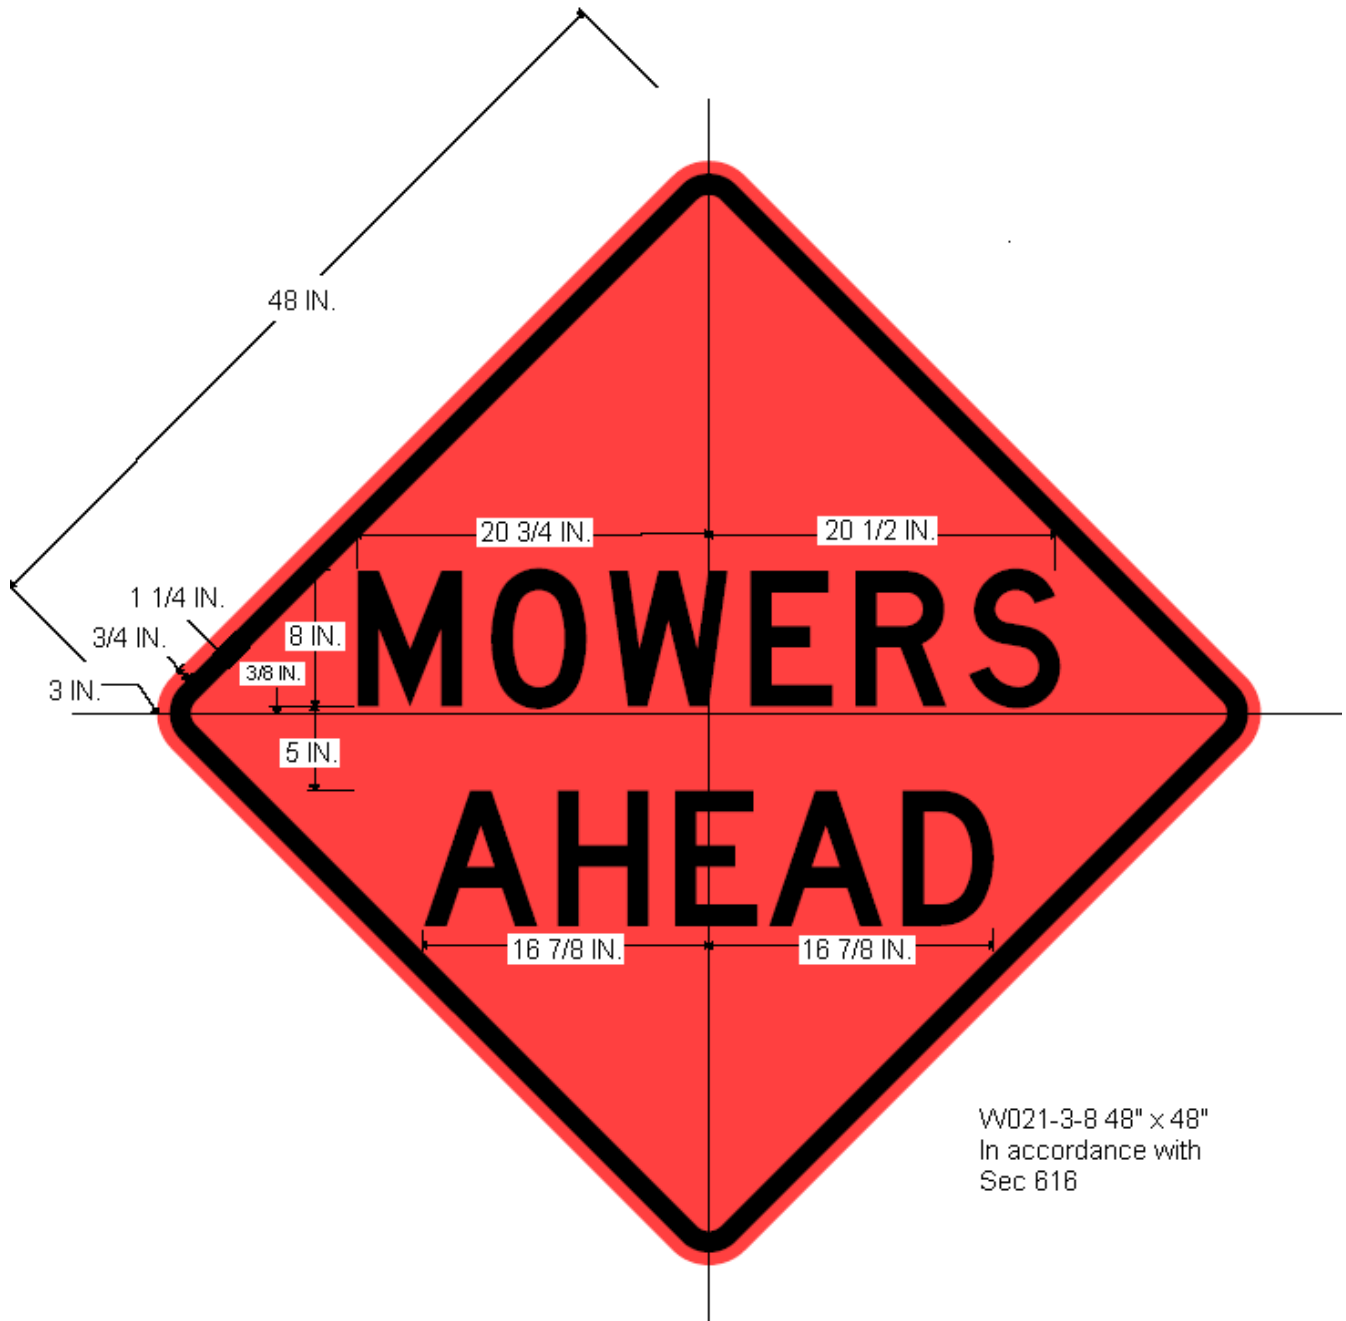

W021-3-8 48" x 48"
In accordance with
Sec 616

COLOR

Legend & Border – Black
Background – Orange

SHEETING

MoDOT Florescent Orange



