


EXHIBIT A

Contract Limits and Location Sketch

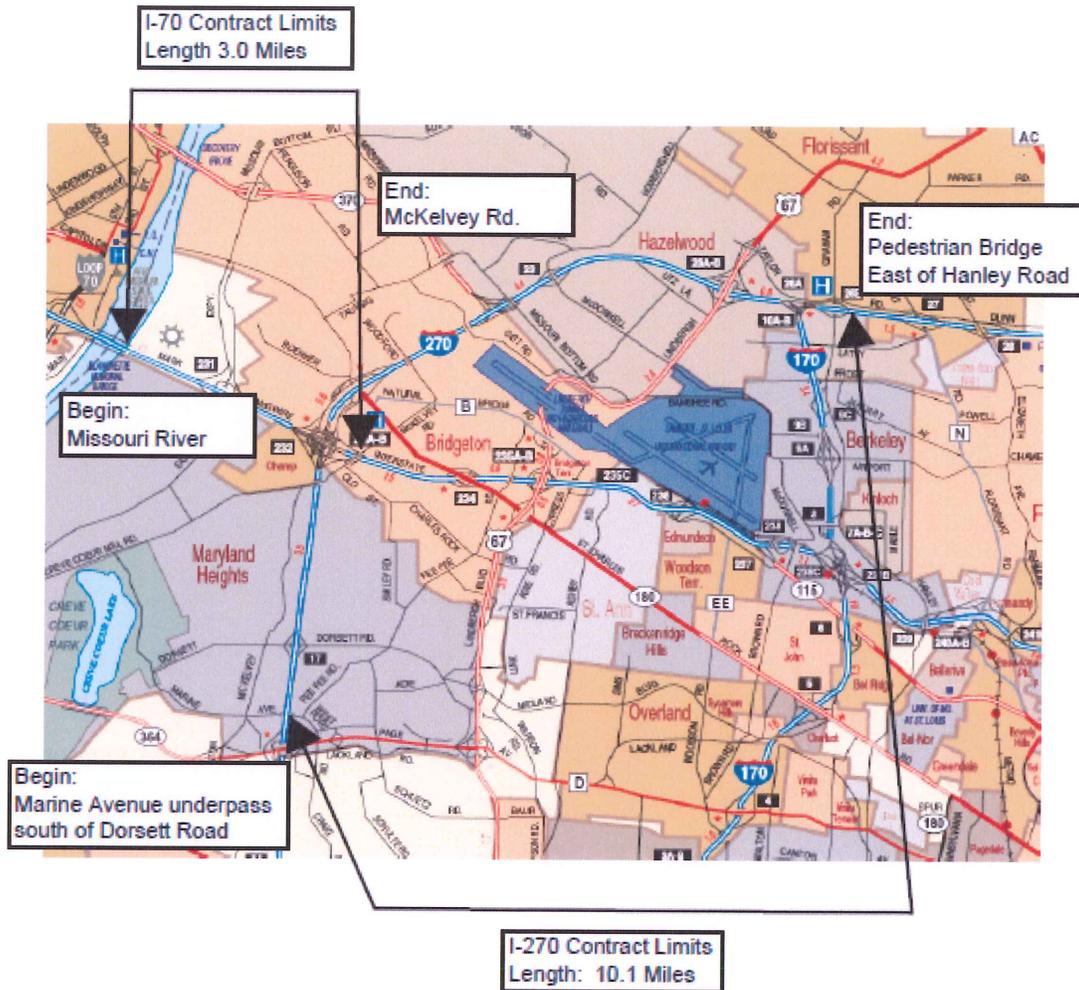

Contract Term and Extension

Initial Contract Term: Commencing **April 1, 2012** and shall terminate **November 30, 2012**
First Extended Term: Commencing **April 1, 2013** and shall terminate **November 30, 2013**
Second Extended Term: Commencing **April 1, 2014** and shall terminate **November 30, 2014**

Contract Limits and Exclusions

The following areas shall be included in the contract limits:

I-70

Begin Point: Missouri River
End Point: McKelvey Road overpass (east of I-270)

Earth City Expressway / I-70 Interchange

Begin Point: State Maintenance Begins / Ends signs north of I-70
End Point: State Maintenance Ends / Begins signs south of I-70

I-70 South Outer Road (Interstate Drive)

Begin Point: McKelvey Road
End Point: End of Roadway east of Earth City Expressway

I-270

Begin Point: Marine Avenue underpass (south of Dorsett Road interchange)
End Point: Pedestrian Bridge located east of Hanley Road (east of I-170 Interchange)

MO 180 / I-270 Interchange

Begin Point: Pennridge Lane (west of I-270)
End Point: Route B (Natural Bridge Road - east of I-270)

MO 370 Interchange

Begin Point: Norfolk Southern Railroad Bridge (1/2 mile west of I-270)
End Point: I-270

US 67 Interchange

Begin Point: Taylor Road bridge (north of I-270)
End Point: Utz Lane (south of I-270)

I-170 Interchange

Begin Point: I-270
End Point: Nyflot Road underpass (1/2 mile south of I-270)

I-270 North Outer Road (Dunn Rd)

Begin Point: Utz Lane
End Point: Taylor Road
Note: 1) Includes both sides of outer road

Notes:

1) Includes all areas between and adjacent to ramps at interchanges.

I-270 Location Specific Details:

15ft.cut on all of main line 3 times per year one before Memorial Day, one before July 4th, and one before Labor Day. One 30ft cut done before Nov. 15th. Trim around all guardrail, guard cable, and signs every cycle. More details about the ramps below.

Exit 17 Dorsett on ramp to 270 north and 270 south off ramp to Dorsett 15 ft cut on left side of ramp, cut to fence on the right side up the ramp taper back to 15 ft when it runs back into the main line for 15ft cut. For 30ft cut entire area on inside of ramp to the interstate, right side cut to fence taper to 30ft when runs back into mainline.

Exit 20A ramp 270 to 70 east 15ft on both sides of ramp for 15ft cycles. 30ft cut down both sides for 30 ft. mow except where elevated

Exit 20B ramp 270 to 70 west 15ft on both sides of ramp except where elevated for 15ft cycle, 30ft on both sides except where elevated for 30ft cycle

Exit 20C St. Charles Rock Rd. 15ft on both sides of ramp for 15ft cycle, 30ft down right side and mow entire area between the left side of ramp and interstate

Exit 22A 270 to 370 west 15 ft cut both sides for 15ft cycles, 30ft cut both sides for 30ft cycle

Exit 22B 270 to Mo. Bottom Rd. 15ft cut both sides for 15ft cycles, 30ft cut both sides for 30ft cycle except where elevated

Exit 23 McDonnell Blvd. 15ft both sides for 15ft cycles, 30ft on right side and entire area between left side and interstate for 30ft cycle

Exit 25 Lindberg 15ft on both sides of on and off ramps for 15ft cycles, 30ft on the right side of outer most ramps cut entire area on the left side of outer most ramps and interstate including clover leafs for 30 ft cycle

Section of interstate between Lindberg and 170 mow to the fence every cycle

Exit 26A 270 to 170 south 15ft both sides except where elevated for 15ft cycles, 30ft both sides except where elevated for 30ft cycle

Exit 26B 270 east to Hanley 15ft both sides of off and on ramps for 15ft cycles, 30ft on right side of off and on ramps and entire area between left side of off and on ramp and interstate for 30ft cycle except where elevated

I-70 Location Specific Details:

Mow entire area in median at the east side of the Missouri River Bridge every cycle

Exit 231 A and B Maryland Heights Expressway 15ft on both sides of all on and off ramps for 15ft cycles, 30 ft on right side of outer most ramps and entire area between left side of ramps and the interstate including the clover leafs

Exit 232 A and B ramps 70 to 270 15 ft on both sides of ramps except where elevated for 15ft cycles, 30 ft on both side of ramps except where elevated

Exclusions: The following are known areas that shall be excluded from the contract limits unless otherwise directed by the engineer:

<u>ROUTE</u>	<u>DIRECTION</u>	<u>CROSS STREET</u>	<u>DESCRIPTION</u>	<u>ACREAGE</u>
I-70/I-270		Various Areas	Wildflower areas	0.50
I-70	WB	Earth City Expressway	West of I-270 gore point to the north half of Earth City Expressway, mile marker 232.6 to 231.6. Includes frontages of Caps, Courtyard, World Omni Financial & Home Savings of America	6.00
I-70	WB	Mo. River	From the "First State Capitol Historic Site" sign to the levee mile marker 230.8 to 230.6. Includes frontages of Dart & Best Buy	3.00
I-270	SB	Gist	Hillside behind guardrail between Gist Rd. and Woodford Way	1.50
I-270	SB	McDonnell Blvd.	From McDonnell Blvd. sign to exit ramp. Degel Truck Center @ mile marker 23.8	3.00
I-270	SB	McDonnell Blvd.	Area west of on-ramp in SW quadrant of interchange in front of Behlman Auto Dealership	3.00
I-270 NOR (Dunn Rd)	WB	Various	Various areas maintained by others	5.00

TOTAL EXCLUSIONS (APPROXIMATE):

22.0 ACRES

Mowing Cycles, Litter Removal Cycles, and Preliminary Schedule

April 1 through June 30: 2 mowing cycles

July 1 through November 30: 2 mowing cycles

TOTAL MOWING & LITTER REMOVAL CYCLES: 4

Mowing Quantities

The quantities shown are the total estimated acres to be mowed during one contract term if all areas are mowed and all mowing cycles are authorized. The total area included in the contract limits has been reduced for excluded areas and/or areas mowed and maintained by others.

The quantities are calculated as follows:

TOTAL AREA PER 15' MOWING CYCLE (APPROXIMATE): 130 ACRES
TOTAL AREA PER 30' MOWING CYCLE (APPROXIMATE): 210 ACRES

Total Area in Contract Limits (Acres)	X	Number of Mowing Cycles During Contract Term	=	Total Mowing Quantity During Contract Term (Acres)
130	X	3	=	390
210	X	1	=	210

TOTAL CONTRACT QUANTITY – MOWING: 600 ACRES

Litter Removal Quantities

In accordance with the contract specifications the litter removal area is presumed to be equal to the mowing area.

Total Area in Contract Limits (Acres)	X	Number of Litter Removal Cycles During Contract Term	=	Total Litter Removal Quantity During Contract Term (Acres)
130	X	3	=	390
210	X	1	=	210
210	X	2*	=	420

*Dates of additional litter pickups to be determined by engineer.

TOTAL CONTRACT QUANTITY – LITTER REMOVAL: 1020 ACRES

Contract Time for Completion of Work

The contractor shall complete all work required through the entire contract limits within the working days specified below after the notice to proceed date.

Mowing Cycle with Litter Removal Cycle:


130 Acre Cycle: 9 Working Days

210 Acre Cycle: 14 Working Days

Mowing Height & Special Equipment

- 1) Mowing equipment shall have a minimum adjustable height of **3 to 8** inches.
- 2) **No special equipment or equipment restrictions are required for this contract.**
- 3) All grass and vegetation shall be cut and trimmed to a height of **five (5)** inches unless otherwise directed by the engineer.

Special Sign Detail

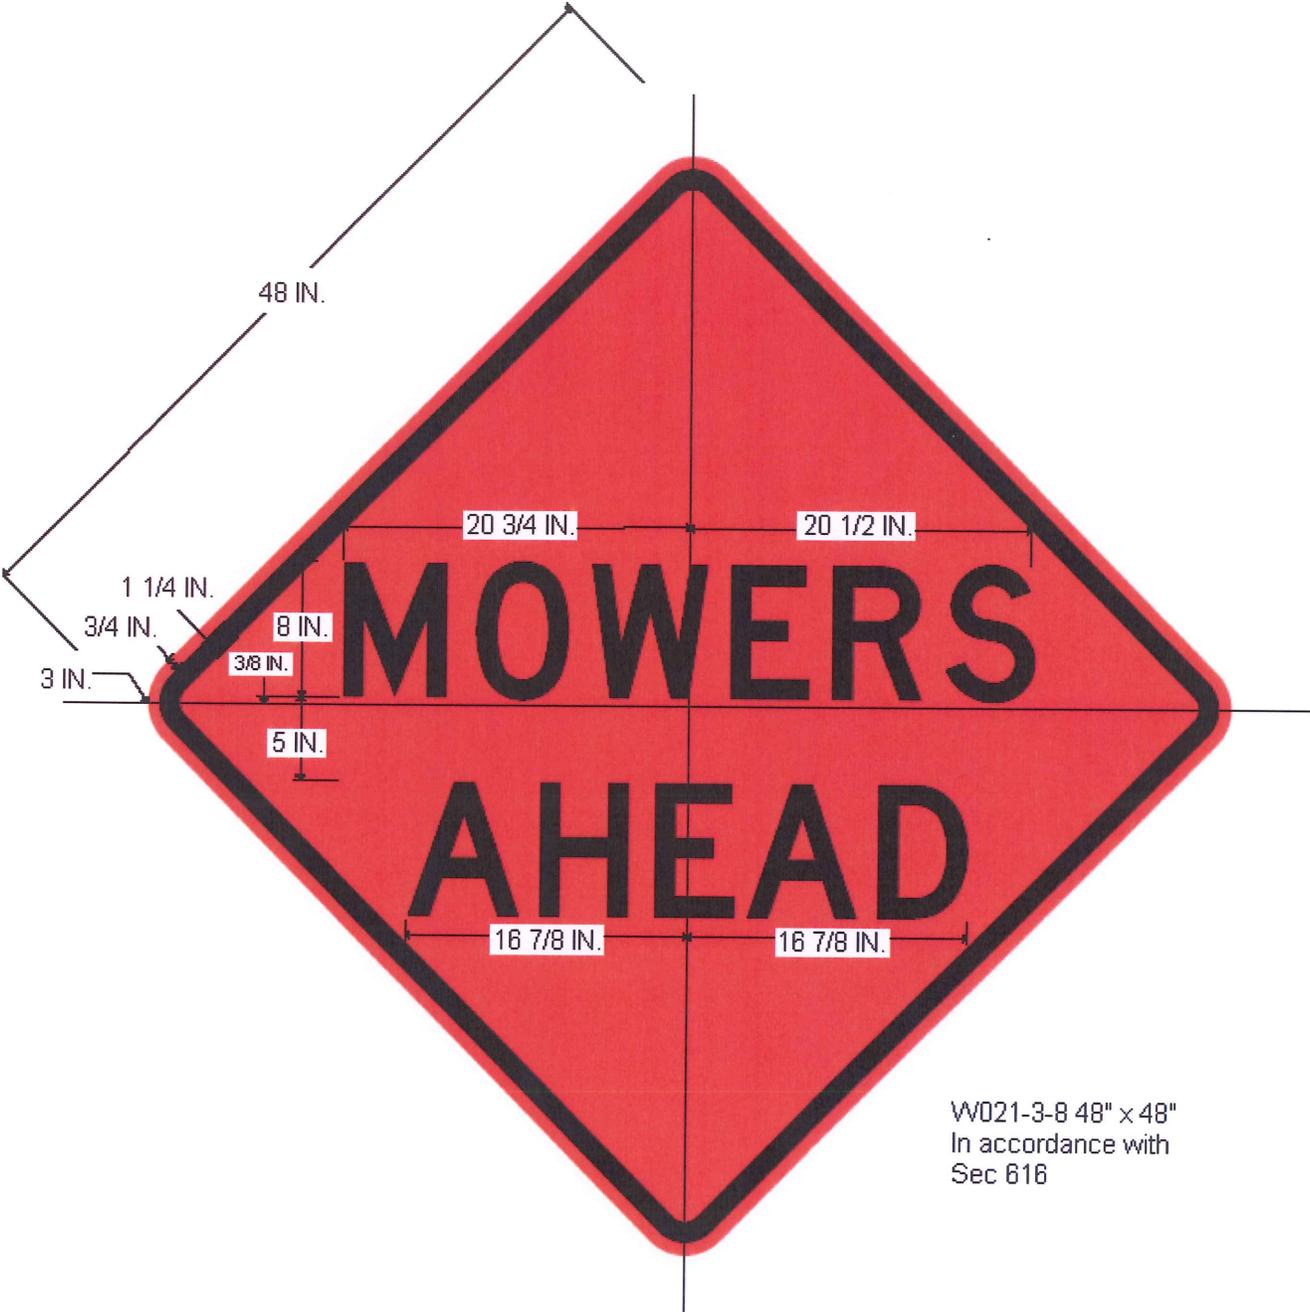

W021-3-8 48" x 48"
In accordance with
Sec 616

COLOR

Legend & Border – Black
Background – Orange

SHEETING

MoDOT Florescent Orange