


EXHIBIT A

Contract Limits and Location Sketch

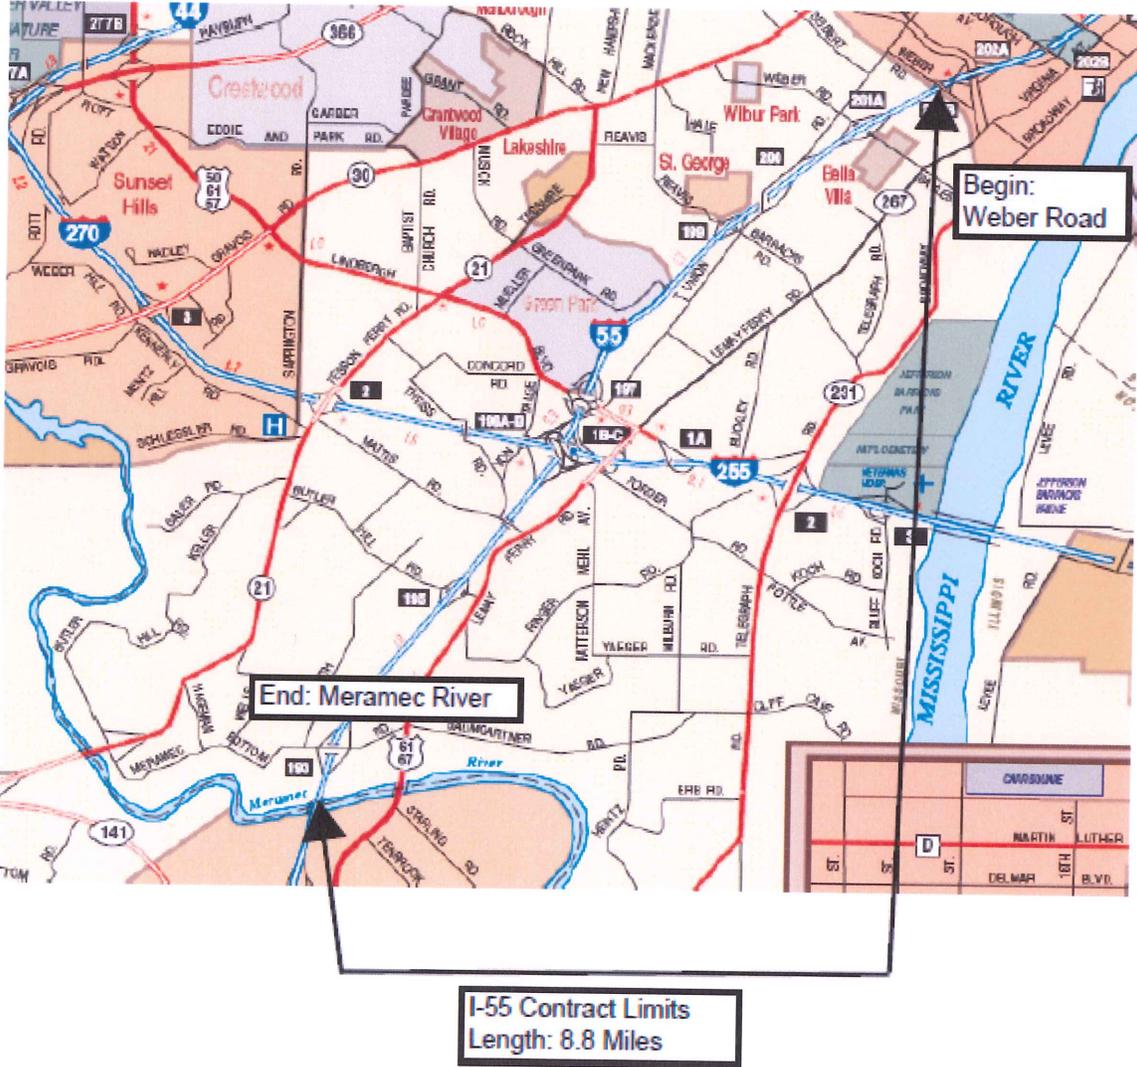

## **Contract Term and Extension**

Initial Contract Term: Commencing **April 1, 2012** and shall terminate **November 30, 2012**  
First Extended Term: Commencing **April 1, 2013** and shall terminate **November 30, 2013**  
Second Extended Term: Commencing **April 1, 2014** and shall terminate **November 30, 2014**

## **Contract Limits and Exclusions**

**The following areas shall be included in the contract limits:**

### **I-55 Project Limits**

Begin Point: Weber Road (St. Louis City Limits)

End Point: Meramec River Bridge

Total Length: 8.8 miles

Note: Includes median north of Lindbergh Blvd (Route 61/67)

### **I-55 / I-270 Interchange**

Begin Point: West of I-55 at Von Talge Road underpass

End Point: East of I-55 at pedestrian overpass just west of Route 61/67 overpass

### **Misc. Interchanges along I-55**

Includes all areas between and adjacent to ramps at interchanges.

### **West Outer Road / Spokane Road**

Begin Point: Reavis Barracks

End Point: South to end state maintenance

Note: Includes all grassy areas around commuter lot.

### **West Outer Road / Little Rock Road**

Begin Point: Butler Hill Road

End Point: North to end state maintenance

### **Notes:**

- 1) Includes all areas between and adjacent to ramps at interchanges.
- 2) Includes interchanges and outer roads as shown in pictures 7 through 16 below.

**Exclusions:** The following are known areas that shall be excluded from the contract limits unless otherwise directed by the engineer:

<u>ROUTE</u>	<u>DIRECTION</u>	<u>CROSS STREET</u>	<u>DESCRIPTION</u>	<u>ACREAGE</u>
I-55	NB & SB	Various	Areas mowed by others	N/A
These are areas mowed by adjoining property owners. They are located at numerous sites throughout the contract limits. Areas will be designated by the engineer.				
I-55	NB & SB	Various	Rock cuts along roadway	N/A
The contractor will not be required to mow the top of rock cuts unless the cut is in an interchange or is adjacent to an outer road. The contractor will be required to mow and trim the area from the edge of the pavement to the ditchline along the bottom of rock cuts.				
<b>TOTAL EXCLUSIONS (APPROXIMATE):</b>				<b>5 ACRES</b>

**Mowing Cycles, Litter Removal Cycles, and Preliminary Schedule**

**April 1 through June 30: 2 mowing cycles**

**July 1 through November 30: 2 mowing cycles**

**TOTAL MOWING & LITTER REMOVAL CYCLES: 4**

### Mowing Quantities

The quantities shown are the total estimated acres to be mowed during one contract term if all areas are mowed and all mowing cycles are authorized. The total area included in the contract limits has been reduced for excluded areas and/or areas mowed and maintained by others.

The quantities are calculated as follows:

T  
**TOTAL AREA PER 1<sup>st</sup>, 2<sup>nd</sup>, and 3<sup>rd</sup> MOWING CYCLES (APPROXIMATE): 45 ACRES**  
**TOTAL AREA PER 4<sup>th</sup> MOWING CYCLE (APPROXIMATE): 75 ACRES**

Total Area in Contract Limits (Acres)	X	Number of Mowing Cycles During Contract Term	=	Total Mowing Quantity During Contract Term (Acres)
<b>45</b>	<b>X</b>	<b>3</b>	<b>=</b>	<b>135</b>
<b>75</b>	<b>X</b>	<b>1</b>	<b>=</b>	<b>75</b>
<b>TOTAL CONTRACT QUANTITY – MOWING:</b>				<b>210 ACRES</b>

### Litter Removal Quantities

In accordance with the contract specifications the litter removal area is presumed to be equal to the mowing area.

Total Area in Contract Limits (Acres)	X	Number of Litter Removal Cycles During Contract Term	=	Total Litter Removal Quantity During Contract Term (Acres)
<b>45</b>	<b>X</b>	<b>3</b>	<b>=</b>	<b>135</b>
<b>75</b>	<b>X</b>	<b>1</b>	<b>=</b>	<b>75</b>
<b>TOTAL CONTRACT QUANTITY – LITTER REMOVAL:</b>				<b>210 ACRES</b>

### **Contract Time for Completion of Work**


The contractor shall complete all work required through the entire contract limits within the working days specified below after the notice to proceed date.

**Mowing Cycle with Litter Removal Cycle:**  
**45 Acre Cycle: 3 Working Days**  
**75 Acre Cycle: 5 Working Days**

### **Mowing Height & Special Equipment**

- 1) Mowing equipment shall have a minimum adjustable height of **3 to 8** inches.
- 2) **No special equipment or equipment restrictions are required for this contract.**
- 3) All grass and vegetation shall be cut and trimmed to a height of **five (5)** inches unless otherwise directed by the engineer.
- 3) In rocky areas, all grass and vegetation shall be cut and trimmed to a height of **six (6)** inches as directed by the engineer.

Special Sign Detail

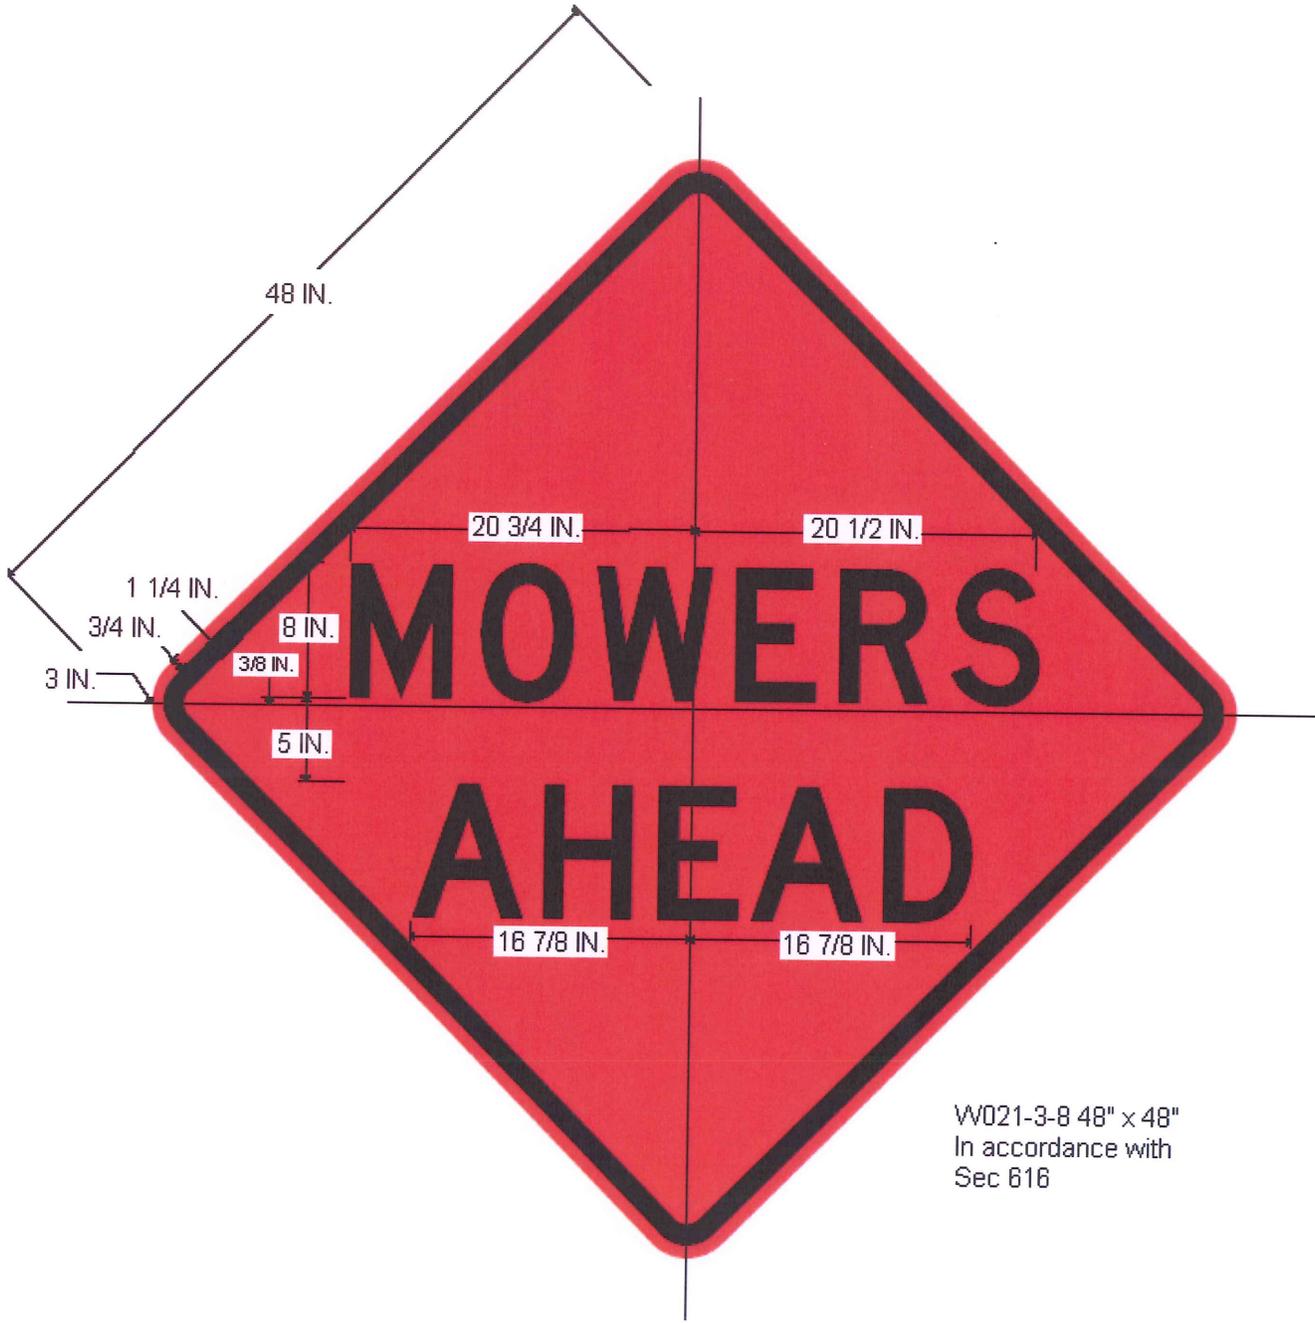

W021-3-8 48" x 48"  
In accordance with  
Sec 616

COLOR

Legend & Border – Black  
Background – Orange

SHEETING

MoDOT Fluorescent Orange



### I-55 St. Louis City limits (Weber Rd) to MO-M








Mow 15' on 1st, 2nd and 3rd mowing cycles (1.024 ac) and 30' on final mowing cycle (2.048 ac)

Mow 15' on 1st, 2nd and 3rd mowing cycles (1.805 ac) and 30' on final mowing cycle (3.610 ac)


Mow all in quadrants every mowing cycle (1.48 ac)

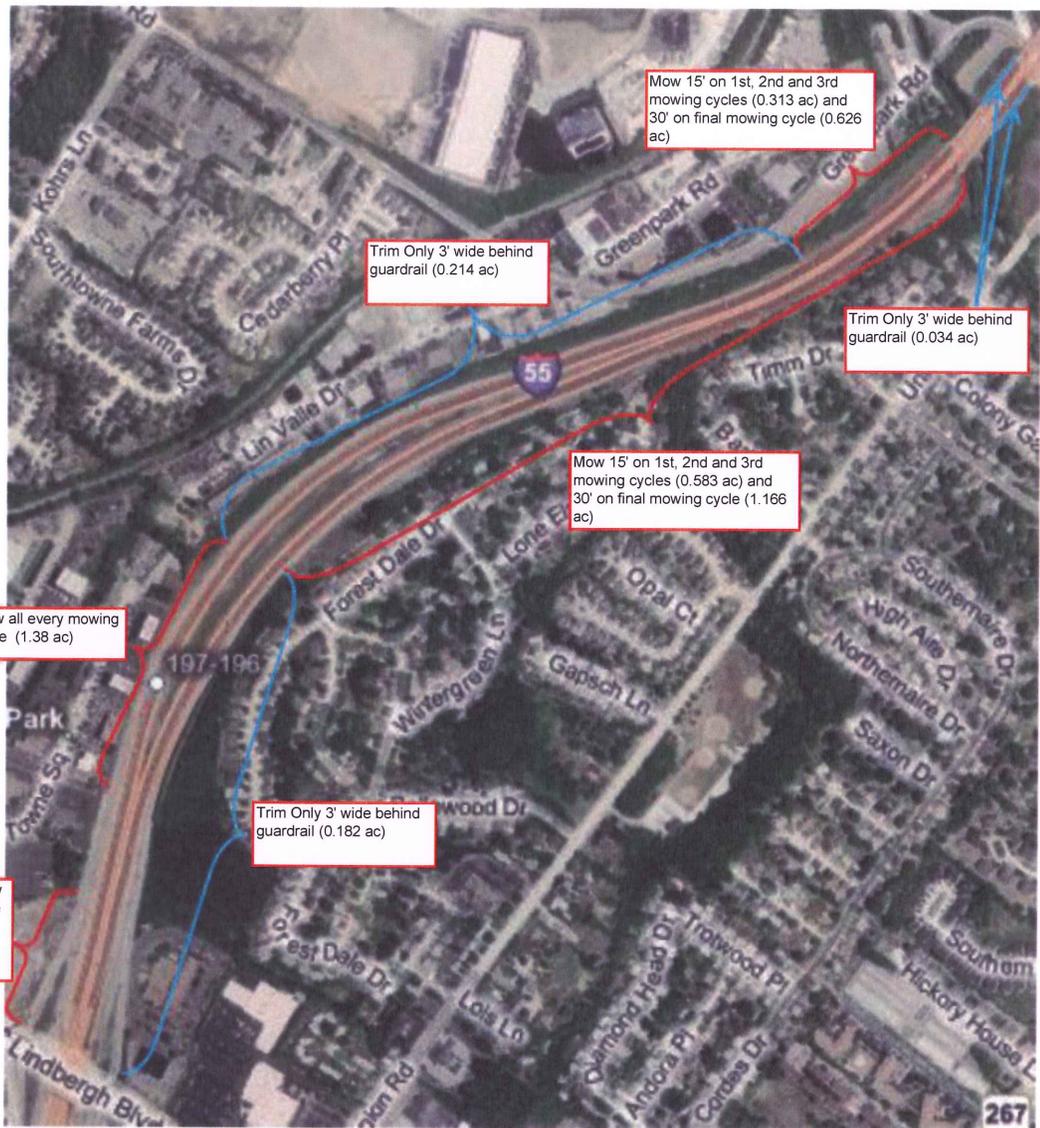





Mowing Project #SL\_2012\_C  
Route I-55  
St. Louis County  
Project Detail Sheet 12 of 16

EXHIBIT A  
6 of 10

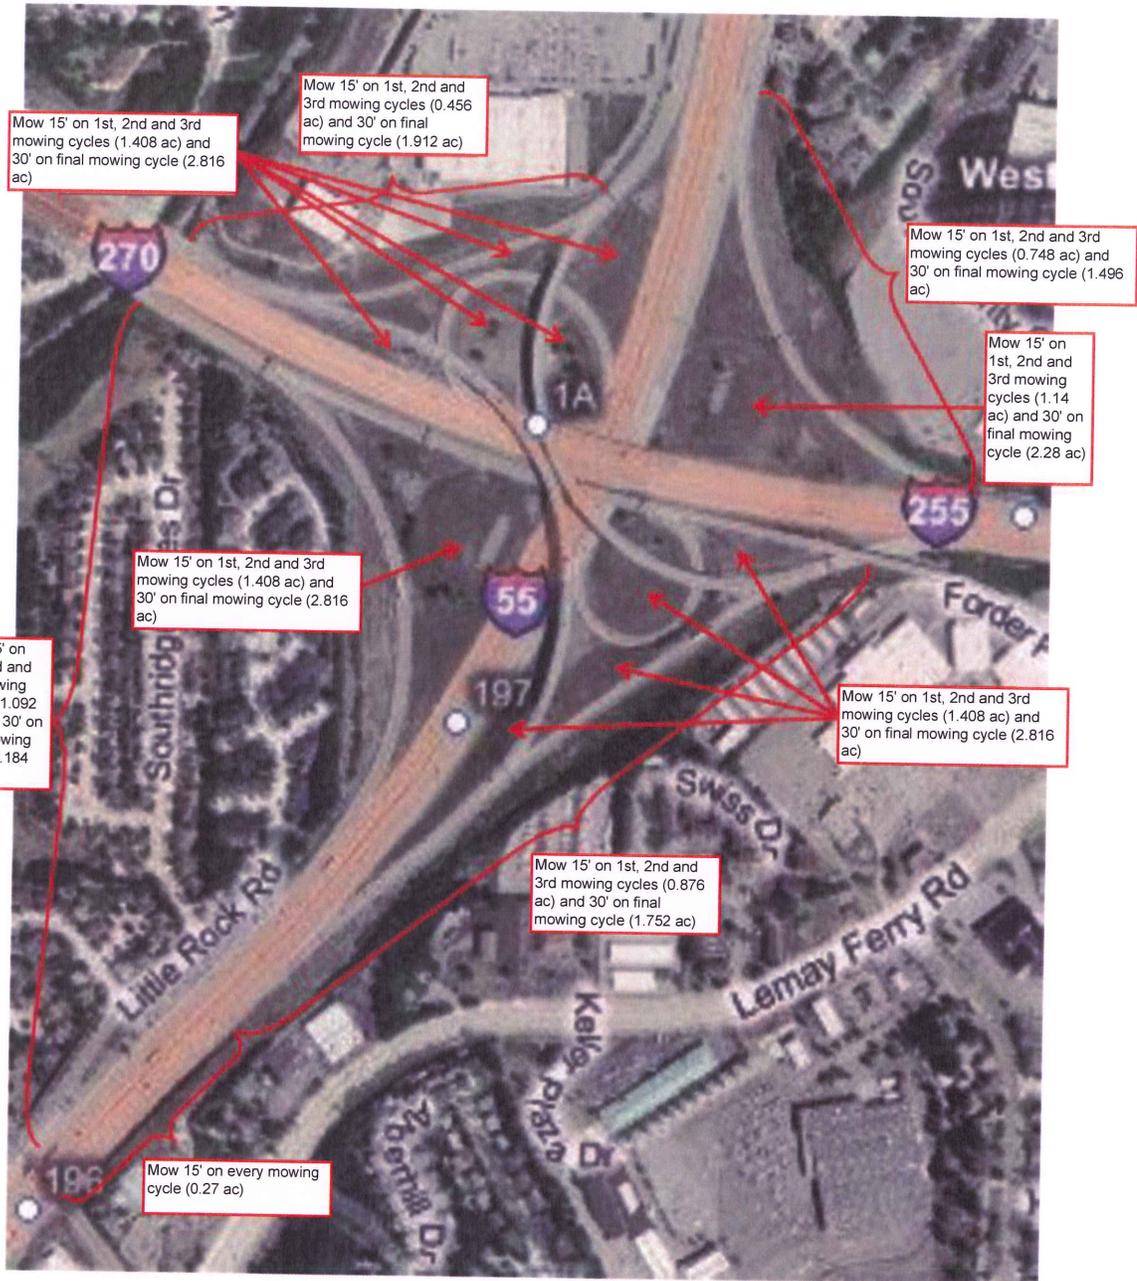

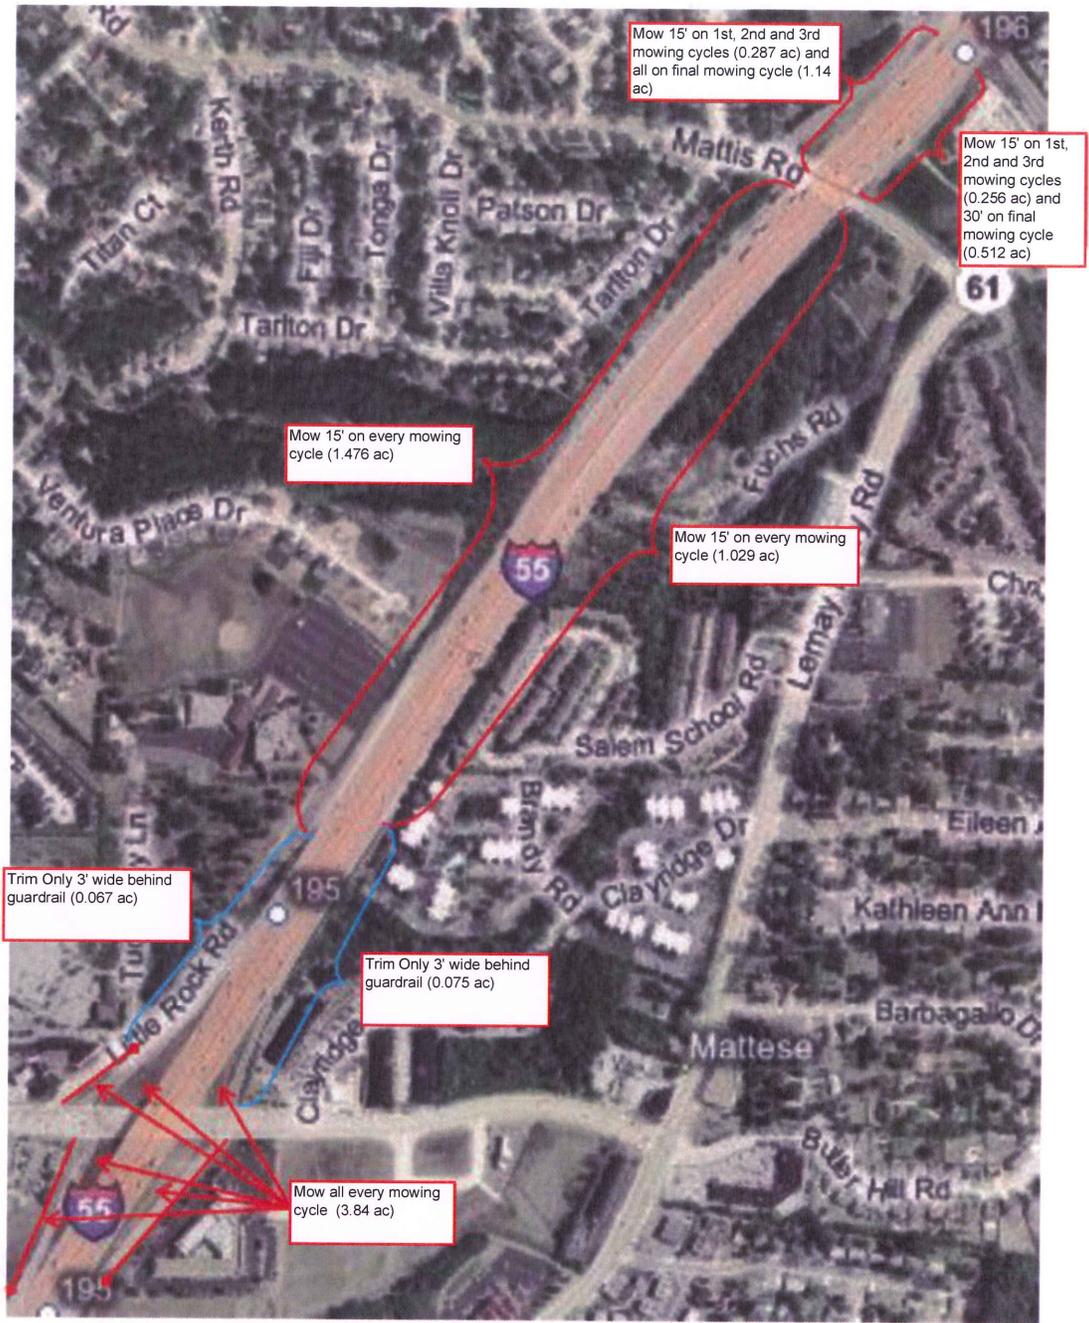

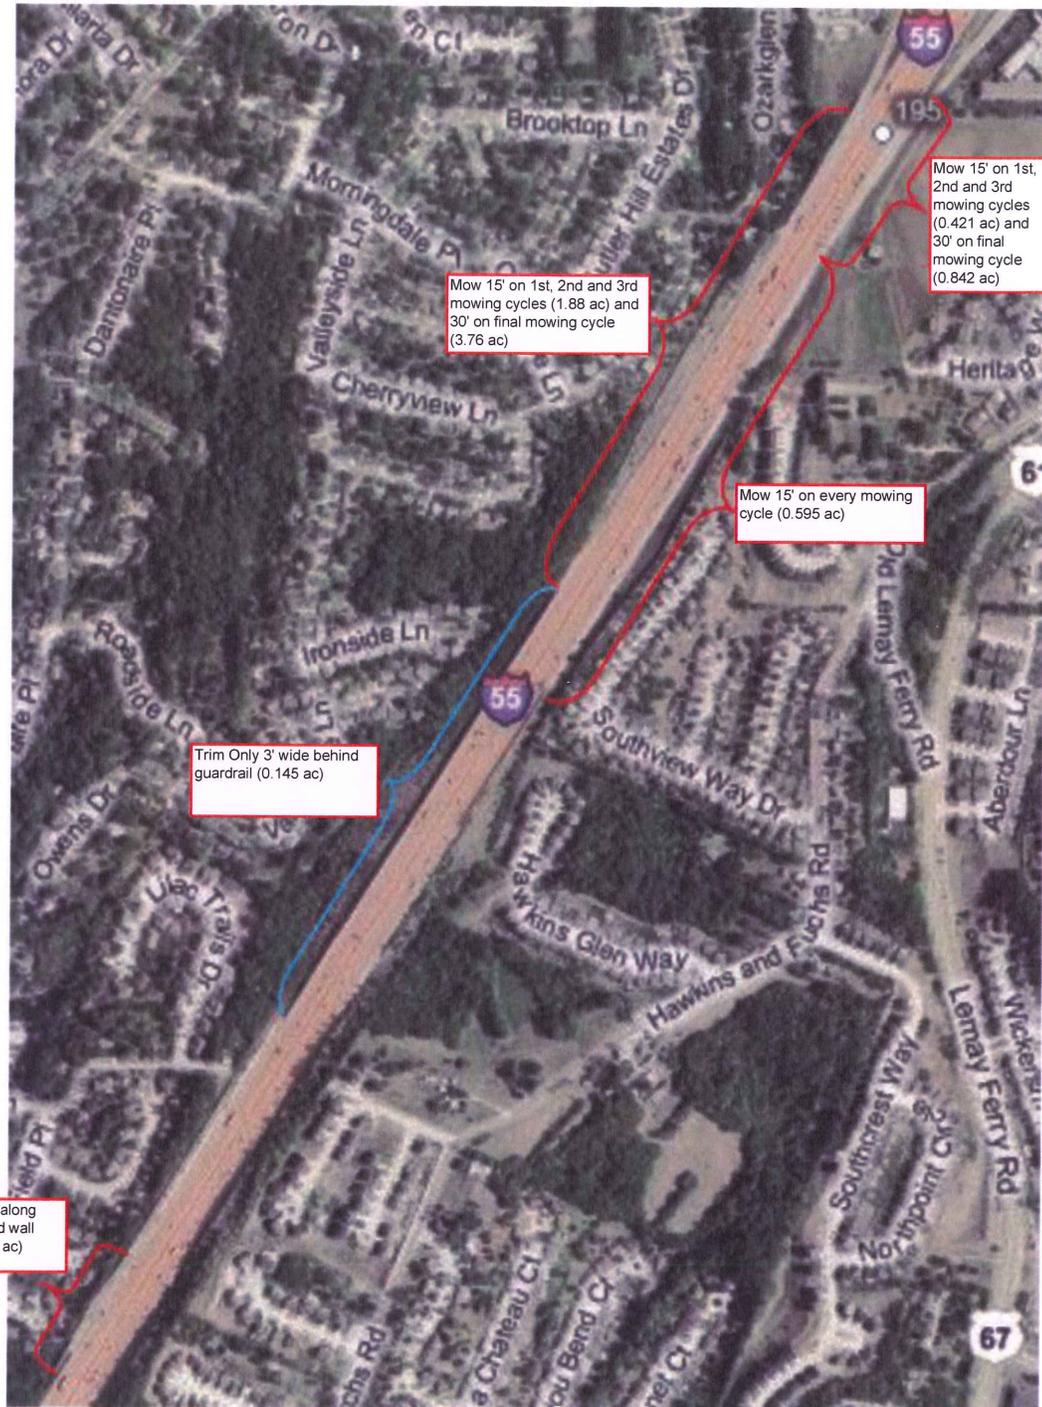

Mow 15' on 1st, 2nd and 3rd mowing cycles (0.421 ac) and 30' on final mowing cycle (0.842 ac)

Mow 15' on 1st, 2nd and 3rd mowing cycles (1.88 ac) and 30' on final mowing cycle (3.76 ac)

Mow 15' on every mowing cycle (0.595 ac)

Trim Only 3' wide behind guardrail (0.145 ac)

Mow along sound wall (0.46 ac)



Mowing Project #SL\_2012\_C  
Route I-55  
St. Louis County  
Project Detail Sheet 16 of 16

EXHIBIT A  
10 of 10