


EXHIBIT A

Contract Limits and Location Sketch

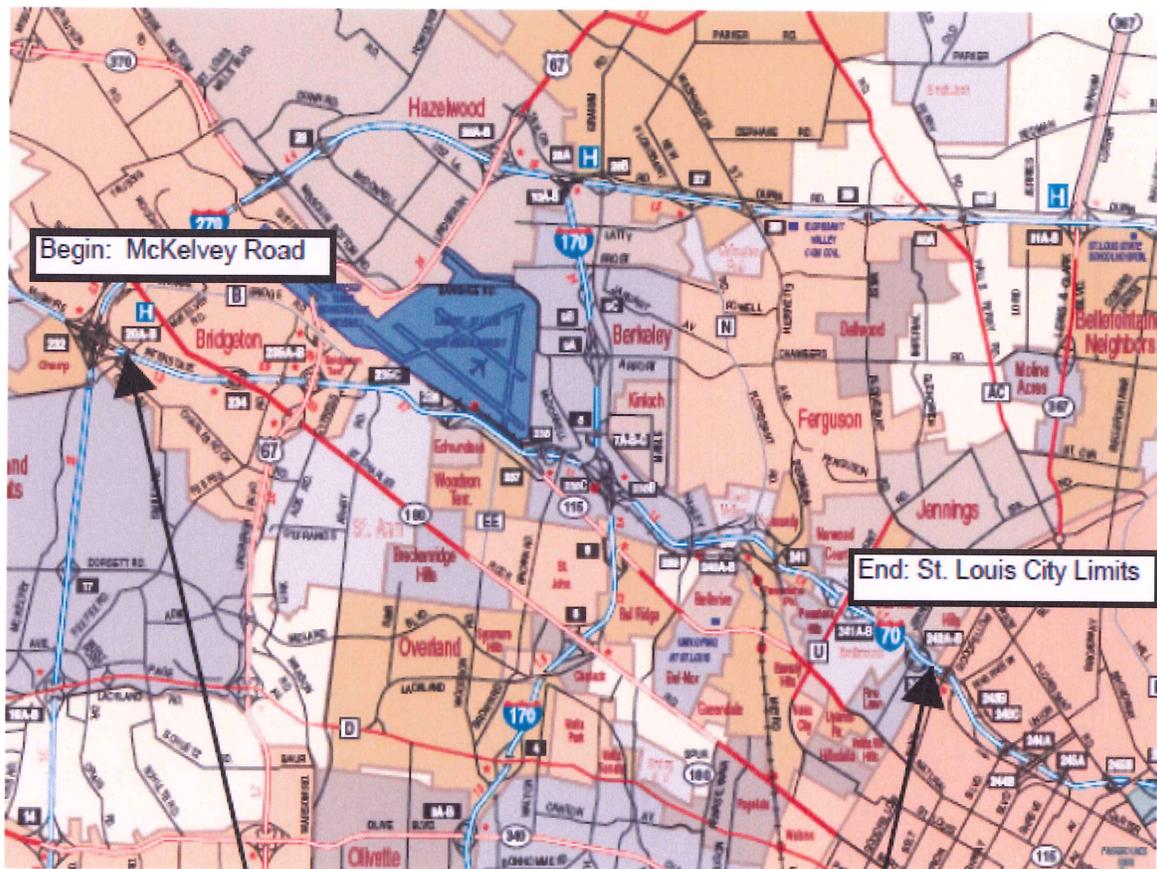

I-70 Contract Limits
Length: 10 Miles

Contract Term and Extension

Initial Contract Term: Commencing April 1, 2012 and shall terminate November 30, 2012
First Extended Term: Commencing April 1, 2013 and shall terminate November 30, 2013
Second Extended Term: Commencing April 1, 2014 and shall terminate November 30, 2014

Contract Limits and Exclusions

The following areas shall be included in the contract limits:

I-70

Begin Point: McKelvey Road overpass (east of I-270 interchange)
End Point: McDonnell Blvd. overpass (west of I-170 interchange)

Begin Point: Springdale Avenue underpass (east of I-170)
End Point: St. Louis City Limits (west of the Goodfellow interchange)

MO 180 / I-70 Interchange

Begin Point: 100 feet north of westbound I-70 off ramp
End Point: Mark Twain Lane, south of I-70

US 67 / I-70 Interchange

Begin Point: Long Road, north of I-70
End Point: Lone Eagle Drive, south of I-70

Notes:

- 1) Includes all areas between and adjacent to ramps at interchanges.
- 2) Limits extend to fence line located between I-70 and the North and South Outer Roads.

Exclusions: The following are known areas that shall be excluded from the contract limits unless otherwise directed by the engineer:

<u>ROUTE</u>	<u>DIRECTION</u>	<u>CROSS STREET</u>	<u>DESCRIPTION</u>	<u>ACREAGE</u>
I-70	EB	Lindbergh	SB Route 67 ramp in front of Raddison Hotel	2.5
I-70	WB	Airflight	Airport frontage	2.0
I-70		Florissant Road (Rte N) Interchange	Interchange maintained by others	2.5

TOTAL EXCLUSIONS (APPROXIMATE): 7.0 ACRES

Mowing Cycles, Litter Removal Cycles, and Preliminary Schedule

April 1 through November 30 **4 mowing cycles**

TOTAL MOWING & LITTER REMOVAL CYCLES: 4

Mowing Quantities

The quantities shown are the total estimated acres to be mowed during one contract term if all areas are mowed and all mowing cycles are authorized. The total area included in the contract limits has been reduced for excluded areas and/or areas mowed and maintained by others.

The quantities are calculated as follows:

TOTAL AREA PER MOWING CYCLE (APPROXIMATE): 230 ACRES

Total Area in Contract Limits (Acres)	X	Number of Mowing Cycles During Contract Term	=	Total Mowing Quantity During Contract Term (Acres)
230	X	4	=	920

TOTAL CONTRACT QUANTITY – MOWING: 920 ACRES

Litter Removal Quantities

In accordance with the contract specifications the litter removal area is presumed to be equal to the accepted mowing area.

TOTAL LITTER REMOVAL QUANTITY – CONTRACTOR PERFORMED: 920 ACRES

Contract Time for Completion of Work


The contractor shall complete all work required for each mowing cycle through the entire contract limits within the working days specified below after the notice to proceed date.

14 Working Days

Mowing Height & Special Equipment

- 1) Mowing equipment shall have a minimum adjustable height of **3 to 8** inches.
- 2) **No special equipment or equipment restrictions are required for this contract.**
- 3) All grass and vegetation shall be cut and trimmed to a height of **five (5)** inches unless otherwise directed by the engineer.

Special Sign Detail

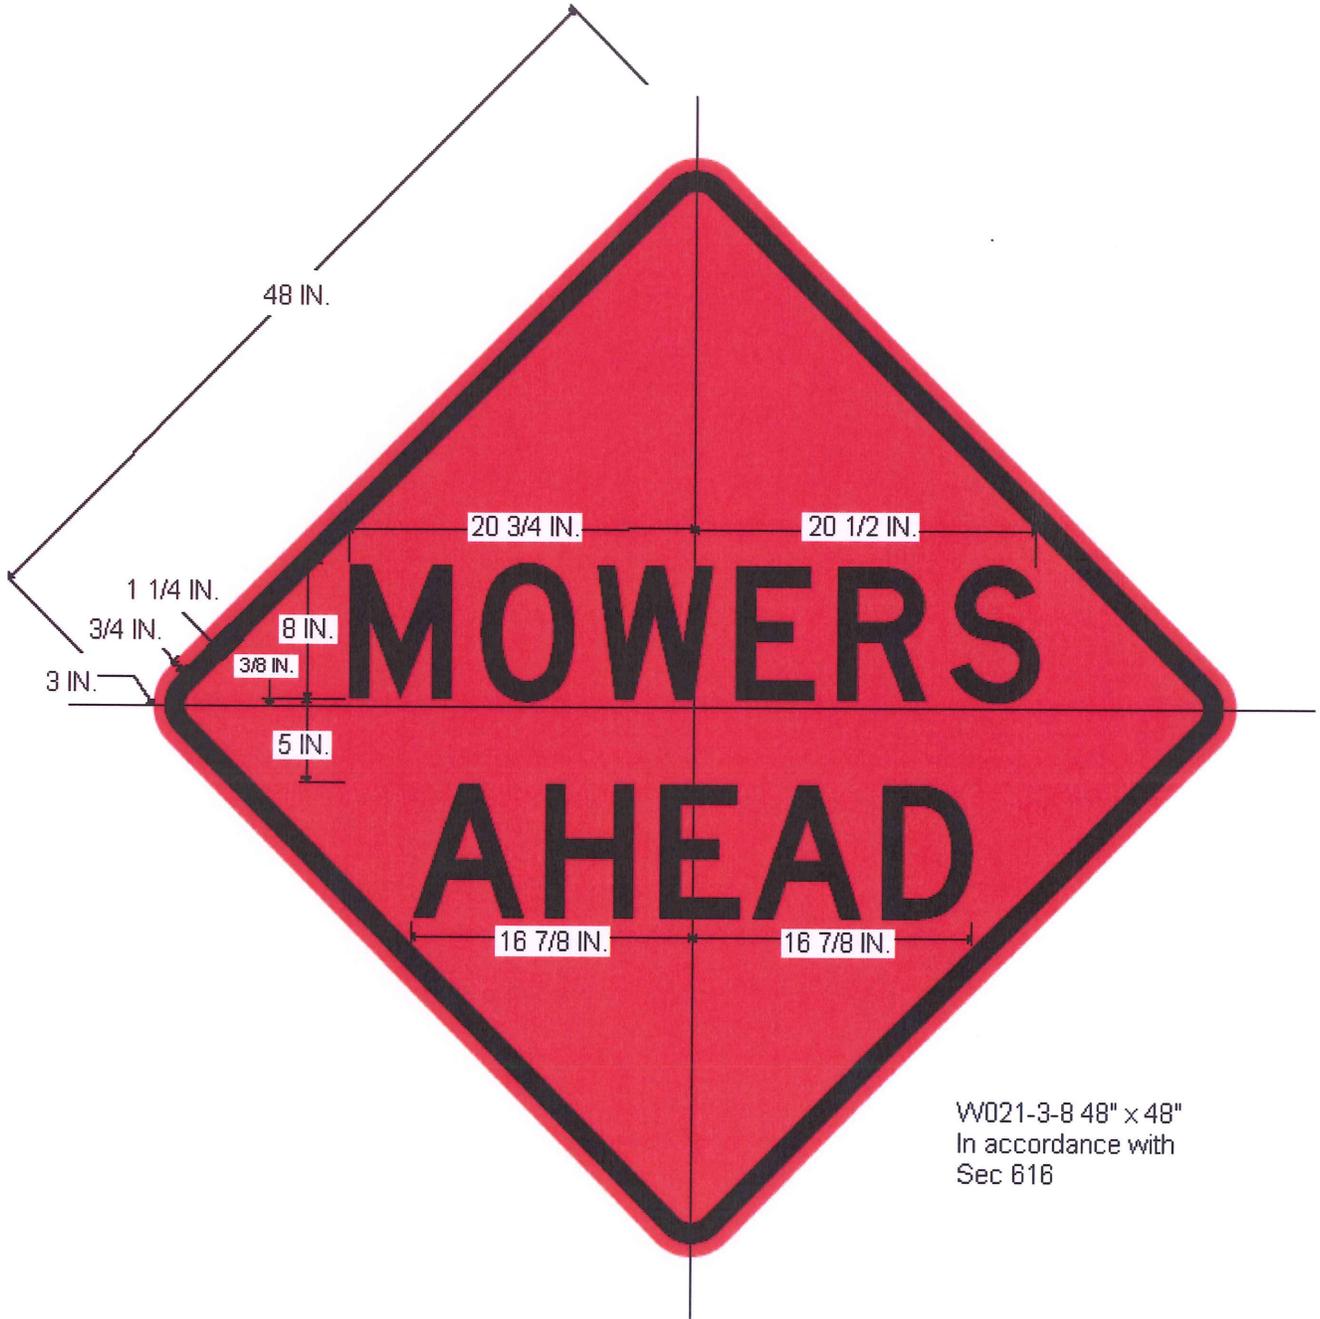

W021-3-8 48" x 48"
In accordance with
Sec 616

COLOR

Legend & Border – Black
Background – Orange

SHEETING

MoDOT Florescent Orange