



ORDER CONFIRMATION -- TRAILERS
LANDOLL CORPORATION
 1900 NORTH STREET
 MARYSVILLE, KS 66508
 PH: 800-428-5855 FAX: 888-293-6779
 www.landoll.com



TRAILER #: BID REQUEST 3-121129TV

DATE: 11/26/2012

SOLD TO: MISSOURI DEPARTMENT OF TRANSPORTATION
 ADDRESS: PO BOX 270 1320 CREEK TRAIL DRIVE
 CITY: JEFFERSON CITY ST: MO ZIP: 65102
 CONTACT: TOM VEASMAN CELL:
 PH: 573-522-4404 FAX: 573-526-1218

SHIP TO:
 ADDRESS:
 CITY:
 CONTACT:
 PH:
 E-MAIL

E-MAIL tom.veasman@modot.mo.gov

MODEL YEAR:	2013	ENGINEERED BY:	DATE:	2013 - PRICE -
STD MODEL:	345E-31	LENGTH:	35'	\$47,155.00
HITCH:	4' HITCH (add to overall length)			STD
WINCH:	12,000 # WINCH	LOCATION:	FRONT DECK MOUNT	\$3,355.00
DECK TYPE:	APITONG WOOD DECKING			STD
WIDTH:	102" WIDTH			STD
SUSPENSION:	Spring Suspension Transpro Mono Leaf - in Lieu of Air Ride Std.			STD
WHEEL RIMS:	HUB PILOT WHEEL ASSEMBLY W/OUTBOARD DRUMS			STD
TIRES:	235/75R 17.5 DOUBLE COIN LRH			STD
FEATURES:	ADDITIONAL CROSSMEMBERS, LED LIGHT PKG, CENTRALIZED GREASE			STD
OPTIONS:	Rub/Chain Rail-Web Mounted With Stake Pockets on 2' centers			\$1,240.00

VIN #: 1LH345

PAINT COLOR: POWDER COAT BLACK

CODE: 128000

SALESMAN:	
CUSTOMER #:	
CUSTOMER P.O. #:	
ESTIMATED COMP.:	
ENG REQUEST :	

F.O.B.:	MARYSVILLE, KS.
F.E.T. EXEMPTION #:	
TERMS:	

TOTAL PRICE:	\$51,750.00
DISCOUNT:	-\$10,867.50
MUNI DISCOUNT:	-\$2,044.13
SUBTOTAL:	\$38,838.37
F.E.T.:	EXEMPT
KS TIRE TAX:	N/A
FREIGHT:	\$750.00
TOTAL:	\$39,588.37
DOWNPAYMENT:	
BALANCE DUE:	\$39,588.37

F.E.T. CALCULATION:	
SALE PRICE:	\$38,838.37
X 12%:	\$4,660.60
TIRE DEDUCT:	-\$88.80
F.E.T.:	\$4,571.80

CUSTOMER SIGNATURE: _____

AUTHORIZED SIGNATURE: GARY DWERLKOTTE

NO SIGNATURE REQUIRED FOR CREDIT ADVANCEMENT APPROVAL

[Return to Landoll Transportation](#)

Choose Trailer Type

Then Choose Model

Updated November 26, 2012


Trailers - Hydraulic



LANDOLL 345E



Model	Capacity*	Deck	Axles	Tires & Ply Rating
345E-31	20 Ton	102	2	(8) 235/75R 17.5 LRH

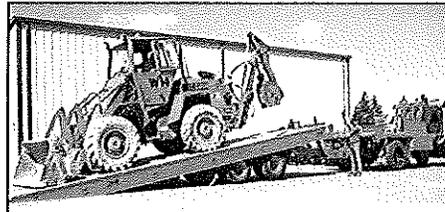

[View Photo Gallery](#)

Photos may show optional equipment


STANDARD EQUIPMENT

*Capacity:	40,000 Lbs.	Air/Electrical	7 Way Receptacle
Deck Rating:	30,000 Lbs. In 10 Foot	Hydraulic Hook Up:	Quick Couplers 2500 PSI/17 GPM
Estimated Base Weight:	12,500 Lbs. (31')+ / - 3%	Lights:	Grote "SuperNova" LED-10 year warranty
Main Frame:	Fabricated 80,000 PSI Yield Perimeter Beams-Fabricated Inner Beams 80,000 PSI Web and Top Flange, 100,000 PSI Bottom Flange	Finish:	Steel Grit Shot Blast to Bright Metal
Crossmembers:	3"&4" Jr. I-Beams Alternating on 8" Centers	Powder Coat Color:	White/Black/Yellow/Blue/Red/Green
Parking Stands:	Pin Drop	Decals:	Hi-Visibility Reflective Package
Tires:	235/75R 17.5 LRH Double Coin	Tie Downs:	Double Key Hole Chain Slots & Stake Pockets on 24" Centers
Rims	17.5 x 6.75 Tubeless	Wiring Harness:	Grote "Ultra-Blue Seal"-7 year warranty
Wheels:	Hub Pilot/Steel Outboard Brake Drums	Tool Box:	Both Curbside and Streetside Mounted with Lockable Door (14" H x 24" W x 24" D)
Axles:	2-25,000 Lb. Tandem Dual Tire, Oil Bath Bearings	Hydraulic Winch:	No Winch Std
Suspension:	Neway RLU228 Air Ride 22,500 Lb. Capacity	Tilt Cylinders:	2- 4" Bore
Brakes:	12.25 x 7.5 Full Air/Spring Brakes ABS, 4S2M	Undercarriage:	1- 4" x 126"; Centralized Grease System
Oil Seal Hubs:	Internal Mated Assembly	Load Angle:	9 Degree
Hitch:	4 Foot Pintle Hook 15,000 Lb. Vertical Load Eye with Adjustment of 23" -	Accessories:	Approach Plate with Six Key Hole Tie Downs, Automatic Slack Adjusters
		Hydraulic Valve Body:	Prince Electronic

32" from Ground Level
Loaded Ground Clearance: 20 Inches
Loaded Deck Height: 38 Inches
Width: 102 Inches
Decking: 1-3/8" Apitong Hardwood

*Capacity ratings are frame capacities only. Actual load capacities may be restricted by factors such as gross axle weight ratings (GAWR) or state and federal regulations.

Specifications subject to change without notice.

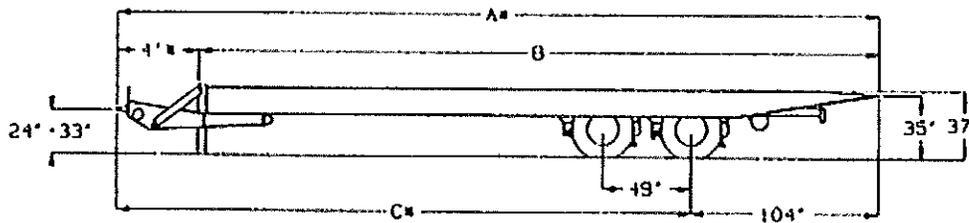

Enlarge Drawing

MODEL	A	B	C
345E-31	35'	31'	26' 8

*Indicates dimension may change due to options indicated.

OPTIONAL EQUIPMENT

TIE DOWN RINGS:

- Recessed Mounted "D" Rings (Each) (Not Totally Recessed with Additional Crossmembers)
- Flush Mounted "D" Rings (Each)
- "D" Ring Bolt on at Winch (Only one Location Available)
- Single Slot Ratchet Winch for 4" Nylon Strap-Weld On-Less Strap-Opposite Side Tiedown Required

HITCH:

- 5' Hitch for Tractor with 1' Bed Overhang
- 7' Hitch for Tractor with 3' Bed Overhang
- Tilting Safety Latch mounted on Hitch

WINCH AND ACCESSORIES:

- 12,000 Lb. Braden Winch-Front Mount
- 20,000 Lb. Braden Winch-Front Mount
- Cable Roller Guide for Winch
- Guard, Winch 12/20K (cannot be used in conjunction with Pivoting Cable Roller Guide)
- Wireless Remote Control - Six Function with Prince valve body
- Dual Hydraulic Controls - Street and Curbside

DECK AND ACCESSORIES:

- 96" in Lieu of 102" Standard
- 1/8" Steel Tread Plate in Lieu of Wood Standard
- 24" Pull-Out Extensions (Capacity not to Exceed 50% of Trailer Capacity)(Steel)

SUSPENSION:

- Spring Suspension Transpro Mono Leaf - in Lieu of Air Ride Std.

Dock Level Hydraulic 62,000 Lb. 1 Pair

HYDRAULIC POWER SOURCE:

Air Shift PTO & Wet Kit for Tractor - Not Installed (30 Gallon Tank)
Installation of PTO & Wet Kit
Hydraulic Quick Couplers 1 Male/ 1 Female (Matches Trailer) (Part #105902)
Polished Aluminum Hyd. Tank,(19"Wx24"D") (Side Mt.) in Lieu of STD
27 H.P. Engine Pkg.--No Curb Side Tool Box

TIRES AND RIMS:

235/75R 17.5 Michelin Tires in Lieu of Std.
Spare Double Coin Tire & Hub Pilot Type Rim (235/75R 17.5)
Spare Michelin Tire & Hub Pilot Type Rim (235/75R 17.5)
Hubometer
Pressure Guard Air Inflation

SPECIAL PRICES:

Hot Dip Galvanizing (Trailer Frame is Totally Submerged) -Adds minimum of 3 weeks to delivery
Paint over Galvanizing-Sides Only with STD Colors Only
Paint over Galvanizing-Top Surface Only with STD Colors Only
Special Paint: Contact Factory

[Click here to view PDF of literature.](#)


[Click Here to receive printed literature for this product.](#)
(Make sure you click on 345E in the product listing)

[Return to Landoll Transportation](#)

1900 North Street | Marysville, Kansas 66508 | (785) 562-5381
© 2002 Landoll Corporation, All rights reserved



Proven Solutions

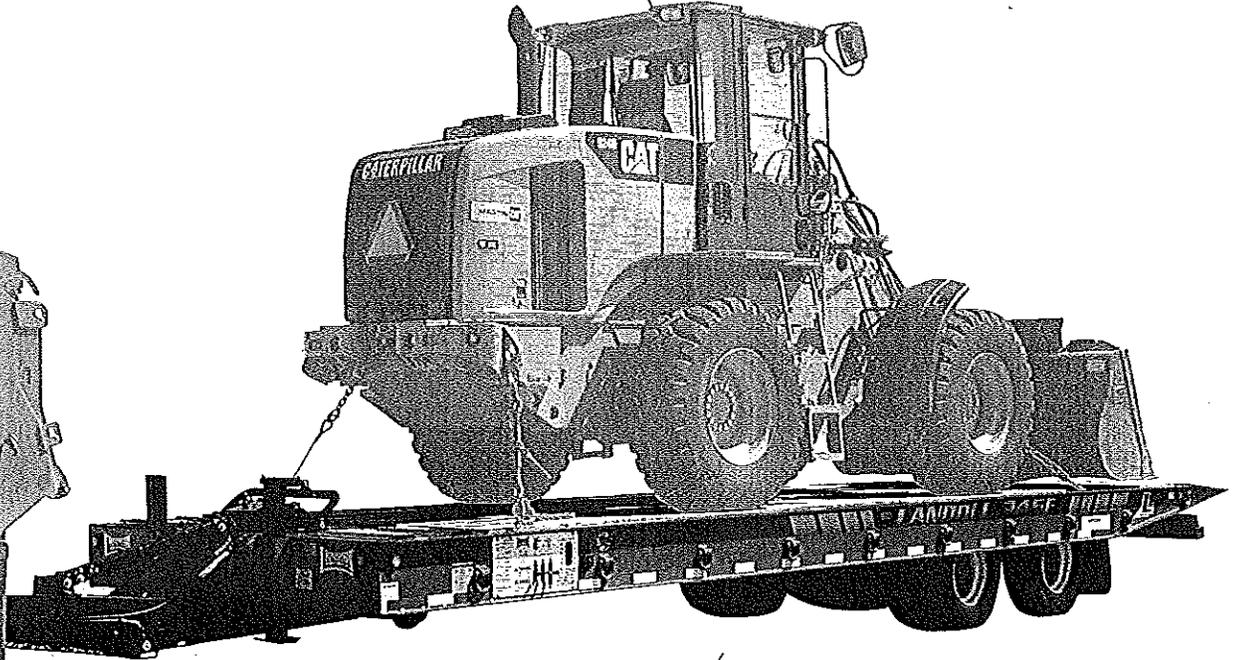

LANDOLL 345



PINTLE HITCH TRAILER









Standard & Optional Equipment/Features

Model 345E Pintle Hitch Trailer

S=Standard O=Optional

MODEL 345E	20 TON	40,000#
MAIN FRAME		
- Fabricated 80,000# PSI Yield Perimeter Beam Design		
- Fabricated Inner Beams 80,000 PSI Web and Top Flange, 100,000 PSI Bottom Flange		
HITCH		
- Four Foot Pintle Hook with 15,000# Vertical Load Eye with Adjustment of 23"-32" from Ground Level		
- 5' Hitch for Tractor with 1' Bed Overhang		
- 7' Hitch for Tractor with 3' Bed Overhang		
CROSSMEMBERS		
- 3" x 4" Jr. I-Beams Alternating on 8" Centers		
WINCH		
- None		
- 12,000# Braden - Front Mount		
- 20,000# Braden - Front Mount		
- Cable Roller Guide for Winch		
- Wireless Remote Control		
DECK AND FEATURES		
- 102" Wide		
- 1-3/8" Apitong		
- Deck Rating 30,000# in 10'		
- 9° Load Angle		
ACCESSORIES		
- Approach Plate with Four Keyhole Tie Downs		
- Dual Hydraulic Controls Street & Curb Side		
TIE DOWNS / CHAIN GOTCHAS		
- Double Keyhole Chain Slots & Stake Pockets on 24" Centers		

MODEL 345E	20 TON	40,000#
TOOL BOX		
- Curb & Street Side Mounted with Lockable Doors		
14" H x 24" W x 24" D		
PARKING STANDS		
- Pin Drop		
SUSPENSION/AXLES		
- Neway RLU228 Air Ride 22,500# Capacity		
- Centralized Grease System		
- 2 - 25,000# Tandem Dual Tire, Oil Bath Bearings		
BRAKES		
- 12.25 x 7.5 Full Air/Spring Brakes ABS, 4S2M		
TIRES / RIMS		
- 10R 17.5 Radial Tires		
- 17.5 x 6.75 Tubeless Rims		
- Hub Pilot/Steel Outboard Brake Drum		
HYDRAULIC HOOK UP		
- Hydraulic Quick Couplers/2500 PSI-17 GPM		
LIGHTS		
- Grote "SuperNova" LED-10 Year Warranty		
- Grote "Ultra-Blue Seal" Wiring Harness - 7 Year Warranty		
FINISH / COLOR		
- Steel Grit Shot Blast to Bright Metal		
- Zinc Rich Primer		
- TGIC Polyester Powder Coat Black, Red, Green, Yellow, White, Blue		

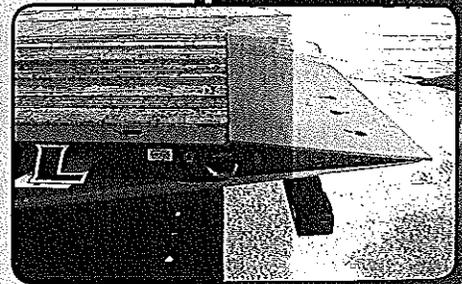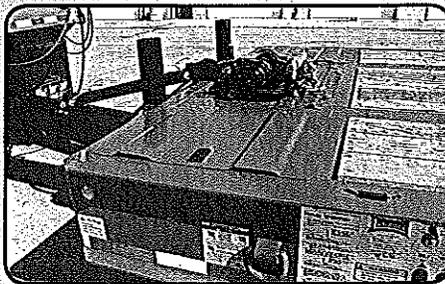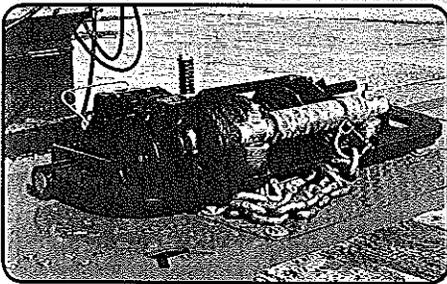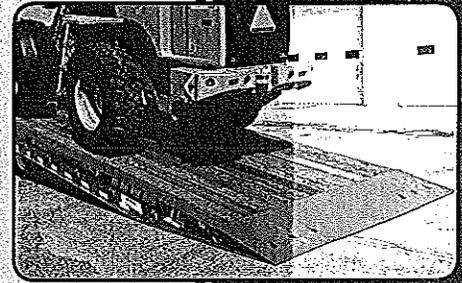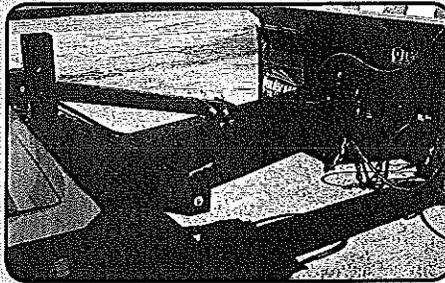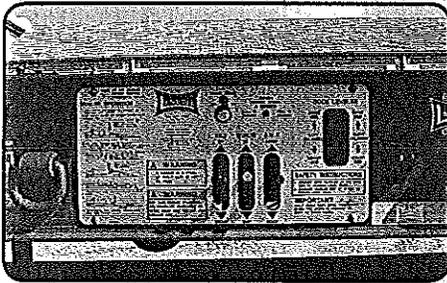

Specifications subject to change without notice. Pictures may show optional equipment.

Call 1-800-428-5655 for Proven Solutions for your Hauling needs

1900 North Street • Marysville, KS 66508 • Ph 785-562-5381

Fax 785-562-4893 • www.landoll.com

Remember: Quality is Always a Bargain!





ORDER CONFIRMATION -- TRAILERS
LANDOLL CORPORATION
 1900 NORTH STREET
 MARYSVILLE, KS 66508
 PH: 800-428-5655 FAX: 888-293-6779
 www.landoll.com



TRAILER #: BID REQUEST 3-121129TV

DATE: 11/26/2012

SOLD TO: MISSOURI DEPARTMENT OF TRANSPORTATION
 ADDRESS: PO BOX 270 1320 CREEK TRAIL DRIVE
 CITY: JEFFERSON CITY ST: MO ZIP: 65102
 CONTACT: TOM VEASMAN CELL:
 PH: 573-522-4404 FAX: 573-526-1218
 E-MAIL tom.veasman@modot.mo.gov

SHIP TO:
 ADDRESS:
 CITY:
 CONTACT:
 PH:
 E-MAIL

MODEL YEAR:	2013	2 AXLE RIGID	ENGINEERED BY:	DATE:	2013 PRICE
STD MODEL:	835D-51 AG	BED: 30'	LENGTH: 50.5'	PIN SETTING: 15"	\$66,945.00
NECK:	12' GOOSENECK				STD
DECK TYPE:	APITONG WOOD DECK WITH CENTER FILLED				STD
WIDTH:	102" WIDTH				STD
SUSPENSION:	AIR RIDE SUSPENSION				STD
WHEEL RIMS:	(8) STEEL HUB PILOT WHEELS WITH OUTBOARD BRAKE DRUMS				STD
TIRES:	255/70R 22.5 DOUBLE COIN LRH				STD
FEATURES:	27" ALUMINUM PULL-OUT SIDE EXTENSIONS 4 PRONG ELECTRICAL OUTLET AT REAR OF TRAILER FOR EMERGENCY LIGHTS (3) PAIR FLAG HOLDERS , LED LIGHT PACKAGE, CENTRALIZED GREASE SYSTEM BOOM TROUGH, HIGH VISIBILITY DECAL PACKAGE FLIP AXLE ATTACHMENT HINGES, ELECT, AIR				STD STD STD STD STD
OPTIONS:	G/N MOUNTED, BOLT-ON LOCKABLE ,TOOL BOX, CURB SIDE, (24"W X 22.5"D X 14"H) Flip Third Axle Assembly				\$470.00 \$12,950.00
VIN #:	1LH835VH		PAINT COLOR:	POWDER COAT BLACK	CODE: 128000

SALESMAN:		F.O.B.:	MARYSVILLE, KS.	TOTAL PRICE:	\$80,365.00
CUSTOMER #:		F.E.T. EXEMPTION #:		DISCOUNT:	-\$16,876.65
CUSTOMER P.O. #:		TERMS:		MUNI DISCOUNT:	-\$3,174.42
ESTIMATED COMP.:				SUBTOTAL:	\$60,313.93
ENG REQUEST :				F.E.T.:	EXEMPT
				KS TIRE TAX:	N/A
				FREIGHT:	\$750.00
				TOTAL:	\$61,063.93
				DOWNPAYMENT:	
				BALANCE DUE:	\$61,063.93

F.E.T. CALCULATION:	
SALE PRICE:	
X 12%:	
TIRE DEDUCT:	
F.E.T.:	

CUSTOMER SIGNATURE: _____
 AUTHORIZED SIGNATURE: GARY DWERLKOTTE

NO CHANGES MADE PRIOR TO COMPLETION WITHOUT APPROVAL


[Return to Landoll Transportation](#)Choose Trailer Type Then Choose Model

Updated November 2, 2012

Trailers - Detachable

LANDOLL 835D-AG SERIES

Model	Capacity*	Base Weight	Deck	Axles	Tires & Ply Rating
835D-48AG	35 Ton	18,000 Lbs.	26' 6"	2	(8) 255/70R 22.5 LRH
835D-51AG	35 Ton	18,900 Lbs.	30'	2	(8) 255/70R 22.5 LRH
835D-53AG	35 Ton	19,800 Lbs.	32'	2	(8) 255/70R 22.5 LRH
835D-R-53AG	35 Ton	18,750 Lbs.	27'	3	(12) 255/70R 22.5 LRH
835D-S-53AG	35 Ton	18,300 Lbs.	25' 8"	2	(8) 255/70R 22.5 LRH
835D-S60-53AG	35 Ton	19,900 Lbs.	25' 8"	3	(12) 255/70R 22.5 LRH

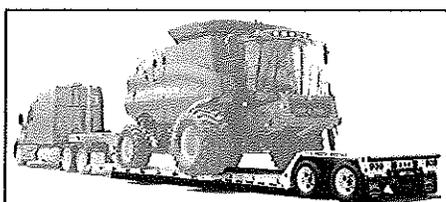[View Photo Gallery](#)

Photos may show optional equipment

STANDARD EQUIPMENT

Capacity:	35 Tons	Side Extension:	27" Aluminum Pullouts (Lower Deck)
Deck Rating:	60,000 lbs. in 12' Foot	Gooseneck:	12'
Estimated Base Weight:	18,900 lbs., (835AG) +/- 3%	Air/Electrical:	7 Way Receptacle
Main Frame:	Fabricated 11 1/4" Beam, 100,000 PSI Yield Flanges	Hydraulic Hook Up:	Quick Couplers 2500 PSI/17 GPM
Crossmembers:	5"X3" Rec. Tube on 18" Centers	Gooseneck Tie Downs:	D-Rings: 2ea at Front Corner; 2ea at Back
Tires:	255/70R 22.5 LRH Double Coin	Lower Deck Tie Downs:	Side Mounted Nylon Strap/Chain Tiedowns; Side Mounted D-rings on 36" Centers
Rims:	22.5 X 8.25 Steel	Rear Trunnion Tie Downs:	D-Rings: 2ea at Base Flush Mounted on Top of Inner Beams; 2ea Web Mounted on Top; 2ea Rear Flush Mounted on Top of Inner Beams; 2ea Top of Slope (Outer Web)
Wheels:	Hub Pilot / Steel Outboard Brake Drums	Wiring Harness:	Grote "Ultra-Blue Seal"-7 year warranty
Axles:	25,000 lbs. Capacity	Lights:	Grote "SuperNova" LED-10 year warranty
Suspension:	Neway Air Ride	Finish:	Steel Grit Shot Blast to Bright Metal
Brakes:	25,000 lb. Capacity 16.5 X 7 Full Air/Spring Brakes on Both Axles, ABS 4S2M	Powder Coat Color:	White/Black/Yellow/Blue/Red/Green
Oil Seal Hubs:	Internal Mated Assembly	Decals:	Hi-Visibility Reflective Package
Pin Setting:	15 Inches	Tool Box:	None Standard
Swing Clearance:	84 Inches	Cylinders:	2 - 6" X 30" Horizontal Mount 70,000 lb. Capacity Each, Centralized Grease System, Powder Coat Black
Loaded Ground Clearance:	7 Inches	Hitch:	Patented Automatic Gooseneck Lock Engagement
Loaded Deck Height:	18 1/4 Inches		
Width:	102 inches		

Decking: 1 1/2" Apitong, Full Width **Accessories:** 835AG 48',51' or 53' Frame Prepared w/Bkts,Elec and Air for 3rd axle Flip

Capacity ratings are frame capacities only. Actual load capacities may be restricted by factors such as gross axle weight ratings (GAWR) or state and federal regulations.

Specifications subject to change without notice.

*Indicates dimension may change due to options indicated.

OPTIONAL EQUIPMENT

GOOSENECK:

Removable Aluminum Upper Deck #171909 - Full Width for 12' Gooseneck (124"L X 102" W) 10,000 lb. Capacity
 12,000 lb Winch - Front Deck Mounted (Available with Wet Kit only)
 20,000 lb Winch - Front Deck Mount (Available with Wet Kit only)
 30,000 lb. DP Planetary Winch - Front Deck Mount (Available with Wet Kit Only)
 Gooseneck Mud Flaps
 Bolt On Chain and Binder Rack Between Lock Arms
 Wireless Remote Control for Winch
 Bolt-On Lockable Tool Box (Curb Side) (24"W x 22.5"D x 14"H)

TRUNNION:

Removable Aluminum Rear Deck # 105190 (73"L X 102"W) 10,000lb Capacity (For 835AG-48,835AG-51,835AG-53 STD 2 axle only)
 Removable Aluminum Rear Deck #129311 (127"L X 102"W) 10,000lb Capacity (For 835R & 835S only)
 Removable Aluminum Rear Deck (83"L X 120"W)ext. 10,000 lb. Capacity (For 835 2 axle 60" Spread)
 Weld on Steel Deck with Wood Decking (For 835R & 835S Only)
 Flip Third Axle Assembly (Available only on 835AG-48,835AG-51,& 835AG-53)
 Aluminum Deck for Flip Axle Assembly
 Aluminum Deck for Flip Axle Assembly (10' Wide)
 Hydraulic Flip for Flip Axle Assy.
 Wheel Well Cover, Steel (Weld On) (2 Axle)
 Wheel Well Cover, Steel (Weld On) (3 Axle)
 Boom Trough Cover (1/4" Steel Tread Plate) (2 axle)
 Boom Trough Cover (1/4" Steel Tread Plate) (3 axle)
 Poly Fenders for Trunion (2 Axle)
 Poly Fenders for Flip

ACCESSORIES:

Flag and Banner Package (6 Flags & 2 Overwidth Banners)
 Emergency Flashing Light Package (2 Magnetic Amber Rotating Emergency Lights)
 Strobing Light Package in Bumper (Multi-Functional Strobe/Turn) (Each) One required for Frame, One required for Flip
 Gooseneck Stop/Turn/Tail Lights & Work Lights
 Four Corner Light Package
 Battery Back-up for Strobe Lights

DECK AND ACCESSORIES:

Aluminum Ladder Ramp Assy 70" Long, (One pair, Part# 125836) "Lower deck to rear trunion" (For trailer built after 11-03) 9,000 lb capacity (4500 each)
 Adjustable Alum. Ladder Ramp with Rod Bracket, full width (part #148786 & #110527)
 D - Ring Bolt-on (4 Available Locations -Gooseneck 2 Locations Trunion)(Each)

Flush Mounted "Angled" D-Ring (each)
 Recessed Mounted D-Rings
 3/8x 3 Double Keyhole Strap full length lower deck each side (162467) 30',(166848) 32'
 Ramp for Loading of Low Ground Clearance Equipment (50,000# capacity)
 Ramp Lift Assist (Hand Crank)
 Slope Cover Assy. 835 (Non Load Bearing) #135811
 Aluminum Filler for Front Pullout (advise when loading track units)
 Cotton Picker Wheel Wells (on 835C-53AG only)
 10' Wide Main Deck and Trunion in Lieu of STD (2 axle frame, 31' deck, 60" spread, Only)

SUSPENSION:

Air Raise and Lower Valve
 Air Weigh Digital Scale System

HYDRAULIC POWER SOURCE:

Air Shift PTO & Wet Kit for Tractor - Not installed (30 gallon)
 Installation of PTO and Wet Kit
 Hydraulic Quick Couplers 1 Male / 1 Female (Matches Trailer) (P 105902)
 Polished Aluminum Hyd. Tank,(19"Wx24D") (Side Mt.) in Lieu of STD
 13 H.P. Honda Engine Package Gooseneck Mounted with Cover (Net 10.2 HP)

TIRES AND RIMS:

255/75R 22.5 Michelin Tires in lieu of Std. (Price per Axle)
 Spare 255 70R 22.5 Double Coin Tire & Hub Pilot Type Rim
 Spare 255 70R 22.5 Michelin Tire & Hub Pilot Type Rim
 22.5 Aluminum Wheel (10 Bolt Polished) in lieu of Standard (Each)
 22.5 Aluminum Wheel(10 Bolt Machined) in lieu of Standard (Each)
 22.5 Aluminum Wheel (10 Bolt Dura-Brite) in lieu of Standard (each)
 Hubometer
 Crossfire Air Equalizers (Price per Axle)
 Pressure Guard Air Inflation (2 Axles)
 Pressure Guard Air Inflation (3 Axles)

SPECIAL PRICES:

Hot Dip Galvanizing (Lower deck and Trunion) G/N Powder Coated Only
 - No Paint available for Lower deck
 Hot Dip Galvanizing of Flip Axle Assy.

[Click here to view PDF of literature.](#)

[Click Here to receive printed literature for this product.](#)
 (Make sure you click on 835D-AG SERIES in the product listing)


[Return to Landoll Transportation](#)

1900 North Street | Marysville, Kansas 66508 | (785) 562-5381
 © 2002 Landoll Corporation, All rights reserved

Model 825-835



Proven Solutions

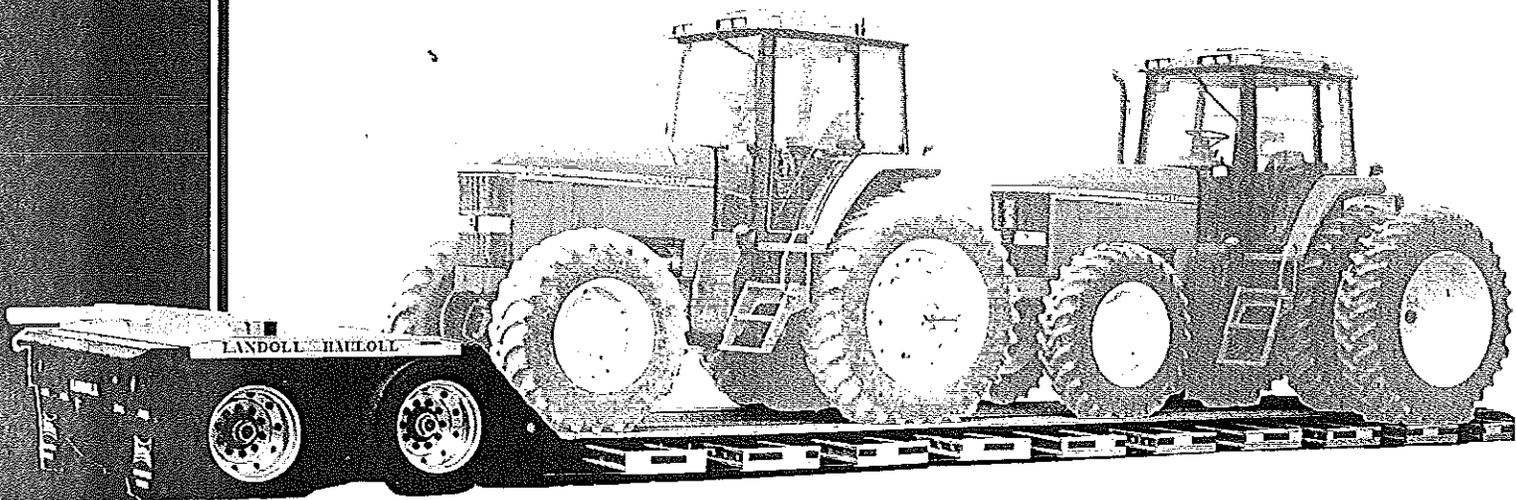

LANDOLL 825AG/835AG
DETACHABLE GOOSENECK




Standard & Optional Equipment/Features

Model 825AG/835AG Detachable Gooseneck

S=Standard O=Optional

MODEL 835 AG	35 TON	70,000#
MODEL 825	27.5 TON	55,000#
MAIN FRAME		
- Fabricated 100,000 PSI Four Beam Frame	S	S
- Capacity - 55,000# Distributed / 50,000# Concentrated in 16'	S	S
- Capacity - 70,000# Distributed / 60,000# Concentrated in 12'	S	S
KING PIN SETTING		
- 84" Swing Clearance	S	S
CROSSMEMBERS		
- 5" x 3" High Tensile Strength Tubing on 18" Centers	S	S
GOOSENECK, DECK & ACCESSORIES		
- 12' Gooseneck	S	S
- 102" Removable Aluminum Front and Rear Decks	O	O
- 102" Width	S	S
- Lower Deck Length 27'7" through 29'7", with 49' or 51' Overall Length	S	S
- Lower Deck Length 25'9" through 32', with 48' or 53' Overall Length	S	S
- 17" Deck Height (Loaded)	S	S
- 18 1/4" Deck Height (Loaded)	S	S
- 1 1/2" Nominal, Apitong Full Width	S	S
- 27" Aluminum Telescoping Side Extensions	S	S
- Flag and Banner Package (6 Flags & 2 Overwidth Banners)	O	O
TIE DOWNS / CHAIN GOTCHAS		
- Double Key Hole Chain Slots Located on 36" Centers	S	S
- 2 D-Rings at Base of Rear Trunnion Flush Mounted on Top of Inner Beams	S	S
- 4 D-Rings - Gooseneck Beam (Bolt On)	O	O
- 4 D-Rings - Trunnion Main Beam (Bolt On)	O	O
- Side Mounted Nylon Strap / Chain Tie Downs	S	S
- Side Mounted D-Rings on 36" Centers	S	S
- 2 D-Rings Front Corner of Gooseneck	S	S
- 2 D-Rings Web-Mounted Top of Trunnion	S	S
- 2 D-Rings Rear of Trunnion, Flush Mounted on Top of Inner Beams	S	S
- 2 D-Rings Back of Gooseneck	S	S
- 2 D-Rings at Top of Trunnion Slope (Outer Web)	S	S
TOOL BOX		
- 11"H x 47"W x 25"D	S	S
- 11"H x 33"W x 25"D Street Side	S	S

MODEL 835 AG	35 TON	70,000#
MODEL 825	27.5 TON	55,000#
WINCHES & ACCESSORIES		
- Worm Gear 12,000# with 85' of 1/2" Cable*	O	O
- Worm Gear 20,000# with 85' of 5/8" Cable*	O	O
- Planetary 30,000# with 85' of 5/8" Cable	O	O
LIFT CYLINDER		
- 2 - 6" x 30" Horizontal Mount 70,000# Capacity	S	S
AXLES		
- 25,000# Tandem Dual Tire, Oil Bath Bearings	S	S
SUSPENSION		
- Neway Air Ride, 25,000# Capacity	S	S
- Centralized Grease System	S	S
- Air Raise & Lower Valve	O	O
- Digital Air Weigh Scale System	O	O
BRAKES / HUBS		
- Automatic Slack Adjusters	S	S
- 16.5 x 7 Full Air/Spring Brakes (ABS, 4S2M)	S	S
- 22.5 x 8.25 Hub Pilot/Steel Outboard Hubs	S	S
TIRES		
- 255 / 70R 22.5 LRH	S	S
- Spare Tire & Hub Pilot Type Rim (255 / 70R 22.5)	O	O
WHEEL ACCESSORIES		
- Aluminum Wheel 7.5 x 22.5	O	O
- Hubometer	O	O
HYDRAULIC POWER SOURCE		
- Air Shift PTO & Wet Kit for Tractor - Not Installed	O	O
- 11 HP Honda Engine Pkg. with Frt. Cover Frt. Ext. Mount	O	O
LIGHTS		
- Sealed, Potted L.E.D.	S	S
FINISH/COLOR		
- Steel Grit Shot Blast to Bright Metal	S	S
- TGIC Polyester Powder Coat	S	S
White, Black, Yellow, Blue, Red, Green		
WEIGHT (BASE)		
- 49' - 825 - 16,400#	S	
- 51' - 825 - 16,950#	S	
- 48', 51' - 835AG - 18,900#		S
- R-53' - 835AG - 18,750#		S
- S-53' - 835AG - 18,300#		S
- S60-53' - 835AG - 19,900#		S
ESTIMATED WEIGHTS		

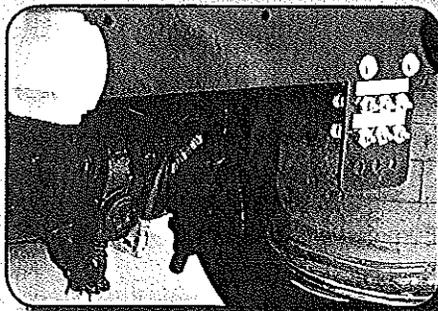

Manufactured by Landoll Corporation, *the centralized lube system* provides remote grease zerks to each individual greaseable point on the trailer undercarriage including the slack adjusters and camshaft bearings, which both require regular grease for optimum performance. Maintenance time and costs are reduced significantly.


Specifications subject to change without notice. Pictures may show optional equipment.

**Call 1-800-428-5655 for
Proven Solutions
for Your Hauling Needs!**

1900 North Street • Marysville, KS 66508 • Ph 785-562-5381

Fax 785-562-4893 • www.landoll.com

Remember: Quality is Always a Bargain!

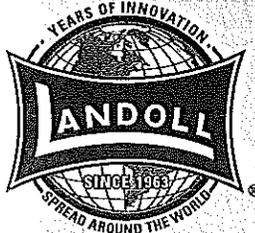



QUOTE LANDOLL -- TRAILERS
LANDOLL CORPORATION
 1900 NORTH STREET
 MARYSVILLE, KS 66508
 PH: 800-428-6666 FAX: 888-293-6779
 www.landoll.com



TRAILER #: BID REQUEST 3-121129TV

DATE: 11/26/2012

SOLD TO: MISSOURI DEPARTMENT OF TRANSPORTATION			SHIP TO:		
ADDRESS: PO BOX 270 1320 CREEK TRAIL DRIVE			ADDRESS:		
CITY: JEFFERSON CITY	ST: MO	ZIP: 65102	CITY:		
CONTACT: TOM VEASMAN	CELL:		CONTACT:		
PH: 573-522-4404	FAX: 573-526-1218		PH:		
E-MAIL: tom.veasman@modot.mo.gov			E-MAIL:		

MODEL YEAR:	2013	3 AXLE RIGID	ENGINEERED BY:	DATE:	2013 - PRICE -
		54" SPACING			
STD MODEL:	855C-53	BED: 26'	LENGTH: 53'	PIN SETTING: 15" / 33"	\$71,720.00
NECK:	12' 5" GOOSENECK WITH DUAL PIN SETTINGS				STD
DECK TYPE:	APITONG WOOD DECK TRACK AREA				STD
WIDTH:	102" WIDTH				STD
SUSPENSION:	AIR RIDE SUSPENSION, 3-25,000 LB AXLES ON 54" SPACING				STD
WHEEL RIMS:	(12) STEEL HUB PILOT WHEELS WITH OUTBOARD BRAKE DRUMS				STD STD
TIRES:	255/70R 22.5 DOUBLE COIN LRH				STD
FEATURES:	OUTRIGGERS FOR 26' DECK				STD
	HALF FRONT BOLSTER ASSEMBLY WITH TRACTION BARS				STD
	MIDDLE BOLSTER ASSEMBLY WITH "D" RING ON OUTER EDGE, 3PR. FLAG HOLDERS				STD
	BUCKET TROUGH AT REAR OF LOWER DECK (REAR THREE CROSSMEMBERS)				STD
	BOOM TROUGH W "V" TYPE REAR BUMPER				STD
	CENTRAL GREASE SYSTEM				STD
OPTIONS:	BOLT ON CHAIN AND BINDER RACK BETWEEN LOCK ARMS				\$360.00
	BOOM TROUGH COVER				\$480.00
	AIR LIFT 3RD AXLE				\$1,180.00
	GOOSENECK MUD FLAPS				\$325.00
	Fenders for STD. 12'5" Gooseneck				\$1,315.00
	Center Filled Wood Deck - Apitong				\$1,590.00
	Extra Crossmembers Track Area 1' Centers				\$1,895.00
	Hubometer				\$150.00
	Full Covered Wheel Area 1/8 Tread Plate (Non-Weight Bearing)				\$3,125.00
	Lockable Hinged Cover for Storage Area				\$250.00
VIN #:	PAINT COLOR: POWDER COAT BLACK			CODE: 128000	

SALESMAN:		F.O.B.:	MARYSVILLE, KS.	TOTAL PRICE:	\$82,390.00
CUSTOMER #:		F.E.T. EXEMPTION #:		DISCOUNT:	-\$17,301.90
CUSTOMER P.O. #:		TERMS:			
ESTIMATED COMP.:				SUBTOTAL:	\$65,088.10
ENG REQUEST:				F.E.T.:	\$0.00
				KS TIRE TAX:	N/A
				FREIGHT:	\$750.00
				TOTAL:	\$65,838.10
F.E.T. CALCULATION:		CUSTOMER SIGNATURE:	_____	DOWNPAYMENT:	
SALE PRICE:		AUTHORIZED SIGNATURE:	GARY DWERLKOTTE	BALANCE DUE:	\$65,838.10
X 12%:					
TIRE DEDUCT:					
F.E.T.:					

1008-0394 rev 004 DATE 05/06/09

NO CHANGES MADE PRIOR TO COMPLETION WITHOUT APPROVAL

[Return to Landoll Transportation](#)

Choose Trailer Type


Then Choose Model

Updated November 15, 2012

Trailers - Detachable

LANDOLL 855C- CONSTRUCTION SERIES

Model	Capacity*	Base Weight	Length	Deck	Axles	Tires & Ply Rating
855C-48CA	55 Ton	22,950 lbs	47' 11"	22.5'	3	(12) 255/70 22.5 LRH
855C-53	55 Ton	23,900 lbs	53'	26'	3	(12) 255/70 22.5 LRH

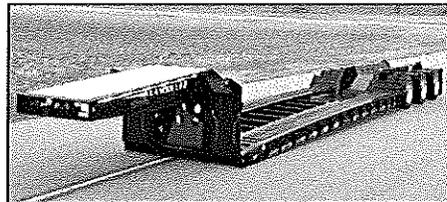

[View Photo Gallery](#)

Photos may show optional equipment

STANDARD EQUIPMENT

*Capacity:	55 Ton	Gooseneck:	12'5" Dual Drop-In King Pin Settings, w/ 7 Position Fifth Wheel Ride Height (10'9" Gooseneck Std on 855-48CA)
Deck Rating:	110,000 Lbs. In 12 feet	Air/Electrical:	Glad Hand / 7 Way Receptacle
Estimated Base Weight:	23,900 Lbs. (53')	Hydraulic Hook Up:	Quick Couplers 2500 PSI/17GPM
Main Frame:	Fabricated 13" Beam, 100,000 PSI Flange	Lights:	Grote "SuperNova" LED-10 year warranty, Grote "Ultra Blue Seal" Harness 7-year warranty
Crossmembers:	8" High Tensile I-Beams on 24" Centers	Finish:	400 Degree Bake/Steel Grit Shot Blast to Bright Metal
Tires:	255/70R 22.5 LRH Double Coin	Color:	Zinc Rich Powder Primer Base, Powder Paint Color Choices: White/Black/Yellow, Blue, Red, Green
Rims:	22.5 X 8.25	Tie Downs:	24 Total, All Angled "D" Rings, 7 each side lower deck, one on the end of each bolster, two at rear of lower deck, two at the top of rear slope, two at rear of Trunnion
Wheels:	Hub Pilot/Steel Outboard Brake Drums	Storage Area:	1 - Between Main Frame at Front of Lower Deck, 41"W x 24"L x 10"D
Axles:	3 - 25,000 lb. Dual Tire, Oil Bath Bearings 54" Spacing on 53', 50" Spacing on 48', Auto-Stacks all Axles	Cylinders:	Main Gooseneck Cylinders Horizontally Mounted
Suspension:	Neway Air Ride 25,000 Lb Capacity w Mechanical Ride-Height Control Valve	Accessories:	4th Axle Ready, 12" Swing-Out Outriggers; HD Sloped Front Approach w Traction Bars, 6' Recessed Bucket Trough at rear of lower deck, Open Boom Trough w "V" Type Bumper
Brakes:	16.5X7 Full Air with Spring Brakes on Three Axles, ABS 4S/2M	Bolsters:	Half Front Bolster w Traction Bars, Lowered Bolster Between Tires (20,000 lb. capacity); Rear Bolster (17,500 lb. capacity)
Oil Seal Hubs:	Internal Mated Assembly		
Pin Setting:	Dual Pins 15" and 33"		

Swing Clearance:	Dual Swing, 108" and 90"
Loaded Ground Clearance:	6.5 Inches
Loaded Deck Height:	19.5 Inches
Width:	102 Inches
Decking:	Full 2" Apitong Track Area

Specifications subject to change without notice.

[Download PDF](#)

*Indicates dimension may change due to options indicated.

OPTIONAL EQUIPMENT

GOOSENECK:

10'9" Gooseneck with 90" Swing Clearance, Shortens Overall Length (Std on 855-48CA)
Deduct on 53'or 54'
Fenders for STD. 12'5"Gooseneck
Fenders for 10' 9" Gooseneck
Aluminum Cover Plate (HD 3/16" X 72" long)
Gooseneck Light Bar (2 LED STOP/TURN w 2 LED Whitelight Backup)
Gooseneck Mud Flaps
Bolt On Chain and Binder Rack Between Lock Arms

OUTRIGGERS:

Swing-Out Outrigger Plank, 1 set of 4 Boards 2 3/4" T X 5" W X 84" L (Part #163580)
Outrigger Plank Storage Lock Downs

TRUNNION:

60" Axle Spacing (Changes deck/trailer length)
Boom Trough Cover
Flip 4th Axle Assembly (matches trailer axle spacing)
Hydraulic Flip For 4th Axle (Effects Boom Trough)
Full Covered Wheel Area 1/8 Tread Plate (Non-Weight Bearing) Boom Trough remains open
(Raised 3" above frame with 275/70R 22.5 Tires)
Full Covered Wheel Area 1/4 Plate (Weight Bearing) Boom Trough remains open (Raised 3"
above frame with 275/70R 22.5 Tires)
Steel Bolt On Wheel Covers, (PER AXLE) (Weight Bearing) for 255/70R 22.5 only
Bolt on Poly Fenders (3 Axle) (Non Weight Bearing)
Bolt on Poly Fenders for Flip

ACCESSORIES:

2-Magnetic Amber Emergency Flashing Light Package
Strobing Light Package in Bumper (Multi-Functional Strobe/Turn) (ea.) one required for
trailer, one for Flip
Battery Back-up for Strobe Lights
Gooseneck Stop/Turn/Tail Lights & Work Lights

TIE DOWN RINGS:

Extra Flush Mounted "D" Rings
Extra Flush Mounted Angled "D"
3/8x3-1/2" Double Keyhole Strap full length lower deck (ea.)

DECK AND ACCESSORIES:

Center Filled Wood Deck - Apitong
Additional Center Storage Area Center Lower Deck
Lockable Hinged Cover for Storage Area

SUSPENSION:

Air Weigh Digital Scale System
Air Lift/Retract-Per Axle

HYDRAULIC POWER SOURCE:

Air Shift PTO & Wet Kit for Tractor-Not Installed
Installation of PTO & Wet Kit
Polished Aluminum Hyd. Tank,(19"Wx24D") (Side Mt.) in Lieu of STD
Hydraulic Quick Couplers 1 Male/1 Female (Matches Trailer)
13 H.P. Honda Engine Package Gooseneck mounted with Cover (Net 10.2 HP)

TIRES AND RIMS:

255/70R 22.5 Michelin Tires in Lieu of Standard (Price per Axle)
275/70R 22.5 Double Coin in Lieu of Standard (Price per Axle)
275/70R 22.5 Michelin Tires in Lieu of Standard (Price per Axle)
Spare 255/70R 22.5 Double Coin Tire & Hub Pilot Type Rim
Spare 255/70R 22.5 Michelin Tire & Hub Pilot Type Rim
Spare 275/70R 22.5 Double Coin Tire & Hub Pilot Type Rim
Spare 275/70R 22.5 Michelin Tire & Hub Pilot Type Rim
22.5 Aluminum Wheel (10 Bolt Polished) in lieu of Standard (Each)
22.5 Aluminum Wheel (10 Bolt Machined) in lieu of Standard (Each)
Hubometer
Crossfire Air Equalizers (Price per Axle)
Pressure Guard Air Inflation

SPECIAL PRICES:

Hot Dip Galvanizing (Lower Deck and Trunnion) G/N Powder Coated Only
- No Paint available for Lower Deck
Hot Dip Galvanizing of Flip Axle Assy

[Click here to view PDF of literature.](#)

[Click Here to receive printed literature for this product.](#)

(Make sure you click on 855C-CONSTRUCTION SERIES in the product listing)



[Return to Landoll Transportation](#)

1900 North Street | Marysville, Kansas 66508 | (785) 562-5381
© 2002 Landoll Corporation, All rights reserved

Model 835C-855C



Proven Solutions

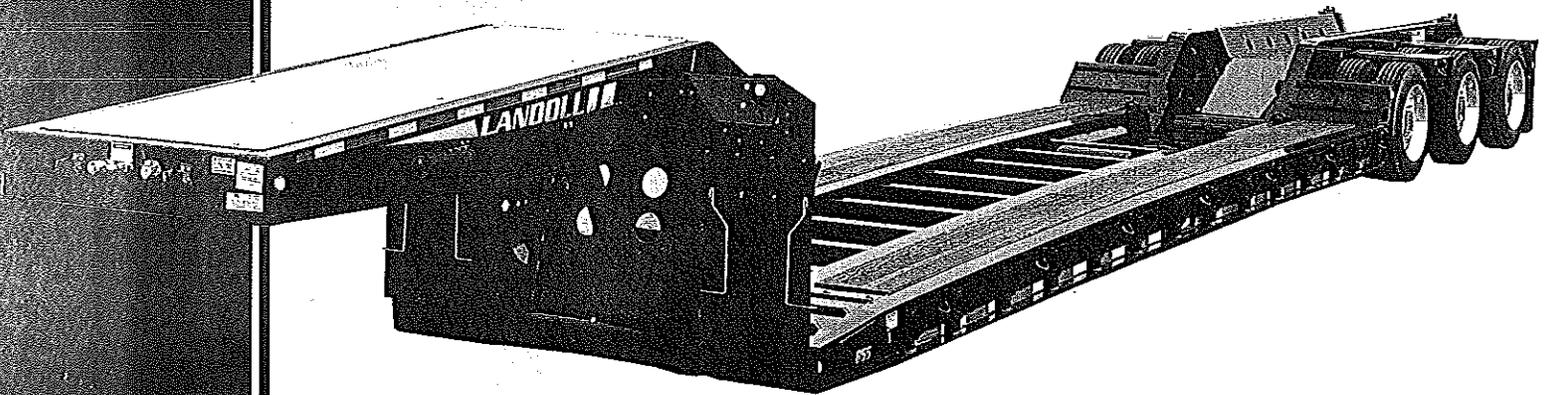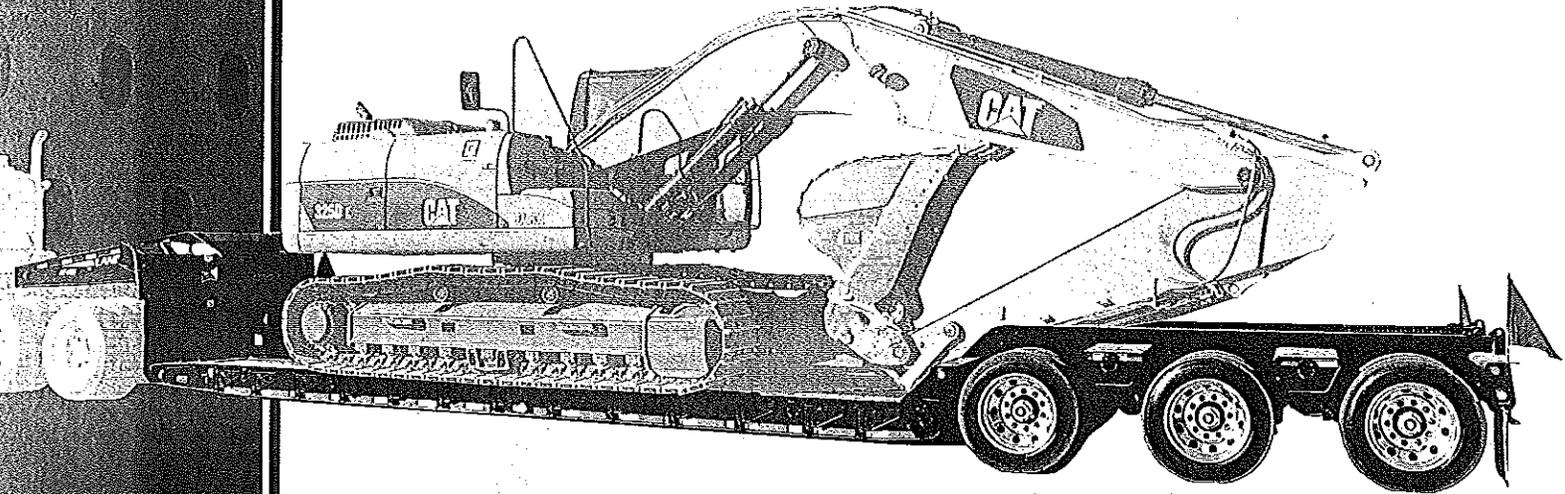

LANDOLL 835C/855C
DETACHABLE GOOSENECK



Standard & Optional Equipment/Features


Model 835C/855C Detachable Gooseneck

S=Standard O=Optional

MODEL 835C	35 TON	70,000#
MODEL 855C	55 TON	110,000#
MAIN FRAME		
- Fabricated 13" Beam 100,000 PSI Flange	S	S
- Capacity - 70,000# Distributed / # Concentrated in 12'	S	S
- Capacity - 110,000# Distributed / # Concentrated in 12'	S	S
KING PIN SETTING		
- 12'5" Dual Pin Settings with 7-Position Fifth Wheel Ride Height	S	S
- 10'9" Gooseneck Standard - 855-48CA	S	S
PIN SETTINGS		
- Dual Pins 15" and 33"	S	S
- Single Pin 15"	S	S
CROSSMEMBERS		
- 8" High Tensile I-Beams on 24" Centers	S	S
GOOSENECK, DECK & ACCESSORIES		
- 3rd Axle Ready	S	S
- 4th Axle Ready	S	S
- 12" Swing-Out Overwidth	S	S
- Half Front Bolster with Traction Bars	S	S
- Lowered Bolster Between Tires	S	S
- HD Sloped Front Approach with Traction Bars	S	S
- 6' Recessed Bucket Trough at Rear of Lower Deck	S	S
- Open Boom Trough with "V" Type Bumper	S	S
- One Pair Flag Holders	S	S
DECK AND FEATURES		
- 102" Wide	S	S
- 2" Nominal Apitong in Track Area	S	S
CYLINDERS		
- Main Gooseneck - Horizontally Mounted	S	S
SWING CLEARANCE		
- Dual Swing, 108" and 90"	S	S
- Single Swing 90"	S	S
LOADED GROUND CLEARANCE		
- 6.5"	S	S
LOADED DECK HEIGHT		
- 19.5"	S	S
- 17.75"	S	S

MODEL 835C	35 TON	70,000#
MODEL 855C	55 TON	110,000#
TIE DOWNS / CHAIN GOTCHAS		
- 24 Total, All Angled D-Rings, 7 Each Side Lower Deck, One on End of Each Bolster, Two at Rear of Lower Deck, Two at Top of Rear Slope, Two at Rear of Trunnion	S	S
STORAGE AREA		
- 1 each Between Main Frame at Front of Lower Deck 41"W x 24"L x 10"D	S	S
SUSPENSION / AXLES		
- Neway Air Ride 25,000# Capacity with Mechanical Ride Height Control Valve	S	S
- Centralized Grease System - All Axles	S	S
- 2 - 25,000# Tandem Dual Tire, Oil Bath Bearings	S	S
- 3 - 25,000# Tandem Dual Tire, Oil Bath Bearings	S	S
- 54" Spacing - 53'	S	S
- 50" Spacing - 48'	S	S
- 54" Spacing	S	S
- Auto Slack Adjusters - All Axles	S	S
BRAKES		
- 16.5 x 7 Full Air with Spring Brakes on Three Axles (ABS, 4S2M)	S	S
TIRES / RIMS		
- 255 / 70R 22.5 LRH	S	S
- 22.5 x 8.25	S	S
- Hub Pilot / Steel Outboard Brake Drums	S	S
HYDRAULIC HOOK UP		
- Hydraulic Quick Couplers / 2500 PSI-17 GPM	S	S
LIGHTS		
- Grote "SuperNova" LED - 10 Year Warranty	S	S
- Grote "Ultra-Blue Seal" Wiring Harness - 7 Year Warranty	S	S
FINISH/COLOR		
- 400 Degree Bake / Steel Grit Shot Blast	S	S
- Zinc Rich Powder Primer	S	S
- TGIC Polyester Powder Coat	S	S
White, Black, Yellow, Blue, Red, Green		
WEIGHT (BASE)		
- 53' - 855 - 23,900# +/- 3%	S	
ESTIMATED WEIGHTS		

Manufactured by Landoll Corporation, the *centralized grease system* provides remote grease zerks to each individual greaseable point on the trailer axles including the slack adjusters and camshaft bearings, which both require regular grease for optimum performance. Maintenance time and costs are reduced significantly.

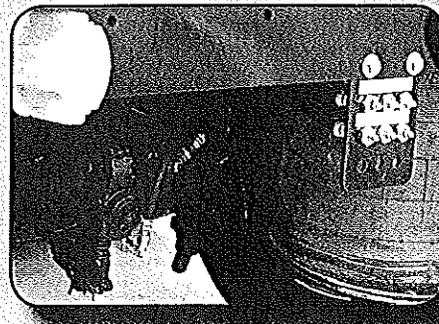

Specifications subject to change without notice. Pictures may show optional equipment.

Call 1-800-428-5655 for Proven Solutions for Your Hauling Needs!


1900 North Street • Marysville, KS 66508 • Ph 785-562-5381

Fax 785-562-4893 • www.landoll.com

Remember: Quality is Always a Bargain!



Landoll Trailer Limited Warranty

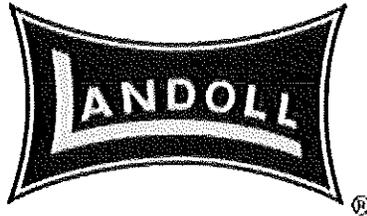

Trailer Limited Warranty

Landoll Corporation warrants each new Trailer Structure manufactured by the Landoll Corporation to be free from defects in materials and workmanship. This limited warranty is subject to specific exclusions and does not apply to trailers which have been: 1) subjected to or operated with loads which, at any time, have exceeded the trailer's rated capacity or design limits; 2) repaired or altered outside the Landoll Corp. factory in any way so as, in our judgment, to affect its stability or reliability; 3) subject to misuse, neglect, an accident, or has been operated in a manner expressly prohibited in the instructions; or not operated in accordance with practices approved by the Landoll Corporation. The Trailer Structure shall be considered the framework of the trailer fabricated by the Landoll Corporation, including but not limited to the mainframe and/or rear frame weldment, gooseneck weldment and/or undercarriage weldment.

The sole obligation of the Landoll Corporation under this warranty shall be limited to repairing or replacing, at its discretion, in accordance with the new Trailer Structure Schedule below, a defective new Trailer Structure which shall be identified to the Landoll Corporation, by way of a Landoll Corporation Warranty Claim Form, within five (5) years from the date of trailer registration. Warranty, expressed or implied, will be denied on any trailer not properly registered with the Landoll Corporation Warranty Department within ten (10) days of the first retail sale. The Landoll Corporation Warranty Staff will identify components listed on a Warranty Claim required to be returned for further analysis. All parts returned to Landoll Corporation **MUST** be shipped with the Return Materials Authorization(RMA) form provided by the Landoll Corporation Warranty Staff. Defective components must be returned by the purchaser to the Landoll Corporation, with transportation and freight charges prepaid, within fifteen (15) days after receipt of the RMA. The examination conducted by the Landoll Corporation of all returned parts shall disclose to its satisfaction the extent the component may be defective.

All labor and parts warranty **MUST** be authorized by Landoll Corporation Warranty Staff. Failure to receive authorization will result in no warranty payment of any kind. Labor will be reimbursed in accordance with published shop labor rates pre-approved by the Landoll Corporation Warranty Staff. Time authorized for specific work will be limited, where appropriate, to the hours listed in the Landoll Corporation authorized Flat Rate Schedule.

This Warranty Is Expressly In Lieu Of All Other Warranties Of Material, Workmanship, Design, Application Or Otherwise With Respect To Any Equipment, Whether Express Or Implied, Including Warranties Of Merchantability And Fitness For A Particular Purpose, And Of All Other Obligations Or Liabilities On The Part Of Landoll Corporation.

New Trailer Structure Schedule:

The Landoll Corporation shall bear that portion of repair or replacement costs, for the new Trailer Structure found to be defective, within a sixty(60, 5 year) month warranty period prorated on the following basis:

- One (1) Year - 100%
- Two (2) Years - 80%
- Three (3) Years - 70%
- Four (4) Years - 60%
- Five (5) Years - 50%

Bottom Dump, Industrial And Utility Tag Trailer Exemption:

All Bottom Dump, Industrial and Utility Tag Trailers are exempt from the 5 year structural warranty and carry a Twelve(12) month limited structural warranty, due to the rugged and abusive off road nature in which these units typically operate, and are subject to the Component Schedule below.

Component Schedule:

Components manufactured by the Landoll Corporation (other than the Structure) and Components supplied by other manufacturers shall be warranted under the following schedule:

- I. **Coverage 1st Year 100%, Over 1 Year 0% (Parts and Labor)**
Axles, Suspensions, Landing Gear, Wheels, Rims, Hubs, Rollers and Cam Followers, Hydraulic Valve Body, and other Landoll Components.
- II. **Coverage First 6 Months 100%, Over 6 Months 0% (Parts and Labor)**
Air Lines, Springs, Air Bags, Leveling Valves, Bearings, Brake Valves, Paint, Oil Seals, Engines, Brake Drums, Shock Absorbers, Cylinders, Wear Plates, Hydraulic Hoses & Connections, Electrical (See Section V Below).
- III. **Coverage:** Warranty Claims must be made directly to the tire dealers.
Tires and Tubes
- IV. **Coverage:** 0%
Wood Components
- V. **Coverage:** The physical Grote lights are warranted for 10 years.
Labor is covered for 6 Months. (See Section II).
The Grote bumper harness is covered for 7 years. All other harnesses are covered for 5 years provided the harness has not been modified, by anyone, in any way.

Trailer Warranty Exclusions:

This warranty does not expand, enlarge upon or alter in any way, the warranties provided by the original manufacturers and suppliers of component parts and accessories. This warranty excludes such parts or accessories which are not defective, but may wear out and have to be replaced during the warranty period, including, but not limited to, light bulbs, paint, brake lining, brake drums and wood pieces. *Tire Warranties are expressly excluded from the Landoll Corporation warranty herein.* Purchaser is expected to pay all repairs or replacement costs, in connection with this Agreement, including all sales and other pertinent taxes immediately upon completion of warranty work performed.

Limitation Of Liability:

The Landoll Corporation shall not be liable to the purchaser for any incidental or consequential damages suffered by the purchaser, including, but not limited to, any commercially reasonable charges, expenses or commissions incurred in connection with effecting cover or any other reasonable expense incident to the delay or other breach of warranty by the Landoll Corporation, any loss of or damage to any cargo loaded or shipped in or on the Trailer, loss of anticipated profits, transportation expenses due to repairs, non-operation or increased expense of operation costs of purchased or replaced equipment, claim of customers, cost of money, any loss of use of capital or revenue, equipment rental, roadside assistance, or for any other special damage or loss of any nature arising at any time or from any cause whatsoever.

Limitation Of Remedy:

In the event the Landoll Corporation fails to repair the Trailer subject to the warranty contained herein, the purchaser's sole and exclusive remedy against the Landoll Corporation shall be for the repair or replacement of any defective part or parts of the Trailer subject to work or repair within the time period and manner set forth herein. This exclusive remedy shall not be deemed to have failed of its essential purpose so long as the Landoll Corporation is willing and able to repair or replace defective parts in the prescribed manner.

Trailer Delivery Information

The delivery information provided below is **NOT** intended to replace product registration. Refer to product registration instructions as provided in the **Trailer Division Service and Parts Warranty Policy and Procedures Manual**.

Trailer Serial Number _____

Delivery Date _____

Product _____

Model Number _____

Owner's Name _____

Mailing Address _____

City / State / Zip _____

Phone _____

Fax _____

Email _____

Type of company _____

Dealer's Name _____

Mailing Address _____

City / State / Zip _____

Phone _____

Fax _____

Email _____

Owner's Signature _____ Date _____

Dealer's Signature _____ Date _____

Landoll Corporation • 1900 North Street • Marysville, KS 66508 • Ph: (785) 562-5381 • Fax: (785) 562-4853