
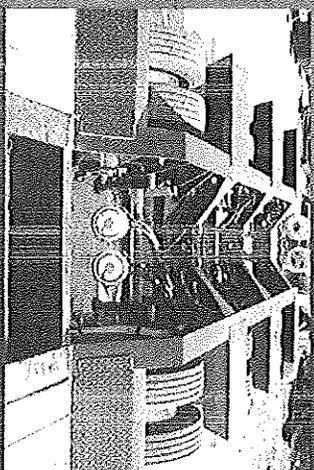



INTERSTATE

102,000 LB.
CARRYING CAPACITY

AIR RIDE SUSPENSION
WITH LIFT 3RD AXLE

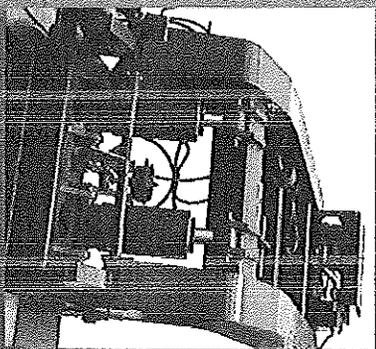

FOUR (4) BEAM
CONSTRUCTION
WITH INTERLOCKING
CROSSMEMBERS

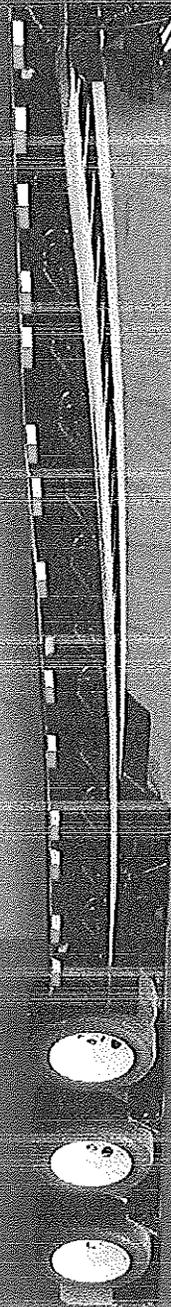

Call Factory For
Dealer Nearest You:

1-800-433-5384


THE
DEFINITION
OF VALUE

102500GN

www.interstatetrailers.com

INTERSTATE TRAILERS, INC.

Model: 102SDGN

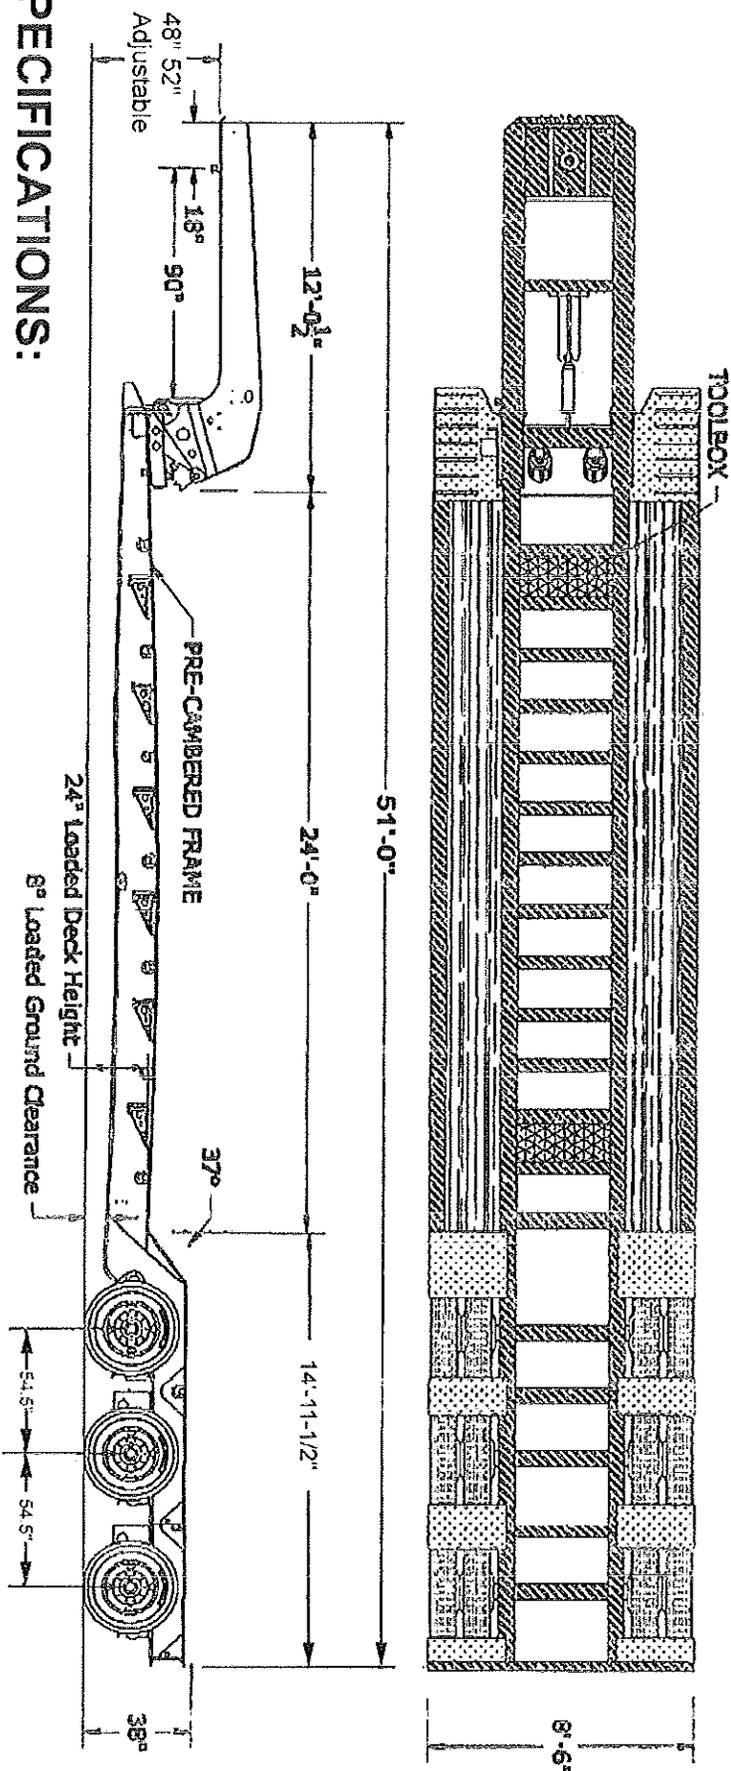

SPECIFICATIONS:

- Load Capacity: 102,000 lbs. in 16'
- Weight: 19,600 lbs.
- Overall Length: 51'-0"
- Width: 8'-6"
- Deck Length: 24'-0"
- Deck Height: 24" Loaded.
- Gooseneck: Hydraulic Removable, Non-Ground Bearing, (5) Position Ride Hgt., (2) 8" Lift Cylinders.
- Hydraulic operation: Wetline.
- Fifth Wheel Hgt.: 48" - 52" Adjustable.
- King Pin Plate: 5/16"
- King Pin: 18" Setting, 90" Swing Clearance.
- Decking: 1-3/4" Apitong Covered Outside, Center Open.
- Outriggers: 11 Per Side.
- Tie Downs: (16) Eight Per Side.
- Lights & Wiring: Rubber Mounted LED Lights & Sealed Wiring Harness.

Frame:

- Pierced Main Beam Construction With One Piece, Interlocking Crossmembers.
- True (4) Beam Construction With Positive Camber and Tapered Frame Design.
- Main Beams: 16" Fabricated I-Beams.
- Crossmembers: 8" I-Beams X 13 lbs. per ft., 60,000 lb. psi. on 20" Centers.
- "V" Crossmembers With Steel Grating In Bottom.
- Air Ride With Auto & Manual Controls.
- 25,000 lb. Capacity, 77.5" Track.
- 255/70R22.5 (H) Low Profile Radials.
- 8.25 x 22.5 Steel Disc, Hub Piloted.
- 16-1/2" x 7" With Air Activated Outboard Drums And Automatic Slack Adjusters.
- Spring Parking Brakes.

INTERSTATE TRAILERS, Inc.

DATE: _____
ORIG. PURCH. _____

SERIAL NO. _____
MODEL NO. _____

LIMITED WARRANTY

Interstate Trailers, Inc. warrants each new vehicle manufactured by us to be free from defects in material and workmanship under normal use and service for a period of one year from date of delivery to the original purchaser.

Our obligation under this warranty is to replace free of charge, FOB our factories or at our dealers place of business, any part proven defective within the time limit of this warranty. **Interstate Trailers must receive immediate notification of a defect and must give written authorization before any repairs are made.**

Interstate Trailers' warranty does **NOT** cover: (1) New products which have been operated in excess of rated capacities, (2) Misuse or accidents, (3) Vehicles which have been altered, modified or repaired in any manner not authorized by our company, (4) Second hand or used vehicle. In no way will Interstate Trailers be held liable for consequential damages such as rentals of substitute vehicles, loss of profits or other commercial losses or for damage by flood, fire or act of God.

Suspension alignments required as a result of a manufacturing deficiency are covered for 30 days after delivery to end user. Thereafter, all adjustments will be considered owner maintenance responsibility.

Further, new vehicle tires are warranted by their respective manufacturers and are not warranted by Interstate Trailers. Interstate Trailers will handle disposition of warranties on all other purchased components such as axles, suspensions, wheels and other purchased parts in conjunction with their respective manufacturers, and under the terms of their respective warranty policies.

Interstate Trailers, Inc. reserves the right to make changes in design and changes or improvements upon its equipment without imposing obligations upon itself to install the same upon its products theretofore manufactured.

THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED BY LAW OR OTHERWISE, AND THERE IS NO WARRANTY OF MERCHANTABILITY OR FITNESS OF PURPOSE.

Customer Registration Required By Law

Federal regulations require motor vehicle manufacturers to maintain a record of original owners of their equipment. Our Warranty Registration fulfills this requirement. Please make every effort to complete this document.