


TYPICAL TRENCH DETAIL

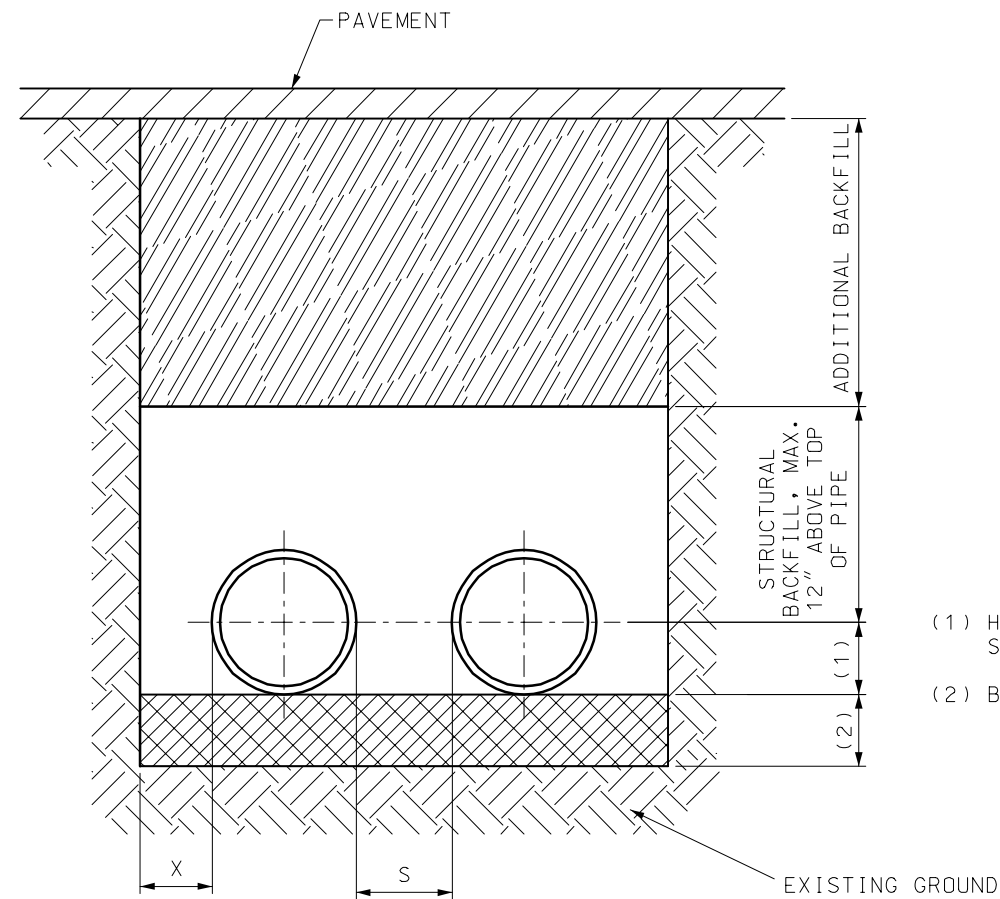

PARALLEL PIPE INSTALLATION
TYPICAL TRENCH CROSS-SECTION

TABLE I
CORRUGATED POLYETHYLENE CIRCULAR PIPE

SPECIFIED DIA OF PIPE (IN.)	MIN OVERFILL HEIGHT (FT)	MAX OVERFILL HEIGHT* (FT)	TRENCH WIDTH (IN.)
12	1	38	34
15	1	39	38
18	1	40	44
24	1	40	54
30	1	40	64
36	1	38	74
42	2	10	84
48	2	9	91

* MAXIMUM OVERFILL MEASURED FROM THE TOP OF PIPE TO SURFACE.

PIPE SIZE	S (IN.)	X (IN.)
12	12	9
15	12	9
18	12	9
24	12	10
30	15	16
36	18	18
42	21	1"
48	24	18

CONSTRUCTION SEQUENCE

1. PLACE BEDDING MATERIAL TO GRADE.
2. COMPACT BEDDING OUTSIDE THE MIDDLE THIRD OF THE PIPE.
3. INSTALL PIPE TO GRADE.
4. PLACE AND COMPACT THE HAUNCH AREA UP TO THE SPRINGLINE.
5. COMPLETE BACKFILL ACCORDING TO SPECIFICATIONS.

LEGEND

D_i = NORMAL INSIDE DIAMETER OF PIPE.
 D_o = OUTSIDE DIAMETER OF PIPE.
 H = FILL COVER HEIGHT OVER PIPE (FEET).
 MIN. = MINIMUM
 MAX. = MAXIMUM

 = UNDISTURBED SOIL

MISSOURI HIGHWAYS AND TRANSPORTATION
COMMISSION


CORRUGATED POLYETHYLENE PIPE INSTALLATION METHODS

DATE: _____

EFFECTIVE: 07-01-2004

730.00B

1
2

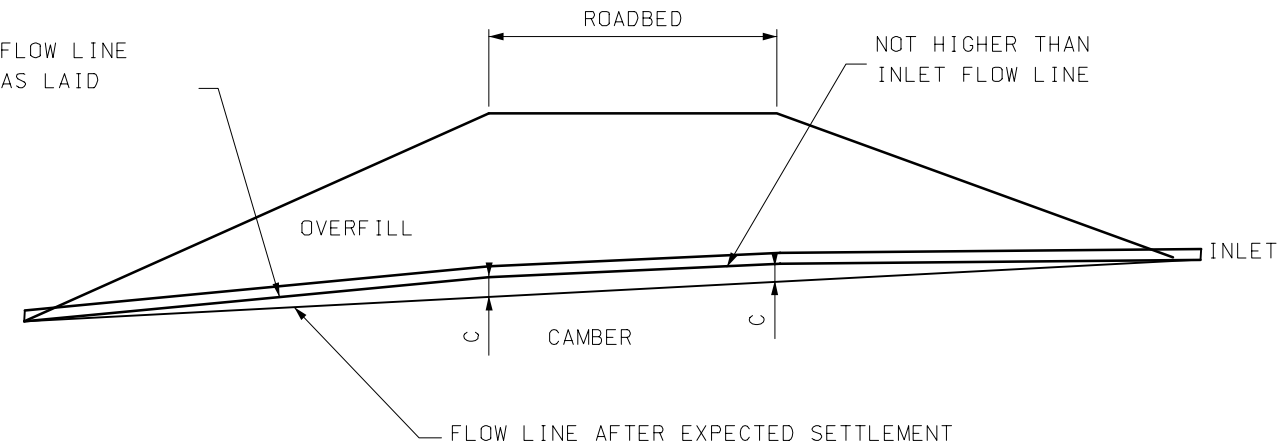

NOTE:

ON YIELDING SOIL, PIPE CULVERTS SHALL BE PLACED ON A CAMBERED FLOW LINE. THE AMOUNT OF CAMBER WILL VARY WITH SOIL CONDITION AND WILL BE SPECIFIED ON THE DESIGN PLANS.

TYPICAL CAMBERED FLOW LINE

TABLE 11				
MINIMUM COVER FOR CONSTRUCTION LOADS				
PIPE DIA. (IN.)	MINIMUM COVER (FT) FOR INDICATED AXLE LOADS (THOUSANDS OF POUNDS)			
	18-50	50-75	75-110	110-150
12-36	2.0	2.5	3.0	3.0
42-48	3.0	3.0	3.5	4.0

THE CONTRACTOR SHALL PROVIDE MINIMUM COVER PLUS ANY ADDITIONAL COVER REQUIRED TO AVOID DAMAGE TO THE PIPE. IN UNPAVED SITUATIONS, THE SURFACE MUST BE MAINTAINED TO A LEVEL AND NON-RUTTED CONDITION.

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION			
	CORRUGATED POLYETHYLENE PIPE INSTALLATION METHODS		
DATE: _____	EFFECTIVE: 07-01-2004	730.00B	<div>22</div>